WINCH*TRAILER*TRUCK*JEEP*POWERSPORTS*WORK

WINCH*TRAILER*TRUCK*POWERSPORTS*WORK TRUCK*MOUNTS*ROPES

TRUCK*MOUNTS*ELECTRICAL*WIRING*SWITCHES*CONNECTORS*RIGGING



- WINCHES
- HOIST
- MOUNTS
- ELECTRICAL
- RIGGING

*ELECTRICAL*COVERS*HOOKS*CARGO CONTROL*STRAPS

623-581-0121 phone
customer@bulldogwinch.com
www.bulldogwinch.com

BULLDOG WINCH
was founded on the principles of:

Quality
Innovation
Value
Superior Customer Service

BULLDOG WINCH offers an extensive line of Truck, Trailer and Powersports winches with a broad assortment of accessories.

We believe that our customers deserve the best quality product at the best price. That's what we deliver!

We test our products under the toughest conditions with professional ULTRA 4 race teams.

If you believe in pushing your vehicle to the limit, then you need ***BULLDOG WINCH*** along for the ride.

ADDITIONAL CATALOGS AVAILABLE FOR AIR AND SPORTSMAN COOLER CATEGORIES





MAKING A BETTER WINCH

BULLDOG WINCH is proud to sponsor several professional rock crawler teams. We do this for several reasons but one of the most important is to push our winches to the extreme and use this experience to make better winches for our customers.

We sure don't recommend that you, our customers, do anything similar to what these pro racers are doing but we want you to see the harsh conditions that our winches are put through and how they stand up.

Congratulations to their success and may we continue to be a part of it!!







WIRE ROPE



- HEAVY DUTY STEEL HOUSING AND FRAME COMPONENTS FOR MAXIMUM STRENGTH
- PREMIUM SERIES WOUND MOTOR FOR MAXIMUM PERFORMANCE
- POWERS LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT

SPECIFICATIONS:

Control: Remote hand held with 4. 5m lead
Gear Train: 4 stage planetary
Gear Ratio: 505:1
Clutch: Pull and turn
Brake: Automatic in the ratchet wheel
Drum Dia x L: 3. 46" x 8.66"(88mm x 220mm)
Battery Leads: 2.4m
Overall Dimensions(L x W x H): 27.76" x 10.5" x 12.5"
(705 x 266 x 318mm)
Inside Mounting Bolt Pattern:10" x 4.5"
(254 x 114.3mm)
Middle Mounting Bolt Pattern: 10" x 6.5"
(254 x 165.1mm)
Outside Mounting Bolt Pattern: 10" x 8.5"
(254 x 215.9mm)
2 Year Limited Warranty

SYNTHETIC



RECOMMENDED FOR MAXIMUM PERFORMANCE:

- 650CCA BATTERY FOR MAXIMUM POWER
- SNATCH BLOCK/PULLEY BLOCK TO DOUBLE LINE FOR LOADS OVER 6000LBS

*** VERSATILE MOUNTING - CLOCKABLE GEAR BOX - REMOTE MOUNTABLE POWER UNIT

KIT INCLUDES :


WIRE ROPE

or


Synthetic Rope



20398 15' Controller



20425 Contactor

16,500LB

Rated Line Pull: 16,5000lbs (7484kgs)

Motor: 12V DC 5. 6hp(4.2kW) Series Wound

PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	18(5.5)	40
4000(1815)	8.8(2.7)	100
8000(3632)	6.6(2.0)	180
12000(5448)	5.5(1.7)	240
16500(7484)	3.6(1.1)	360

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	16500(7484)	18.3(5.6)
2	13306(6041)	41.3(12.6)
3	11149(5061)	68.8(21)
4	9593(4355)	92(28)

18,500LB

Rated Line Pull: 18,5000lbs (8391kgs)

Motor: 12V DC 4. 9hp(3. 7kW) Series Wound

PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	18.7(5.7)	50
6000(2722)	10.8(3.3)	130
8000(3632)	5.5(1.7)	190
12000(5448)	4.9(1.5)	230
18500(8391)	3.2(1.0)	310

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	18500(8391)	17.7(5.4)
2	14713(6680)	40(12.2)
3	12212(5544)	66.6(20.3)
4	10439(4739)	82(25)

WIRE ROPE & ROLLER FAIRLEAD KIT

PART#10057

- **Wire Rope Dia x L:** 15/32" x 92'(12mm x 28m)
- **Fairlead**: Roller
- **Weight:** N.W. 185lbs (84kgs)

PART#10059

- **Wire Rope Dia x L:** 1/2" x 85.3'(13mm x 25m)
- **Fairlead**: Roller
- **Weight:** N.W. 187lbs (85kgs)


SYNTHETIC ROPE &HAWSE FAIRLEAD KIT

PART#10058

- **Rope**: 12mm x 92ft Synthetic Rope
- **Fairlead**: CNC Machined Billed Aluminum
- **Weight:** N. W. 172lbs(78kgs)

PART#10060

- **Rope**: 13mm x 82ft Synthetic Rope
- **Fairlead**: CNC Machined Billed Aluminum
- **Weight:** N. W. 174lbs(79kgs)

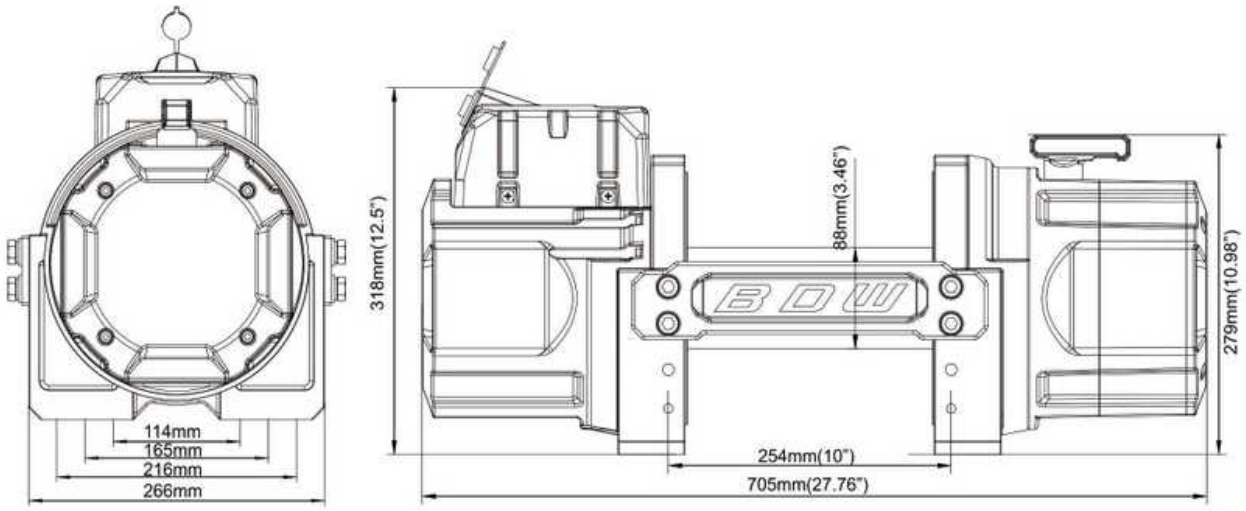

OPTIONAL ACCESSORIES :



20408 20408-9 20396 20402



PART#10063

- HEAVY DUTY STEEL HOUSING AND FRAME COMPONENTS FOR MAXIMUM STRENGTH
- PREMIUM SERIES WOUND MOTOR FOR MAXIMUM PERFORMANCE
- POWERS LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK ROPE DEPLOYMENT



PART#10064

SPECIFICATIONS:


Rated Line Pull:15,000lbs(6804kgs)
Motor: 12V DC 6.0hp(4.5KW) Series Wound
Control: 12'
Gear Train: 4 stage planetary
Gear Ratio: 516:1
Clutch: Pull and turn
Brake: Mechaical, Automatic load holding
Drum Dia x L: 3. 46" x 8.66"(88mm x 220mm)
Battery Leads: 2ga x 5.9'
Overall Dimensions(L x W x H):
25.3" x 8.46" x 11.34"(642 x 215 x 288mm)
Mounting Bolt Pattern:10" x 4.5" (254 x 114.3mm)
2 Year Limited Warranty

PART#10063

Wire Rope Dia. x L: 29/64" x 92'(11.5mmx28m)
Net Weight: 150lbs.(68lkgs)

PART#10064

Rope Dia. x L: 11.5x92'(11.5mmx28m)
Net Weight: 117lbs.(53lkgs)

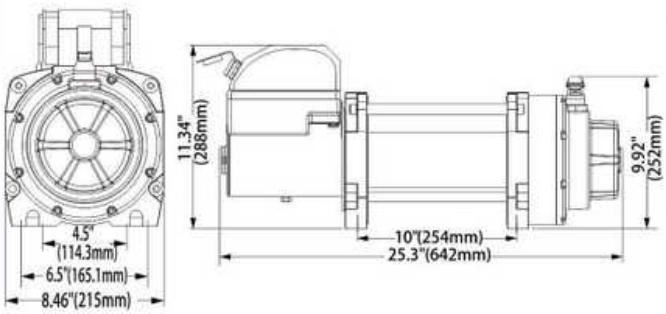

PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	12.4(3.8)	95
8000(3629)	5.6(1.7)	260
10000(4536)	4.9(1.5)	280
12000(5443)	4.6(1.4)	300
15000(6804)	3.3(1.0)	380

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum
1	15000(6804)	19.4(5.9)
2	12000(5442)	43.3(13.2)
3	10000(4536)	71.9(21.9)
4	8800(3995)	92(28)

RECOMMENDED FOR MAXIMUM PERFORMANCE:

- 650CCA BATTERY FOR MAXIMUM POWER
- SNATCH BLOCK/PULLEY BLOCK TO DOUBLE LINE FOR LOADS OVER 6000LBS

KIT INCLUDES :



Wire Rope fo 10063



Synthetic Rope for 10064



20144



20425

OPTIONAL ACCESSORIES:



20147



20149B



20408
20408-8

VERSATILE MOUNTING - CLOCKABLE GEAR BOX
- REMOTE MOUNTABLE POWER UNIT

ALPHA

PART#10047



EXTREME WATER RESISTANCE IP68


- LIMITED LIFETIME WARRANTY
- PREMIUM SERIES WOUND MOTORS &THICKER FRAMES
- WATER/WEATHER RESISTANT 500A SEALED CONTACTOR SWITCH
- THERMAL LIMITING SWITCH FOR MOTOR OVERHEAT PROTECTION
- HEAVY-DUTY ROLLER FAIRLEAD
- STAINLESS STEEL HARDWARE
- EXCELLENT WATER RESISTANCE
- BEST DUTY CYCLE

SPECIFICATIONS:

Rated Line Pull:15,000lbs(6804kgs)
Motor: 12V DC 6.8hp(5.0KW) Series Wound with heat sink
Control: 12'
Gear Train: 3 stage planetary
Gear Ratio: 262:1
Clutch: Freespooling/sliding ring gear
Brake: Automatic load hold in drum
Drum Dia x L: 3.0" x 9.0"(76mm x 224mm)
Battery Leads: 6ft
Overall Dimensions(L x W x H):
23" x 6.7" x 9.8"
(552 x 170 x 250mm)
Mounting Bolt Pattern:
10" x 4.5" (254 x 114.3mm)
2 Year Limited Lifetime Warranty

PART#10047
Wire Rope Dia. x L: 7/16" x 85'(11mm x 26m)
Net Weight: N.W. 97lbs (46kgs)

PART#10048
Rope Dia. x L: 12mm x 80ft Premium Synthetic Rope
With 6ft Protective Sleeve
Net Weight: N. W. 77.4lbs(35.2kgs)

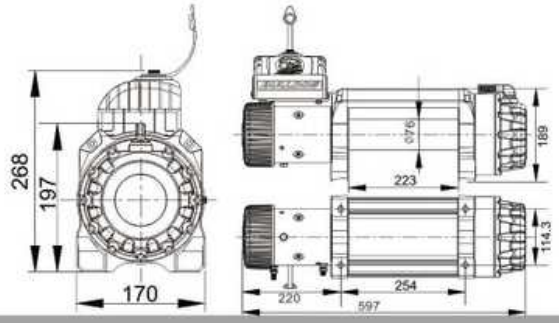

PART#10048



PULL, SPEED, AMPS

Line Pull lbs(kgs)	Line Speed ft/min(m/min)	Current A
0	19.7(6.0)	70
2,000 (907)	10.2(3.1)	150
4,000 (1814)	8.5(2.60)	200
8,000(3629)	7.9(2.40)	250
12,000(5443)	5.9(1.80)	330
15,000(6804)	3.9(1.20)	420

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs(kgs)	Total Rope on Drum ft(m)
1	15,000(6804)	15.1(4.6)
2	12,800(5806)	35.1(10.7)
3	11,000(4990)	59.7(18.2)
4	9,800(4445)	85.3(26)

RECOMMENDED FOR MAXIMUM PERFORMANCE:

- 650CCA BATTERY FOR MAXIMUM POWER
- SNATCH BLOCK/PULLEY BLOCK TO DOUBLE LINE FOR LOADS OVER 6000LBS

KIT INCLUDES :



Braided Wire Protector



Thermal Limiting Switch With Led Light Feedback Built-in Overheat Protection



20296 for 10047



20288 for 10048


20129 450A



20002



20125B

OPTIONAL ACCESSORIES :



20175B



20408 20408-10

VERSATILE MOUNTING - CLOCKABLE GEAR BOX - REMOTE MOUNTABLE POWER UNIT

PART#10065

NEW

EXTREME WATER RESISTANCE IP68



- PREMIUM SERIES WOUND 5.5 HP MOTOR FOR MAXIMUM PERFORMANCE
- POWERS LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK ROPE DEPLOYMENT
- RELOCATABLE POWER UNIT FOR TIGHT MOUNTING LOCATIONS
- EXTREME WATER RESISTANCE
- CLOCKABLE GEAR BOX


PART#10066



SPECIFICATIONS:

Rated Line Pull:9,500lbs (4310kgs)
Motor: 12V DC 5. 5hp(4.0KW) Series Wound
Control: Remote hand held with 12' lead and 82' wireless
Gear Train: 3 stage planetary
Gear Ratio: 218:1
Clutch: Freespooling
Brake: automatic load hold
Drum Dia x L: 2.5" x 8.8" (63.5mm x 224mm)
Battery Leads: 6' (1.8m)
Overall Dimensions(L x W x H):
21.5"x6.3"x10.4" (547x160x265mm)
Mounting Bolt Pattern:
10" x 4.5" (254 x 114.3mm)
Limited lifetime warranty

PART#10065
Wire Rope Dia. x L: 21/64" x 100' (8.3mm x 30.48m)
Net Weight: 80.3lbs.(36.5kgs)
PART#10066
Rope Dia. x L: 9mmx85'(9mmx26m)
Net Weight: 58.3lbs.(26.5kgs)

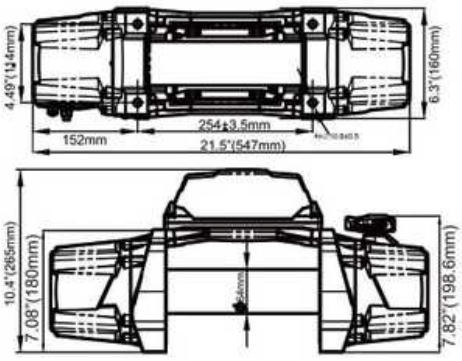

PULL, SPEED, AMPS

Line pull (lbs / kgs)	Line speed (fpm / mpm)	Motor Amps
0	33.5 / 10.2	68
3000 / 1363	14.76 / 4.5	175
6000 / 2727	9.8 / 3	264
9500 / 4310	7.38 / 2.25	354

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated line pull (lbs/kgs)	Rope capacity (ft/m)
1	9500 / 4310	18.3 / 5.59
2	7716 / 3507	40.9 / 12.5
3	6496 / 2953	67.7 / 20.63
4	5609 / 2549	85/26 to 100/30

RECOMMENDED FOR MAXIMUM PERFORMANCE:
- 650CCA BATTERY FOR MAXIMUM POWER

KIT INCLUDES :



Wire Rope For 10065



Synthetic Rope For 10066



20438



20437

OPTIONAL ACCESSORIES:



20443

••• VERSATILE MOUNTING - CLOCKABLE GEAR BOX
- REMOTE MOUNTABLE POWER UNIT

PART#10067

NEW

EXTREME WATER RESISTANCE IP68



- PREMIUM SERIES WOUND 6.0 HP MOTOR FOR MAXIMUM PERFORMANCE
- POWERS LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK ROPE DEPLOYMENT
- RELOCATABLE POWER UNIT FOR TIGHT MOUNTING LOCATIONS
- EXTREME WATER RESISTANCE
- CLOCKABLE GEAR BOX


PART#10068



SPECIFICATIONS:

Rated Line Pull:12,000lbs(5454kgs)
Motor: 12V DC 6.0hp(4. 5KW) Series Wound with heat sink
Control: Remote hand held with 12' lead and 82' wireless
Gear Train: 3 stage planetary
Gear Ratio: 265:1
Clutch: Freespooling
Brake: Automatic load hold
Drum Dia x L: 2.5" x 8.8" (64mm x 224mm)
Battery Leads: 6' (1.8m)
Overall Dimensions(L x W x H):
21.5"x6.3"x10.4" (547x160x265mm)
Mounting Bolt Pattern:
10" x 4.5" (254 x 114.3mm)
Limited Lifetime Warranty

PART#10067
Wire Rope Dia. x L: 3/8" x 90' (9.5mm x 27.4m)
Net Weight: N.W. 85lbs (38. 7kgs)
PART#10068
Rope Dia. x L: 9.5mm x 85' (9.5mm x 26m)
Net Weight: N. W. 59lbs(26. 9kgs)

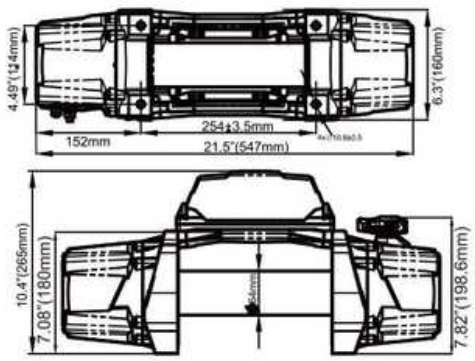

PULL, SPEED, AMPS

Line pull (lbs / kgs)	Line speed (fpm / mpm)	Motor Amps
0	26.2 / 8	74
3000 / 1363	11.6 / 3.5	150
6000 / 2727	7.7 / 2.35	225
9000 / 4090	5.5 / 1.7	270
12000 / 5454	4.6 / 1.4	378

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated line pull (lbs/kgs)	Rope capacity (ft/m)
1	12000 / 5454	16.9 / 5.15
2	9522 / 4328	38.07 / 11.6
3	7892 / 3587	63.5 / 19.36
4	6738 / 3063	85/26 to 90/27.4

RECOMMENDED FOR MAXIMUM PERFORMANCE:

- 650CCA BATTERY FOR MAXIMUM POWER

KIT INCLUDES :



Wire Rope For 10067



Synthetic Rope For 10068



20438



20437

OPTIONAL ACCESSORIES:



20443

*** VERSATILE MOUNTING - CLOCKABLE GEAR BOX
- REMOTE MOUNTABLE POWER UNIT

PART#10041



- HEAVY DUTY STEEL HOUSING AND FRAME COMPONENTS FOR MAXIMUM STRENGTH, DURABILITY AND RELIABILITY
- PREMIUM SERIES WOUND MOTOR FOR MAXIMUM PERFORMANCE
- POWERS LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- SEALED 450AMP CONTACTOR
  DURABLE
  DEPENDABLE
- GOOD DUTY CYCLE

PART#10044



SPECIFICATIONS:

Rated Line Pull:8,000lbs (3629kgs)
Motor: 12V DC 5. 2hp(3.8KW) Series Wound
Control: Remote hand held with 3.7m lead
Gear Train: 3 stage planetary-clockable
Gear Ratio: 235:1
Clutch: Freespooling
Brake: Automatic load hold in drum
Drum Dia x L: 2.5" x 8.8"(63.5MM x 223.5MM)
Battery Leads: 3GA x 6'
Overall Dimensions(L x W x H):
WITH POWER UNIT
21" x 9.45" x 6-1/4"(553.8 x 240 x 162MM)
WIHTOUT POWER UNIT
21" x 8-1/4" x 6-1/4"(553.8 x 213 x 162MM)
Mounting Bolt Pattern:10" x 4.5" (254 x 114.3mm)
2 Year Limited Warranty

PART#10041
Wire Rope Dia. x L: 5/16" x 100' (8.1mm x 30.48m)
Net Weight: 80lbs.(36kgs)

PART#10044
Rope Dia. x L: 8mmx85'(8mmx26m)
Net Weight: 59lbs.(27kgs)

- **REMOVEABLE/REMOTE MOUNTABLE**
  POWER UNIT FOR MOUNTING IN TIGHT SPACES
  -MOUNTS OVER DRUM, OVER MOTOR, OR OFF WINCH

EXTRA BRACKETS INCLUDED
TO MOUNT POWER UNIT
OVER MOTOR




PULL, SPEED, AMPS


Line Pull (lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	22(6.7)	80
4000(1814)	12(3.7)	200
6000(2722)	9(2.7)	270
8000(3632)	6.5(2)	330

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	8000(3629)	19.6(6.0)
2	6540(2966)	42.6(13.0)
3	5500(2495)	72(22)
4	4750(2155)	100(30.48)

RECOMMENDED FOR MAXIMUM PERFORMANCE:
- 650CCA BATTERY FOR MAXIMUM POWER

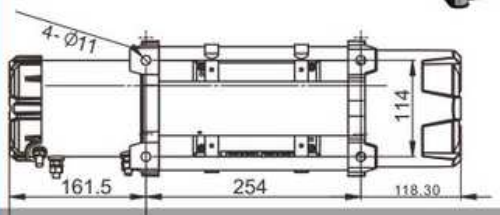

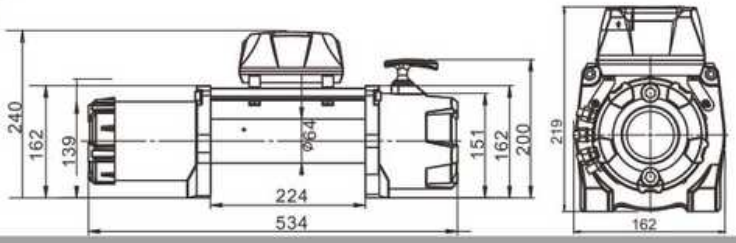

KIT INCLUDES :



20108 Wire Rope
For 10041



Synthetic Rope
For 10044



20289



20204

OPTIONAL ACCESSORIES:



20309



20408
20408-2

••• VERSATILE MOUNTING - CLOCKABLE GEAR BOX
- REMOTE MOUNTABLE POWER UNIT

8288 COMP WINCH



PART #10009

- THIS IS THE WINCH OUR PROFESSIONAL RACE TEAMS ARE USING.
- HIGH SPEED 55FT/MIN, NO LOAD LINE SPEED
- SHORT DRUM WITH 75FT OF PREMIUM SYNTHETIC ROPE
- CNC MACHINED ALUMINUM HAWSE FAIRLEAD
- CRMO SLING-HOOK

SPECIFICATIONS:

Rated Line Pull: 8, 288lbs (4227kgs)

Motor: 12V DC 6. 8hp(4.4kW) Series Wound

Control: Remote hand held with 12'(3.7m) lead

Gear Train: 3 stage planetary

Gear Ratio: 138:1

Clutch: Freespooling/sliding ring gear

Brake: Automatic load hold in drum

Drum Dia x L: 3" x 5.3"(76mm x 135mm)

Battery Leads: 2ga x 6' (1.83m x 1.83m)

Overall Dimensions(L x W x H):

19.8" x 6.5" x 7.25"

Mounting Bolt Pattern:6" x 4.5" (152 x 114.3mm)

Weight: N.W.63.6lbs(28.9kgs)

Limited Lifetime Warranty

PULL, SPEED, AMPS


Line Pull(lbs/kgs)	Line Speed FPM(m/min)	Motor(Amps)
0	55(19.8)	58
2000(907)	19.7(6)	160
4000(1814)	14.1(4.3)	220
6000(2722)	12.5(3.8)	280
8288(3760)	11.2(3.4)	360

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull(lbs/kgs)	Total Rope On Drum(ft/m)
1	8288(3760)	19.6(6)
2	6400(2903)	43(13.2)
3	5300(2404)	72(22)
4	4700(2132)	75(23)

Recommended for Maximum Performance:

- 650CCA Battery For Maximum Power
- Snatch Block/pulley Block To Double Line For Loads Over 5000lbs

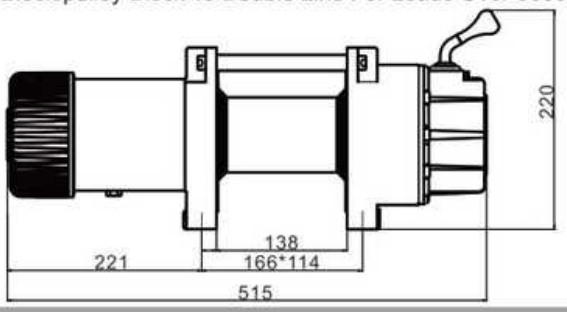

KIT INCLUDES :



Braided Wire Protector



Thermal Limiting Switch With Led Light Feedback - Built-in Overheat Protection



20086



20124



20129 450A



20274



20125B

OPTIONAL ACCESSORIES :



20408 20408-10

••• VERSATILE MOUNTING - CLOCKABLE GEAR BOX
- REMOTE MOUNTABLE POWER UNIT

NEW

PART#11002



IP67


ENGINEERING DATA		
Rated Pulling Force:	15000 lbf	6804 kgf
Drum Barrel Diameter:	5 in	126 mm
Drum Flange Diameter:	10.24 in	260 mm
Drum Width:	8.2 in	208 mm
Evaluated Rope Diameter:	1/2 in	13 mm
Maximum Wire Rope Diameter:	1/2 in	13mm
Minimum Wire Rope Breaking Strength:	32845 lbf	14898kgf
Maximum Layers of Wire Rope:	5 with 1/2in rope	
Gear Train:	Planetary	
Gear Reduction:	17.3:1	
Mounting Bolt Size:	M12 X 25 Class 8.8	
Mounting Bolt Torque:	46-51 lbf-ft	63-69 Nm
Approximate Shipping Weight:	143.3lbf	65 kg
Brake Type:	Automatic Disc Brake	
Sealing:	IP67	
Corrosion Resistance:	408 hrs per ASTM B117	
Operating Temperature:	-40°F to 158°F (-40°C to 70°C)	
EMC Emissions:	N/A	
EMC Immunity:	N/A	

FIRST LAYER PERFORMANCE						
LINE LOAD		PRESSURE DROP AT 10 GPM		PRESSURE DROP AT 15 GPM		DUTY CYCLE
lbf	kgf	psi	BAR	psi	BAR	min/10min
0	0	0	0.0	0	0.0	N/A
2500	1134	1450	100.0	1579	108.8	N/A
5000	2268	1740	120.0	1998	137.7	N/A
7000	3402	1972	136.0	2320	160.0	N/A
10000	4536	2233	154.0	2407	166.0	N/A
12500	5670	2502	172.5	2537	174.9	N/A
15000	6804	2726	188.0	2784	192.0	N/A

- HEAVY DUTY STEEL HOUSING AND FRAME COMPONENTS FOR MAXIMUM STRENGTH
- PLANETARY GEAR TRAIN
- INCLUDES WIRE ROPE 1/2"×98.4'(φ13mm×30m)
- MEETS SAE J706
- FREESPOOLING CLUTCH FOR QUICK ROPE DEPLOYMENT

PERFORMANCE BY LAYER					
DRUM LAYER	LINE LOAD*			LINE SPEED 15 GPM	
	lbf	kgf	kN	ft/min	m/min
1	15000	6804	68.0	19.7	6.0
2	12636	5732	57.3	23.3	7.1
3	10916	4952	49.5	27.0	8.2
4	9608	4358	43.5	30.8	9.4

HYDRAULIC SYSTEM SPECIFICATIONS		
Maximum System Pressure:	2030 psi	140 BAR
Maximum Rated Input Flow:	15.85 GPM	60 LPM
Maximum Rated Input Speed:	262	RPM
Control Valve Type:	Dual Balance Valve	

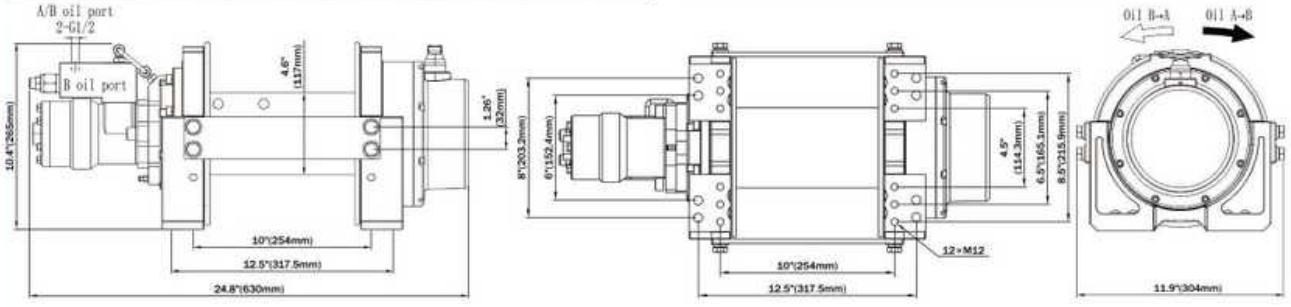

KIT INCLUDES :



20431 WIRE ROPE



20395 FAIRLEAD

OPTIONAL ACCESSORIES:



20427 Tensioner

PART#11004




- HEAVY DUTY STEEL HOUSING AND FRAME COMPONENTS FOR MAXIMUM STRENGTH
- PLANETARY GEAR TRAIN
- MEETS SAE J706


20000lb Winch Performance Speci?cations	
Item No.	11004
Rated line pull	20000lbs(9072kg)
Gear ratio	20:1
Max.Flow	18.5GPM(70L/min)
Max. pressure	2465PSI(17MPa)
Motor displacement	315mL/r 315cc/rev 19.22cu in/rev
Wire rope	35/64"×157.5'(Dia.14mm×48m)
Drum size	6.3"×11.02"(Dia.160mm×280mm)
Overall dimensions	38.5"×15.67"×13.5" (979×398×343mm) 37.95"×15.67"×13.5" (964×398×343mm)
Bolt pattern	13.5"×9"(342.9×228.6mm) 16.5"×9"(419.1×228.6mm)
Net weight	357lbs(162kg)


20000lb Winch Line Pull And Pressure Difference						
Single line pull	lbs	0	8000	12000	16000	20000
	kg	0	3632	5448	7257	9072
Pressure difference between Motor entry and exit	MPa	8	10.5	11.5	13	16

20000lb Winch Line Pull And Cable Capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	lbs	20000	17228	15130	13488
	kg	9072	7814	6863	6118
Line speed	Ft/min	20.6	23.9	27.2	30.5
	m/min	6.3	7.3	8.3	9.3
Cable capacity per layer	Ft.	28.9	63.3	102.7	157.5
	m	8.8	19.3	31.3	48

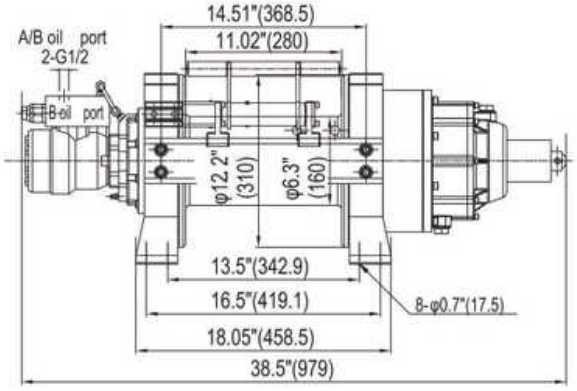

Pnuematic Connections

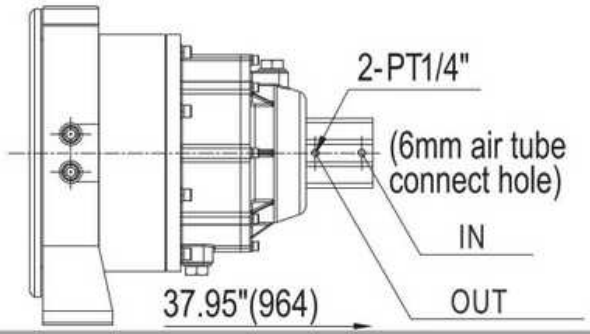

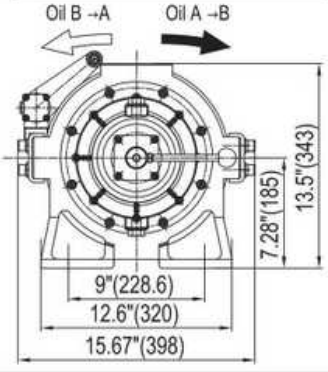

KIT INCLUDES :


Pnuematic Shifting


Tensioner

OPTIONAL ACCESSORIES :


20429 Fairlead



20430 Wire Rope with Hook

TRAILER WINCHES

Unique New Designs-
Designed for Trailer Manufacturers/Dealers/Installers/Users



Low Profile 8" Height

Narrow Drum With 50' Rope
Easier To Manage



Truck Winches Are Too High



Easy To Damage Truck Winches With Vehicle



Truck Winches Have 100' Rope Which Is Difficult To Manage

Trailer Winch Includes Mounting Plate - Truck Winches Do Not Include Mounting Plate



Wiring Kits To Connect Trailer Winch To Vehicle Charging System



Stand Alone Batteries Don't Have Enough Amps Which Starves, Overheats, and Burns Out Motors


BULLDOG WINCH 10031 7800 TRAILER WINCHES VS- BULLDOG WINCH 10041 8000 TRUCK WINCHES

HEIGHT MATTERS



COMMON TO PULL VEHICLE INTO TRUCK WINCH POWER UNIT & SHIFTER

- OUR TRAILER WINCHES ARE LOW PROFILE

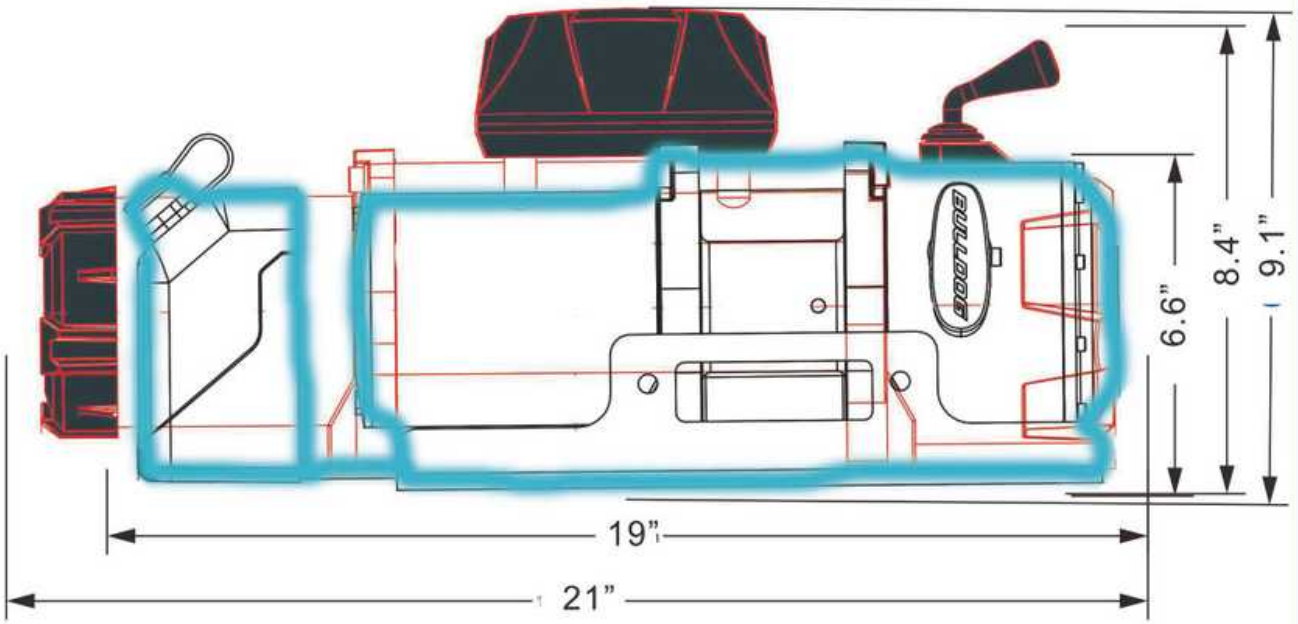

ROPE LENGTH MATTERS





TRUCK WINCH 100'
PROBLEM: BIRD NESTING
TRAILER WINCH 50' WITH TENSIONER

MOUNTING MATTERS:

- TRUCK WINCH DOESN'T INCLUDE MOUNTING PLATE
- TRUCK WINCH HAS HEX HEAD HARDWARE
- **OUR TRAILER WINCHES ALL INCLUDE MOUNTING PLATES WITH COUNTERSUNK HARDWARE**



BULLDOG WINCH 15017 3400 & 15019 4400 TRAILER WINCHES VS- POWERSPORTS WINCHES



Not All Winches Are Created Equal

BULLDOG WINCH 15017 3400 & 15019 4400 TRAILER WINCHES	POWERSPORTS WINCHES
All-in-one design - easy to mount	Winch, contactor, & switch are all separate and you have to mount and wire each separately - difficult to mount
Winch mounts to plate with counter sunk bolts - mounts flat to trailer deck	Uses hex head bolts which will cause problems mounting on flat trailer deck
Includes spring steel tension plate for wire rope - easy rope management & spooling	Tension Plate Usually Not Included - wire rope will unwind off drum when not under tension
20ft wired controller - use at back of most trailers	Includes handlebar switch or 8 to 12ft wired controller - not useful for trailers
Fairlead mounts to plate above deck level	Sometimes fairlead is below deck level - causes problems when mounting on trailer deck
Wireless Ready - easy plug-in mount and designed for exposed outdoor use	Wireless is hard wired and not designed for exposed outdoor use
Mechanical brake in drum - better for holding loads	Sometimes dynamic brake - not great for holding loads

BULLDOG WINCH 10029 5800 & 10031 7800 TRAILER WINCHES VS- TRUCK WINCHES



Not All Winches Are Created Equal

BULLDOG WINCH 10029 5800 & 10031 7800 TRAILER WINCHES	TRUCK WINCHES
All-in-one design - easy to mount - Includes mounting plate	Most do not include mounting plate - sold separately
Winch mounts to plate with counter sunk bolts - mounts flat to trailer deck	Uses hex head bolts which will cause problems mounting on flat trailer deck
Fairlead mounts to plate above deck level	Sometimes fairlead mounts below deck level - causes problems when mounting on trailer deck
Includes spring steel tension plate for wire rope - easy rope management & spooling	Tension Plate Not Included and usually not available - wire rope will unwind off drum when not under tension
47 to 55ft wire rope on narrow drum - long enough for most trailers and makes spooling easier/low maintenance	90 to 100ft wire rope on wide drum - causes lots of problems when used on trailer- rope can bunch up on one end and break winch
20ft wired controller - use at back of most trailers	Most Wired Controllers are 12ft and not useable on most trailers
Low profile - power unit, motor terminals, & shifter are all mounted low for clearance	Most power units, terminals & shifter are mounted on top of winch and it's easy to run into/break
Fits inside 20" box x 10" depth	Need at least 24" box with 12" depth

PART #10039



- 2-IN-1 WIRED AND WIRELESS CONTROLLER
- POWER LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- LOW PROFILE
- HEAVY DUTY TRUCK WINCH CHASSIS & GEAR BOX
- ROPE TENSIONER FOR EASY ROPE HANDLING



PART #10040

SPECIFICATIONS:

Rated Line Pull: 12,000lbs (5443kgs)
Motor: 12V DC 6.0hp(4.5kW) Series Wound
Control: Remote hand held with 20'(6.1m) lead
Gear Train: 3 stage planetary
Gear Ratio: 265:1
Clutch: Freespool
Brake: Automatic load hold
Drum Dia x L: 2.5"x 8.8"(63.5mm x 223.5mm)
Battery Leads: 1ga x 6ft (8mm x 1.83m)
Overall Dimensions(L x W x H): 24.01"x 7.23"x 8.23" (612 x 186 x 209mm)
Winch Mounting Bolt Pattern: 10" x 4.5" (254 x 114.3mm)
Plate Mounting Bolt Pattern: 13"x6.1" (330 x 154mm)

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 10039

- **Wire Rope Dia x L:** 3/8" x 90'(9.5mmx27.4m)
- **Fairlead:** Roller
- **Weight:** 93.5lbs / 42.5kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 10040

- **Synthetic Rope:** 9.5mm x 85ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 82.5lbs / 37.5kgs


2 Year Limited Warranty

PULL, SPEED, AMPS

Line Pull lbs. (kgs)	Line Speed ft./min. (m/min.)	Current A
0	21.3 (6.5)	65
2,000 (907)	11.5 (3.5)	126
4,000 (1814)	9.4 (2.9)	175
6,000 (2722)	7.9 (2.4)	230
8,000 (3629)	6.5 (2)	280
10,000 (4536)	5.8 (1.8)	355
12,000 (5443)	4.4 (1.3)	400

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs. (kgs)	Total Rope on Drum ft. /m
1	12,000 (5443)	17 (5.2)
2	9,210 (4178)	41 (12.5)
3	8,030 (3642)	71 (21.6)
4	6,894 (3127)	90 (27.4)

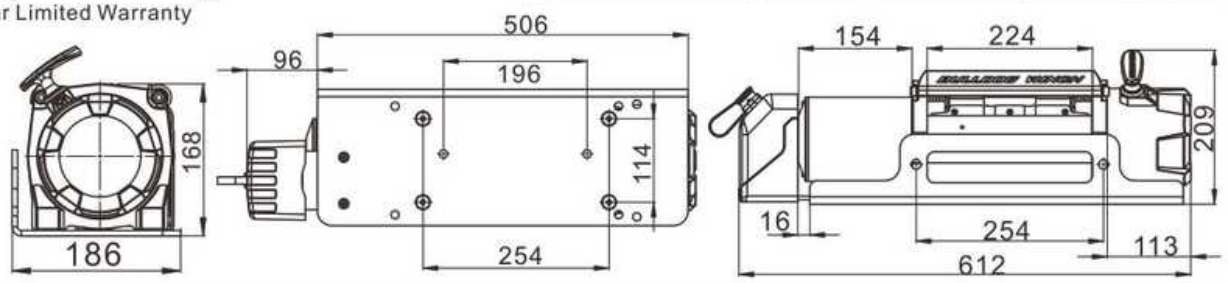

KIT INCLUDES :



20110
For 10039



Synthetic Rope
For 10040



20292
2-in-1 Controller: Wired controller with 20ft lead also can be switched to wireless mode with lead unplugged



20204



20291
Mounting Plate For Deck Mounting And Spring Steel Tensioner



20234
Rope Tension For Easy Spooling And Un-spooling

••• VERSATILE MOUNTING - CLOCKABLE GEAR BOX - REMOTE MOUNTABLE POWER UNIT

PART #10061



- POWER LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- LOW PROFILE
- HEAVY DUTY TRUCK WINCH CHASSIS & GEAR BOX
- NARROW DRUM AND ROPE TENSION FOR EASY ROPE HANDLING

PART #10062



SPECIFICATIONS:

Rated Line Pull: 9,800lbs (5443kgs)
Motor: 12V DC 5.8hp(4.2kW) Series Wound
Control: Remote hand held with 20'(6.1m) lead
Gear Train: 3 stage planetary
Gear Ratio: 265:1
Clutch: Freespool
Brake: Automatic load hold
Drum Dia x L: 2.5"x 2.7"(63.5mm x 70mm)
Battery Leads: 6ft (1.83m)
Overall Dimensions(L x W x H): 21.5" x 7.32" x 7.79"
(545 x 186 x 198mm)
Winch Mounting Bolt Pattern:4.5"x 6.57" (114 x 167mm)
Plate Mounting Bolt Pattern: 14.52" x 5.8"(369 x 148mm)

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 10061

- **Wire Rope Dia x L:** 9/25" x 50'(9.1mm x 15m)
- **Fairlead:** Roller
- **Weight:** 77.8lbs / 35.4kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 10062

- **Synthetic Rope:** 9mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 64.2lbs / 29.1kgs


2 Year Limited Warranty

PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	29(8.9)	51
4070(1850)	11(3.38)	186
6094(2770)	8.85(2.7)	240
8000(3636)	7.08(2.16)	295
9800(4445)	5.7(1.74)	365

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	9800(4445)	7.87(2.4)
2	7860(3560)	17.7(5.4)
3	6560(2975)	29.5(9)
4	5630(2554)	43.3(13.2)
5	4930(2236)	49.2(15)

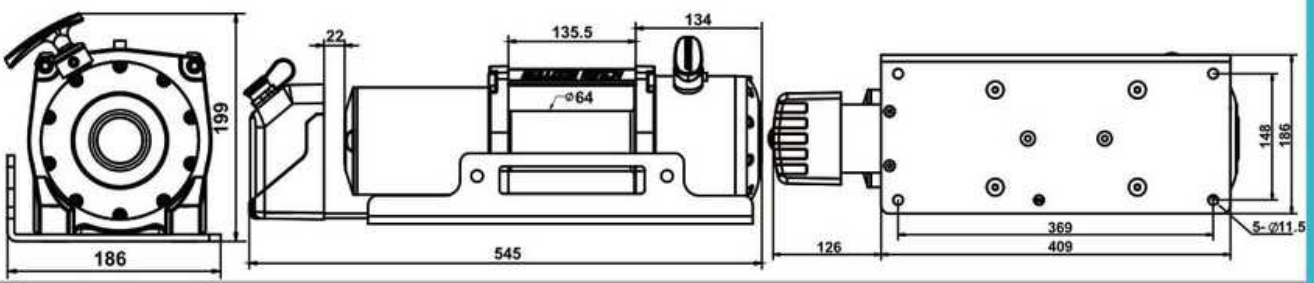

KIT INCLUDES :



Wire Rope
For 10061



Synthetic Rope
For 10062



20389
Mounting plate for deck mounting and spring steel tensioner



20204



20216

OPTIONAL ACCESSORIES:



20408
20408-3

••• VERSATILE MOUNTING - CLOCKABLE GEAR BOX
- REMOTE MOUNTABLE POWER UNIT

PART #10031



- POWER LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- LOW PROFILE
- HEAVY DUTY TRUCK WINCH CHASSIS & GEAR BOX
- NARROW DRUM AND ROPE TENSION FOR EASY ROPE HANDLING

PART #10032



SPECIFICATIONS:

Rated Line Pull: 7, 800lbs (3538kgs)
Motor: 12V DC 5. 2hp(3. 8kW) Series Wound
Control: Remote hand held with 20'(6.1m) lead
Gear Train: 3 stage planetary
Gear Ratio: 218:1
Clutch: Freespool
Brake: Automatic load hold
Drum Dia x L: 2.5"x 2. 7"(63.5mm x 70mm)
Battery Leads: 6ft (1.83m)
Overall Dimensions(L x W x H): 18. 93"x 7. 32"x 6. 61" (481 x 186 x 168mm)
Winch Mounting Bolt Pattern:4. 5" x 4.0" (114 x 102. 5mm)
Plate Mounting Bolt Pattern: 12"x5. 8" (305 x 148mm)

PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	31(9.4)	80
2000(907)	10(3.1)	140
4000(1814)	7(2.2)	200
6000(2722)	5(1.6)	270
7800(3538)	4(1.2)	330

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	7800(3538)	(5.9)1.8
2	6540(2966)	(13.1)4
3	5500(2495)	(21.6)6.6
4	4750(2155)	(31.5)9.6
5	4120(1869)	(42.6)13
6	3730(1692)	(47.5)14.5


WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 10031

- **Wire Rope Dia x L:** 5/16" x 44'(8.1mm x14.5m)
- **Fairlead:** Roller
- **Weight:** 61lbs / 27.8kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 10032

- **Synthetic Rope:** 8mm x 50ft(8mm x 15m)
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 60.1lbs / 27.3kgs

2 Year Limited Warranty

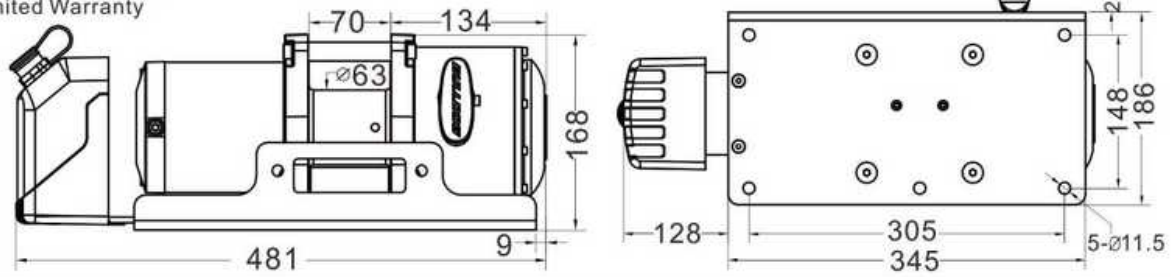

KIT INCLUDES :



20214
For 10031



20226
For 10032



20216



20204



20215
Mounting Plate For Deck Mounting And Spring Steel Tensioner

OPTIONAL ACCESSORIES:



20408
20408-3

••• VERSATILE MOUNTING - CLOCKABLE GEAR BOX
- REMOTE MOUNTABLE POWER UNIT

PART #10029



- POWER LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- LOW PROFILE
- HEAVY DUTY TRUCK WINCH CHASSIS & GEAR BOX
- NARROW DRUM AND ROPE TENSION FOR EASY ROPE HANDLING

PART #10030



SPECIFICATIONS:

Rated Line Pull: 5,800lbs (2631kgs)
Motor: 12V DC 1.87hp(1.4kW) Series Wound
Control: Remote hand held with 20'(6.1m) lead
Gear Train: 3 stage planetary
Gear Ratio: 218:1
Clutch: Freespool
Brake: Automatic load hold
Drum Dia x L: 2.5"x 2.7"(63.5mm x 70mm)
Battery Leads: 6ft (1.83m)
Overall Dimensions(L x W x H): 17.9" x 7.32" x 6.61" (455 x 186 x 168mm)
Winch Mounting Bolt Pattern:4.5"x 4.0" (114 x 102.5mm)
Plate Mounting Bolt Pattern: 12" x 5.8"(305 x 148mm)

PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	10(3)	15
2000(907)	7.5(2.3)	120
4000(1814)	4.9(1.5)	210
5800(2631)	2.9(0.9)	310

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	5800(2631)	(5.9)1.8
2	4990(2263)	(13.1)4
3	4280(1941)	(21)6.4
4	3730(1692)	(29.8)9.1
5	3310(1501)	(40)12.2
6	2961(1343)	(52.5)16
7	2659(1206)	(55)16.8


WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 10029

- **Wire Rope Dia x L:** 9/32" x 55' (7.2mm x 16.8m)
- **Fairlead:** Roller
- **Weight:** N.W.57lbs / 26kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 10030

- **Synthetic Rope:** 7mm x 55ft(7mm x 16.8m)
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** N.W.53.8lbs(24.5kgs)

2 Year Limited Warranty

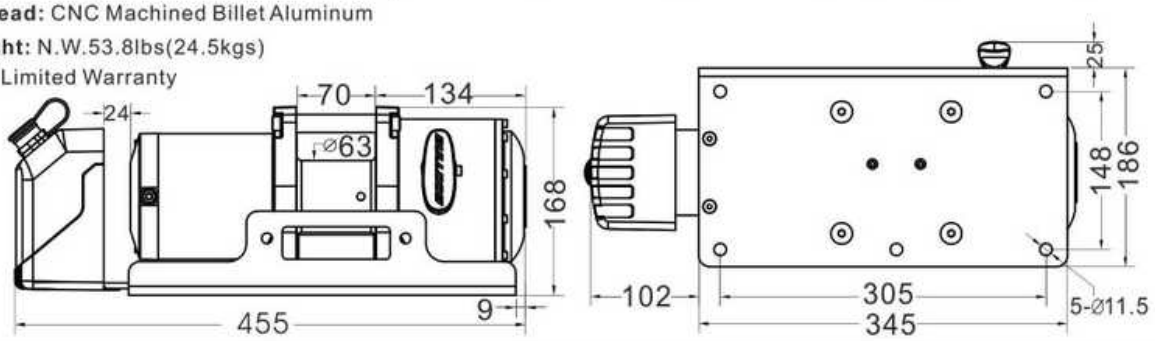

KIT INCLUDES :



20213
For 10061



Synthetic Rope
For 10062



20215
Mounting plate for deck mounting and spring steel tensioner



20204



20216

OPTIONAL ACCESSORIES:



20408
20408-3

••• VERSATILE MOUNTING - CLOCKABLE GEAR BOX - REMOTE MOUNTABLE POWER UNIT

PART #15019



- POWER LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- ALL-IN-ONE SET-UP INCLUDES MOUNTING PLATE AND POWER UNIT MOUNTED TO MOTOR
- INCLUDES WIRE ROPE TENSION FOR EASIER ROPE MANAGEMENT

PART #15020



SPECIFICATIONS:

Rated Line Pull: 4,400lbs (1995kgs)
Motor: 12V DC 3.25hp Permanent Magnet
Control: Remote hand held with 20'(6.1m) lead
Gear Train: 3 stage planetary
Gear Ratio: 180:1
Clutch: Freespool
Brake: Automatic load hold
Drum Dia x L: 2"x 3.15"(51mm x 80mm)
Battery Leads: 6ft (1.83m)
Overall Dimensions(L x W x H): 15.66"x 4.44"x 6.29" (398x113x160mm)
Winch Mounting Bolt Pattern:6.61" x 3.0" (168x76mm)
Plate Mounting Bolt Pattern: 3.15"x4.13" (80 x 105mm)

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 15019

- **Wire Rope Dia x L:** 7/32"x55.7(5.4mmx17m)
- **Fairlead:** Roller
- **Weight:** N.W.28.8lbs(13.1kgs)

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 15020

- **Synthetic Rope:** 6mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** N.W.24lbs(10.9kgs)


2 Year Limited Warranty


PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed ft/min(m/min)	Current A
0	12.1(3.7)	26
1000 (454)	8.8(2.7)	50
2000 (908)	7.8(2.4)	90
3000(1362)	6.5(2.0)	150
3400(1544)	5.9(1.8)	185

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	3400(1544)	7.6(2.3)
2	2829(1284)	16.6(5.0)
3	2422(1099)	27.2(8.3)
4	2117(961)	39.7(12.1)
5	1880 (854)	45(13.7)

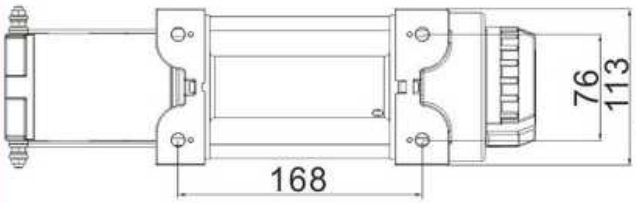

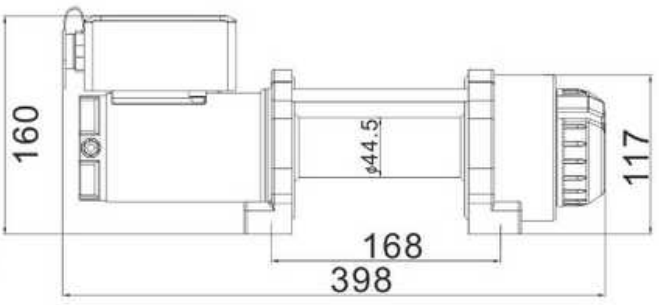

KIT INCLUDES :



20223
For 15019



20095
For 15020



20220



Countersunk mounting bolts for easy trailer deck mounting

OPTIONAL ACCESSORIES:



Tension plate for easier wire rope management



20408
20408-3

PART #15017



- POWER LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- ALL-IN-ONE SET-UP INCLUDES MOUNTING PLATE AND POWER UNIT MOUNTED TO MOTOR
- INCLUDES WIRE ROPE TENSION FOR EASIER ROPE MANAGEMENT

PART #15018



SPECIFICATIONS:

Rated Line Pull: 3,400lbs (1542kgs)
Motor: 12V DC 2.86hp Permanent Magnet
Control: Remote hand held with 20'(6.1m) lead
Gear Train: 3 stage planetary
Gear Ratio: 180:1
Clutch: Freespool
Brake: Automatic load hold
Drum Dia x L: 1.73"x2.76"(44.5mm x 70mm)
Battery Leads: 6ft (1.83m)
Overall Dimensions(L x W x H): 13.5" x 4.44" x 6.29" (346 x 113 x 160mm)
Winch Mounting Bolt Pattern:4.8"x 3.0" (124 x 76mm)
Plate Mounting Bolt Pattern: 1.96" x 3.74"(50 x 95mm)

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 15017

- **Wire Rope Dia x L:** 3/16" x 45' (5. 0mm x 13. 7m)
- **Fairlead:** Roller
- **Weight:** N.W.22.8lbs / 10.4 kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 15018

- **Synthetic Rope:** 4.8mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** N.W.20. 8lbs(9. 45kgs)


2 Year Limited Warranty

PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed ft/min(m/min)	Current A
0	13.1(4.0)	30
1000 (454)	9.1(2.8)	60
2000 (908)	7.8(2.4)	110
3000(1362)	6.2(1.9)	170
4400(1998)	4.3(1.3)	200

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	4400(1998)	11.5(3.5)
2	3617(1642)	25.6(7.8)
3	3071(1394)	42.3(12.9)
4	2668(1211)	55.8(17)

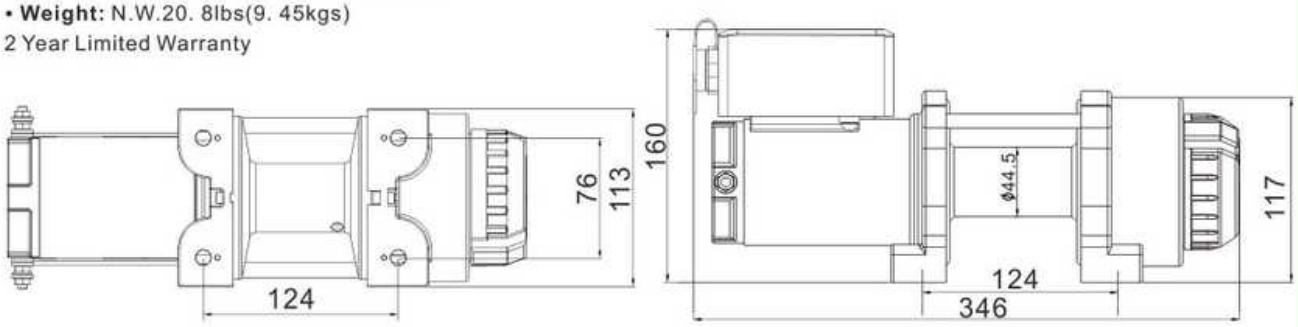

KIT INCLUDES :



20222
For 15017



20185
For 15018



20220



Countersunk mounting bolts for easy trailer deck mounting



Tension plate for easier wire rope management

OPTIONAL ACCESSORIES:



20408
20408-3


PART#15021R2



- 2000LB RATED LINE PULL
- 600LB PLOW LIFT
- POWERS LOAD IN AND OUT
- EASILY MOUNTED TO MOST ATV/UTV/PLOW SET-UPS
- SPECIAL 0.68HP MOTOR DESIGNED TO HANDLE CONSTANT UP & DOWN
- KIT DESIGNED TO MOUNT ON PLOW BRACKET & DISCONNECT EASILY WITH PLOW

SPECIFICATIONS:

Rated Line Pull: 2,000lbs. (9.7kgs)
Rated Plow Lift: 600lbs.(272kgs)
Motor: 12V DC 0.68HP Permanent Magnet
Control: mini-rocker switch with 8ft(2.5m) lead plugs into power unit
Gear Train: Planetary
Gear Ratio: 153:1
Brake: Dynamic
Strap Size: 30"(L)x1.5"(W)x0.1"
Drum Dia. x L: 0.787" X 1.575" (20mm x 40mm)
Battery Leads: 10ga X 6' (1.8m)
Overall Dimensions(LxWxH):
10.4" x 4.33 x 4.72"(264 x 110 x 120mm)
Mounting Bolt Pattern: 3.15"(80mm) on center
Net Weight: 16.5lbs (7.5kgs)
2 Year Limited Warranty

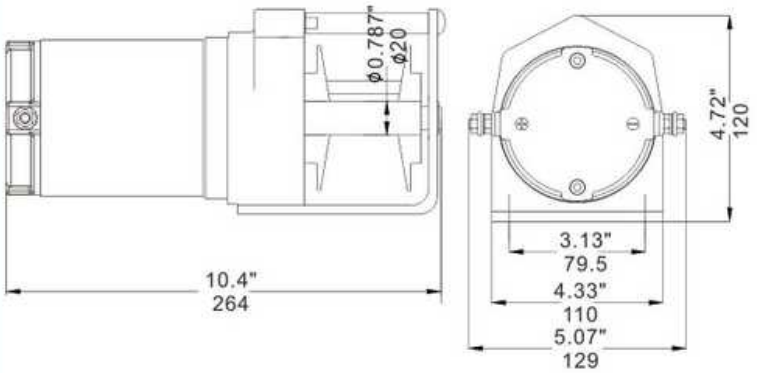

KIT INCLUDES :



20225



Premium 200Amp Contactor is more durable/longer lasting than relays



Mini Rocker Switch with 8ft lead and plug



Includes quick connect for quick power disconnect when disconnecting plow

OPTIONAL ACCESSORIES:



Power Unit



Power Unit Mounting Plate & Hardware



20408
20408-8

PART#15008



- **POWERS LOAD IN AND OUT**
- **DYNAMIC BRAKE**
- **1.0HP PERMANENT MAGNET MOTOR FOR MAXIMUM PERFORMANCE**

SPECIFICATIONS:


Rated Line Pull: 2,000lbs. (907kgs)
Motor: 12V DC 1.0HP Permanent Magnet
Control: Hand Control with
6ft lead to battery
4ft lead to motor
Gear Train: Planetary
Gear Ratio: 253:1
Brake: Dynamic
Wire Rope Dia x L: 5/32" x 50'
(4mm x 15.2m)
Drum Dia. x L: 1.25" X 2.83"
(31.75mm X72mm)
Overall Dimensions(LxWxH):
11.2"x4.1"x4.1"
(284.5x104x104mm)
Mounting Bolt Pattern:
3.15" (80mm) on center of drum
Weight: 12.56lbs / 5.7kgs
2 Year Limited Warranty

PULL, SPEED, AMPS

Line Pull (lbs./kg)	Line Speed ft/min(m/min)	Current A
0	10.5(3.2)	8
500(227)	9.2(2.8)	30
1000(454)	7.2(2.2)	60
1500(680)	5.2(1.6)	90
2000(907)	2.9(0.9)	120

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	2000(907)	6.6(2.0)
2	1630(740)	14(4.3)
3	1380(620)	23.5(7.2)
4	1190(540)	35(10.6)
5	1050(470)	47(14.4)
6	940(420)	50(15.2)

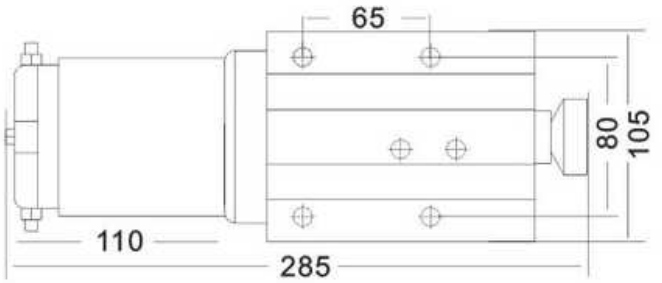

KIT INCLUDES :



20102
Wire Rope



20173
Hand Control

OPTIONAL ACCESSORIES:



20099R2

PART #15022



- POWERS LOAD IN AND OUT
- AUTOMATIC LOAD HOLDING BRAKE
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT

PART #15023



SPECIFICATIONS:

Rated Line Pull: 6,000lbs. (2,722kgs)
Motor: 12V DC 1.9HP Permanent Magnet
Control: Remote Hand Held
Gear Train: High Efficiency 3-stage Planetary Gear Set
Gear Ratio: 226:1
Clutch: Freespooling
Brake: Mechanical Automatic
Drum Dia. x L: 2" X 4.7" (51mm X 119mm)
Battery Leads: 6ga X 5.8' (1.76m)
Overall Dimensions(LxWxH):
14.6"x4.6"x4.9"(372x118x124mm)
Mounting Bolt Pattern: 6.6"x3.0"(168 X 76mm)

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 15022

- **Wire Rope Dia x L:** 1/4" x 55' (6.4mm x 16.8m)
- **Fairlead:** Roller
- **Weight:** 41lbs / 18.6kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 15023

- **Synthetic Rope:** 6mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 24.8lbs / 11.3kgs


2 Year Limited Warranty

PULL, SPEED, AMPS

Line Pull Lbs.(kg)	Line Speed FPM(MPM)	Motor Amp Draw
0	18(5.5)	29
1,000(454)	15(4.6)	59
3,000(1,361)	10(3.1)	116
4,000(1,814)	8(2.4)	155
5,000(2,268)	5(1.5)	211
6,000(2,722)	3.5(1.1)	277

LINE PULL AND ROPE CAPACITY IN LAYER

Line Pull	Rated Line Pull lbs.(kgs)	Total Rope on Drum fr. /m
1	6000(2727)	11.15(3.4)
2	4878(2217)	22.47(6.85)
3	4279(1945)	36.64(11.17)
4	3396(1543)	55.1(16.8)

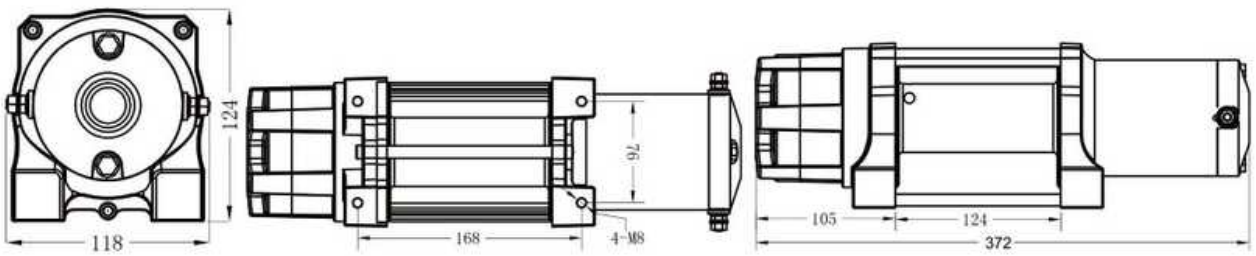

KIT INCLUDES :



20250
For 15022



20095
For 15023



20113



Remote Mount-plug and Hand Held switch

OPTIONAL ACCESSORIES:



20408
20408-1

PART #15004



- POWERS LOAD IN AND OUT
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- AUTOMATIC LOAD HOLDING BRAKE
- 1.6HP PERMANENT MAGNET MOTOR FOR MAXIMUM PERFORMANCE

PART #15012



SPECIFICATIONS:

Rated Line Pull: 4,000lbs. (1,814kgs)
Motor: 12V DC 1.6HP Permanent Magnet
Control: 1) Handlebar mounted mini rocker switch
2) Hand held remote
Gear Train: High Efficiency 3-stage Planetary Gear Set
Gear Ratio: 166:1
Clutch: Freespooling
Brake: Automatic load hold, Mechanical In-Drum
Drum Dia. x L: 2" X 4.8" (51mm X 122mm)
Battery Leads: 7ga X6 ' (1.8m)
Overall Dimensions(LxWxH):
14.53"x4.6"x4.74"(369x117x124mm)
Mounting Bolt Pattern: 6.6"x3.0"(168 X 76mm)

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 15004

- **Wire Rope Dia x L:** 7/32" x 55' (5.5mm x 16.8m)
- **Fairlead:** Roller
- **Weight:** 31.1lbs / 14.13kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 15012

- **Synthetic Rope:** 6mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 24.8lbs / 11.3kgs


2 Year Limited Warranty


PULL, SPEED, AMPS

Line Pull(lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	21.11(7.35)	26
1000(454)	13.5(4.12)	98
2000(907)	10.5(3.2)	135
3000(1360)	8.5(2.6)	168
4000(1814)	5.2(1.6)	235

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	4000(1814)	13.1(4)
2	3520(1597)	28.8(8.6)
3	3098(1405)	45.9(14)
4	2726(1236)	55(16.8)

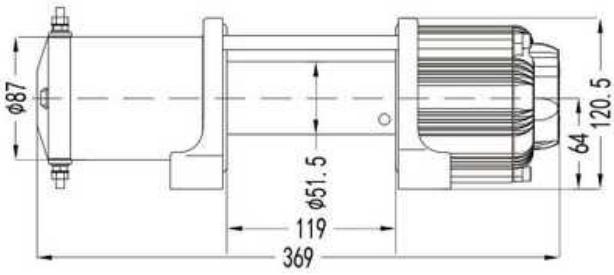

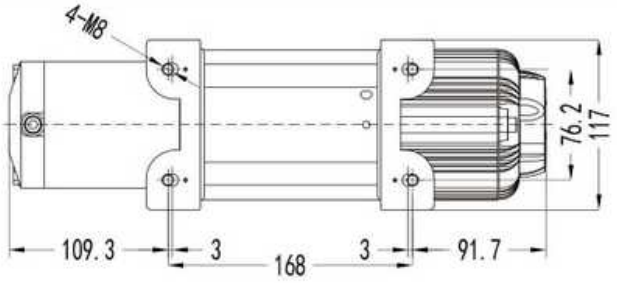

KIT INCLUDES :



20104
For 15004



20095
For 15012



20151
Handlebar mounted mini rocker switch



Hand Held Switch



20113

OPTIONAL ACCESSORIES:



20408
20408-1

PART #15005



- POWERS LOAD IN AND OUT
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- AUTOMATIC LOAD HOLDING BRAKE
- 1.6HP PERMANENT MAGNET MOTOR FOR MAXIMUM PERFORMANCE

PART #15013



SPECIFICATIONS:

Rated Line Pull: 3,500lbs. (1,587kgs)
Motor: 12V DC 1.6HP Permanent Magnet
Control: 1) Handlebar mounted mini rocker switch
2) Hand held remote
Gear Train: 3 stage Planetary
Gear Ratio: 166:1
Clutch: Freespooling
Brake: Automatic load hold, Mechanical In-drum
Drum Dia. x L: 2" X 2.9" (51mm X 73.7mm)
Battery Leads: 7ga X 6' (1.8m)
Overall Dimensions(LxWxH):
12.91"x4.6"x4.74"(328x117x120.5mm)
Mounting Bolt Pattern: 4.9"x3.0"(124 x 76mm)

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 15005

- **Wire Rope Dia x L:** 7/32" x 50' (5.5mm x 15.2m)
- **Fairlead:** Roller
- **Weight:** 29lbs / 13.17kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 15013

- **Synthetic Rope:** 4.8mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 22.2lbs / 10.1kgs


2 Year Limited Warranty

PULL, SPEED, AMPS

Line Pull (lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	24.1(7.35)	25
875(397)	13.2(4.03)	96
1750(794)	11.5(3.5)	138
2625(1190)	8(2.43)	176
3500(1588)	6.2(1.9)	215

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	3500(1588)	7.77(2.36)
2	2991(1357)	17.64(5.38)
3	2610(1184)	27.95(8.52)
4	2330(1057)	40.5(12.5)

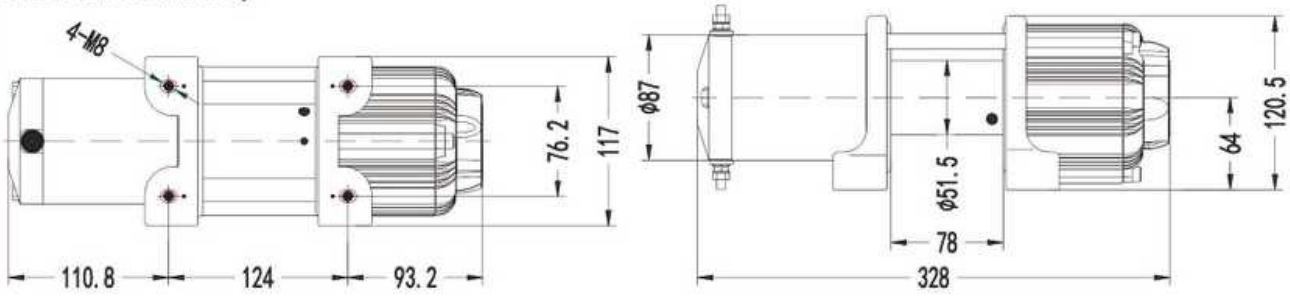

KIT INCLUDES :



20105
For 15005



20185
For 15013



20151
Handlebar Mounted
Mini Rocker Switch



Hand Held Switch

OPTIONAL ACCESSORIES:



20113



Mounting Plate



20408
20408-1

PART #15006



- POWERS LOAD IN AND OUT
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- AUTOMATIC LOAD HOLDING BRAKE
- 1.0HP PERMANENT MAGNET MOTOR FOR MAXIMUM PERFORMANCE

PART #15014



SPECIFICATIONS:

Rated Line Pull: 2,500lbs. (1,134kgs)
Motor: 12V DC 1.0HP Permanent Magnet
Control: Handlebar mounted mini rocker switch
Gear Train: 3 stage planetary
Gear Ratio: 166:1
Clutch: Freespooling
Brake: Automatic load hold, Mechanical In-Drum
Drum Dia. x L: 2" X 2.9" (51mm x 73mm)
Battery Leads: 7ga x6 ' (1.8m)
Overall Dimensions(LxWxH):
13.2"x4.33"x4.49"(335.5x110x114mm)
Mounting Bolt Pattern: 4.9" x 3.0"(124x76mm)

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 15006

- **Wire Rope Dia x L:** 3/16" x 50' (4.8mm x 15.2m)
- **Fairlead:** Roller
- **Weight:** 23.3lbs / 10.6kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 15014

- **Synthetic Rope:** 4.8mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 16.9lbs / 7.7kgs


2 Year Limited Warranty

PULL, SPEED, AMPS

Line Pull (lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	22.57(6.88)	22
500(227)	15.41(4.7)	56
1000(454)	13.28(4.05)	79
1500(680)	11.8(3.6)	136
2000(907)	9.77(2.98)	166
2500(1134)	6.06(1.85)	215

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	2500(1134)	8.2(2.5)
2	2200(988)	17.4(5.3)
3	1930(875)	27.2(8.3)
4	1700(771)	37.7(11.5)
5	1480(673)	50.0(15.2)

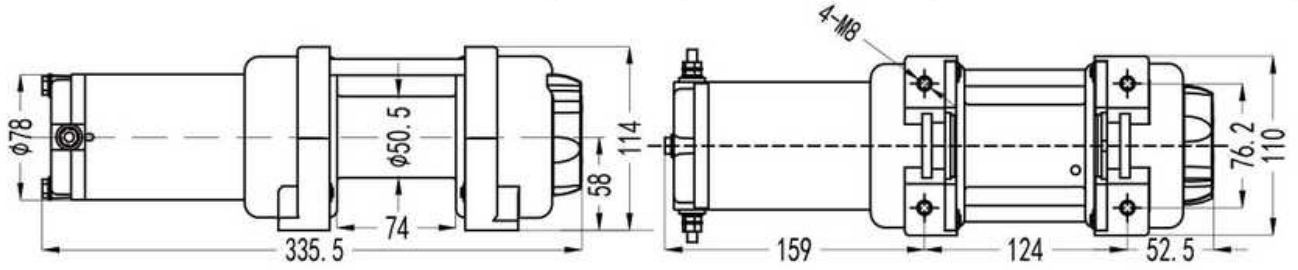

KIT INCLUDES :



20106
For 15006



20185
For 15014



20151
Handlebar mounted mini rocker switch



Mounting Plate



20113

OPTIONAL ACCESSORIES:



20408
20408-1

PART #15002



- POWERS LOAD IN AND OUT
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- DYNAMIC BRAKE
- 1.2HP PERMANENT MAGNET MOTOR FOR MAXIMUM PERFORMANCE

PART #15011



SPECIFICATIONS:

Rated Line Pull: 3,000lbs. (1,361kgs)
Motor: 12V DC 1.2HP Permanent Magnet
Control: Handlebar mounted mini rocker switch
Gear Train: 3 stage Planetary
Gear Ratio: 153:1
Clutch: Freespooling
Brake: Dynamic load hold
Drum Dia. x L: 1.25" X 2.83" (31.7mm X 72mm)
Battery Leads: 10ga X 6' (1.8m)
Overall Dimensions(LxWxH):
11.73"x3.94"x4.17"(298x100x106mm)
Mounting Bolt Pattern: 3.15"(80mm) on center

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 15002

- **Wire Rope Dia x L:** 3/16" x 40' (4.8mm x 12.2m)
- **Fairlead:** Roller
- **Weight:** 19.2lbs / 8.74kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 15011

- **Synthetic Rope:** 4.8mm x 40ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 16.2lbs / 7.4kgs


2 Year Limited Warranty


PULL, SPEED, AMPS

Line Pull (lbs./kg)	Line Speed fpm ft/min(m/min)	Current A
0	13.61ft(4.15m)	11
500(227)	10.2ft(3.1m)	32
1000(454)	8.43ft(2.57m)	62
1500(680)	6.7ft(2.05m)	79
2000(907)	3.96ft(1.21m)	98
2500(1134)	3.1ft(0.96m)	121
3000(1361)	2.72ft(0.83m)	131

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	3000(1361)	4.9(1.5)
2	2320(1052)	11.5(3.5)
3	1890(858)	19.3(5.9)
4	1590(720)	28.5(8.7)
5	1380(620)	30.0(9.2)

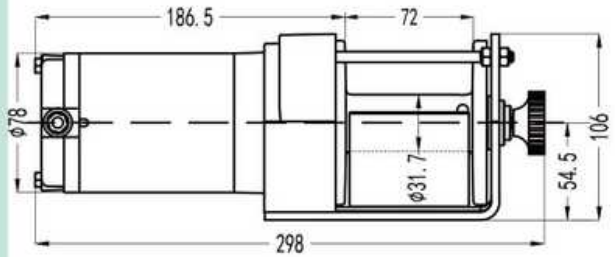

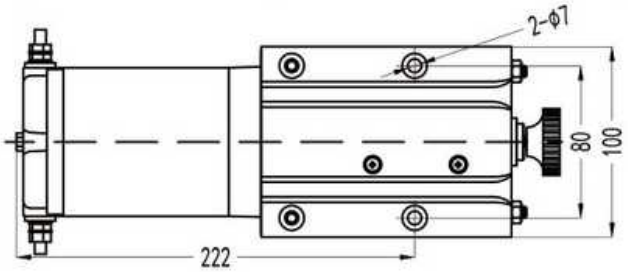

KIT INCLUDES :



20103
For 15002



Synthetic Rope
For 15011



20151
Handlebar Mounted
Mini Rocker Switch



Mounting Plate

OPTIONAL ACCESSORIES:



20115
Power Unit



20101



20099R2

PART #15001



- POWERS LOAD IN AND OUT
- FREESPOOLING CLUTCH FOR QUICK WIRE ROPE DEPLOYMENT
- DYNAMIC BRAKE
- 1.0HP PERMANENT MAGNET MOTOR FOR MAXIMUM PERFORMANCE

PART #15010



SPECIFICATIONS:

Rated Line Pull: 2,000lbs. (907kgs)
Motor: 12V DC 1.0HP Permanent Magnet
Control: Handlebar mounted mini rocker switch
Gear Train: 3 stage planetary
Gear Ratio: 153:1
Clutch: Freespooling
Brake: Dynamic load hold
Drum Dia. x L: 1.25" X 2.83" (37.1mm x 72mm)
Battery Leads: 10ga x6 ' (1.8m)
Overall Dimensions(LxWxH):
11.2"x3.94"x4.17"(285x100x106mm)
Mounting Bolt Pattern: 3.15"(80mm) on center

WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 15001

- **Wire Rope Dia x L:** 3/16" x 50' (4.8mm x 15.2m)
- **Fairlead:** Roller
- **Weight:** 23.3lbs / 10.6kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 15010

- **Synthetic Rope:** 4.8mm x 40ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 16.9lbs / 7.7kgs


2 Year Limited Warranty

PULL, SPEED, AMPS

Line Pull (lbs./kg)	Line Speed ft/min(m/min)	Current A
0	13.5ft(4.1m)	12
500(227)	10.8ft(3.28m)	33
1000(454)	8.5ft(2.6m)	60
1500(680)	7.2ft(2.2m)	85
2000(907)	3.7ft(1.12m)	110

LINE PULL AND ROPE CAPACITY IN LAYER

Layer	Rated Line Pull lbs.(kgs)	Total Rope on Drum ft./m
1	2000(907)	6.5(2.0)
2	1630(740)	14(4.3)
3	1380(620)	23.5(7.2)
4	1190(540)	35(10.6)
5	1050(470)	47(14.4)
6	940(420)	50(15.2)

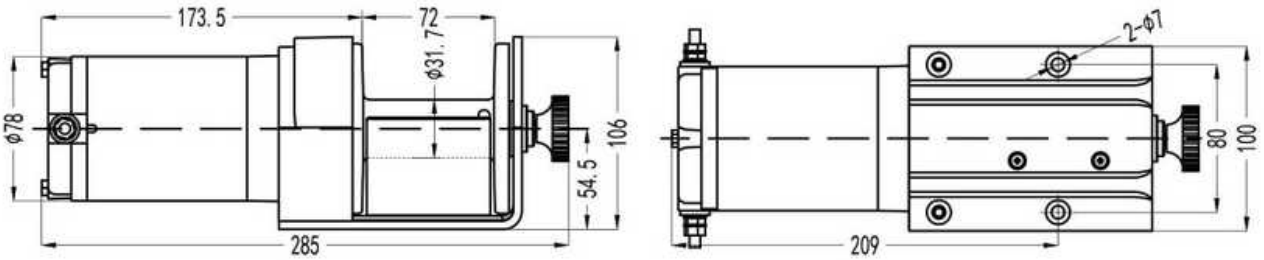

KIT INCLUDES :



20102
For 15006



Synthetic Rope
For 15010



20151
Handlebar Mounted
Mini Rocker Switch



Mounting Plate

OPTIONAL ACCESSORIES:



20115
Power Unit



20101



20099R2

PART #12003



- POWERFUL PERMANENT MAGNET DC MOTOR
- 3-STAGE PLANETARY GEARTRAIN
- POWER LOAD UP AND DOWN
- PLANE CONE BRAKE
- HEAVY DUTY CHASSIS AND GEAR BOX
- INCLUDES 20FT CONTROLLER

PART #12004



SPECIFICATIONS:

Rated Capacity: 800lb (363kgs)
Motor: 12V DC 1.0HP Permanent Magnet
Control: 20ft (6.1m) lead
Gear Ratio: 187:1
Brake: Plane cone brake
Battery Leads: 5.5ft(1.67m)
Drum Dia x L: 2. 3"x 5. 2" (59x131cm)
Overall Dimensions(L x W x H):
15.2" x 4.5" x 7.3" (385x115x186mm)
Mounting Bolt Pattern:
6.6"x3" (167.6x76.2mm)

Performance By Layer							
Drum Layer	Line Load*			No Load Speed		Drum Capacity	
	lbf	kgf	kN	ft/min	m/min	ft	m
1	800	362	3.6	10.8	3.3	17	5.2
2	690	313	3.2	12.5	3.8	36	11.2
3	600	272	2.7	14.4	4.4	50	18

First Layer Performance				
Line Load		Current Draw	Line Speed	
lbf	kgf	Amps	ft/min	m/min
0	0	25	15.0	4.1
300	136	38	14.4	3.8
400	184	43	14.1	3.5
800	362	60	10.8	3.3


WIRE ROPE & ROLLER FAIRLEAD KIT PART # 12003

- **Wire Rope Dia x L:** 3/16" x 50' (4.8mm x 15.2m)
- **Fairlead:** Roller
- **Weight:** 33lbs(15kgs)

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT PART # 12004

- **Synthetic Rope:** 4.8mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 26.4lbs(12kgs)

1 Year Limited Warranty

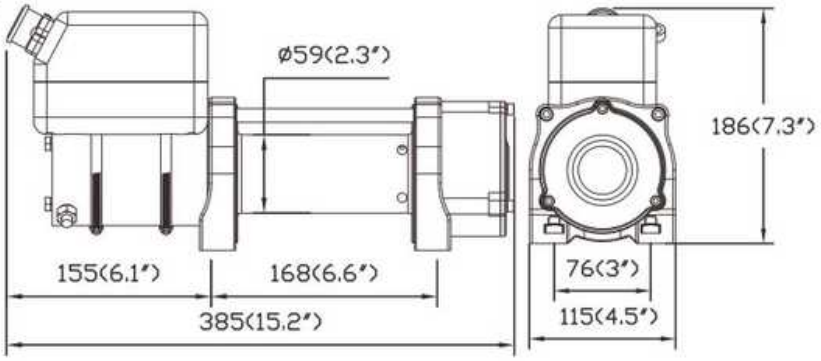

KIT INCLUDES :



20385
For 12003



20185O
For 12004



20382



20384

OPTIONAL ACCESSORIES:



20060



20408
20408-11

PART #12001



- POWERFUL PERMANENT MAGNET DC MOTOR
- 3-STAGE PLANETARY GEARTRAIN
- POWER LOAD UP AND DOWN
- AUTOMATIC LOAD HOLDING BRAKE
- HEAVY DUTY CHASSIS AND GEAR BOX
- INCLUDES 20FT CONTROLLER

PART #12002



SPECIFICATIONS:

Rated Capacity: 1,200lb (544kgs)
Motor: 12V DC 1.6HP (1.2KW) Permanent Magent
Control: 20ft (6.1m) lead
Gear Ratio: 216:1
Brake: Double cone brake
Battery Leads: 5.5ft(1.67m)
Drum Dia x L: 3.9" x 3"(98x76.6mm)
Overall Dimensions(L x W x H):
17.5" x 6.5" x8.2"
(446x165x209mm)
Mounting Bolt Pattern:
4" x 4.5" (101.6 x 114.3mm)

Performance By Layer							
Drum Layer	Line Load*			No Load Speed		Drum Capacity	
	lbf	kgf	kN	ft/min	m/min	ft	m
1	1200	544	5.3	18.7	5.7	10.5	3.2
2	1089	494	4.8	20.3	6.2	22.6	6.9
3	996	426	4.2	22	6.7	36	11
4	917	386	3.8	24.2	7.4	50	15.2

First Layer Performance				
Line Load		Current Draw	Line Speed	
lbf	kgf	Amps	ft/min	m/min
0	0	30	20.0	6.1
300	136	50	19.3	5.9
600	272	70	18.7	5.7
900	408	85	17.7	5.4
1200	544	100	16.7	5.1


WIRE ROPE & ROLLER FAIRLEAD KIT
PART # 12001

- **Wire Rope Dia x L:** 3/16" x 50' (4.8mm x 15.2m)
- **Fairlead:** Roller
- **Weight:** 52.8lbs / 24kgs

SNYTHETIC ROPE & HAWSE FAIRLEAD KIT
PART # 12002

- **Synthetic Rope:** 4.8mm x 50ft
- **Fairlead:** CNC Machined Billet Aluminum
- **Weight:** 49.5lbs / 22.5kgs

1 Year Limited Warranty

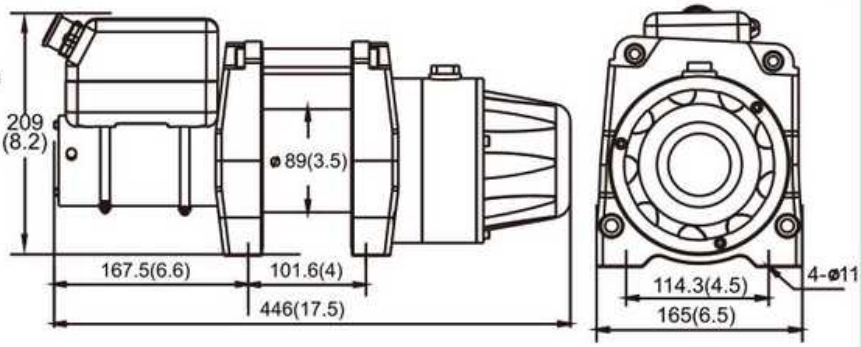

KIT INCLUDES :



20385
For 12001



20185O
For 12002



20382



20384

OPTIONAL ACCESSORIES:



20215



20408
20408-11

>> JL/JT

Part#	Description
20353	2018 to current Jeep JL/JT Factory Steel Bumper Winch Mount

- Winch and fairlead plate to convert OE steel bumper to be winch mountable
- Standard 10x4.5" winch mount
- HD steel




* KIT INCLUDES MATCHING TORX BOLTS

Part#	Description
20366	Matching TORX bolts, a set of 4pcs




RUBICON

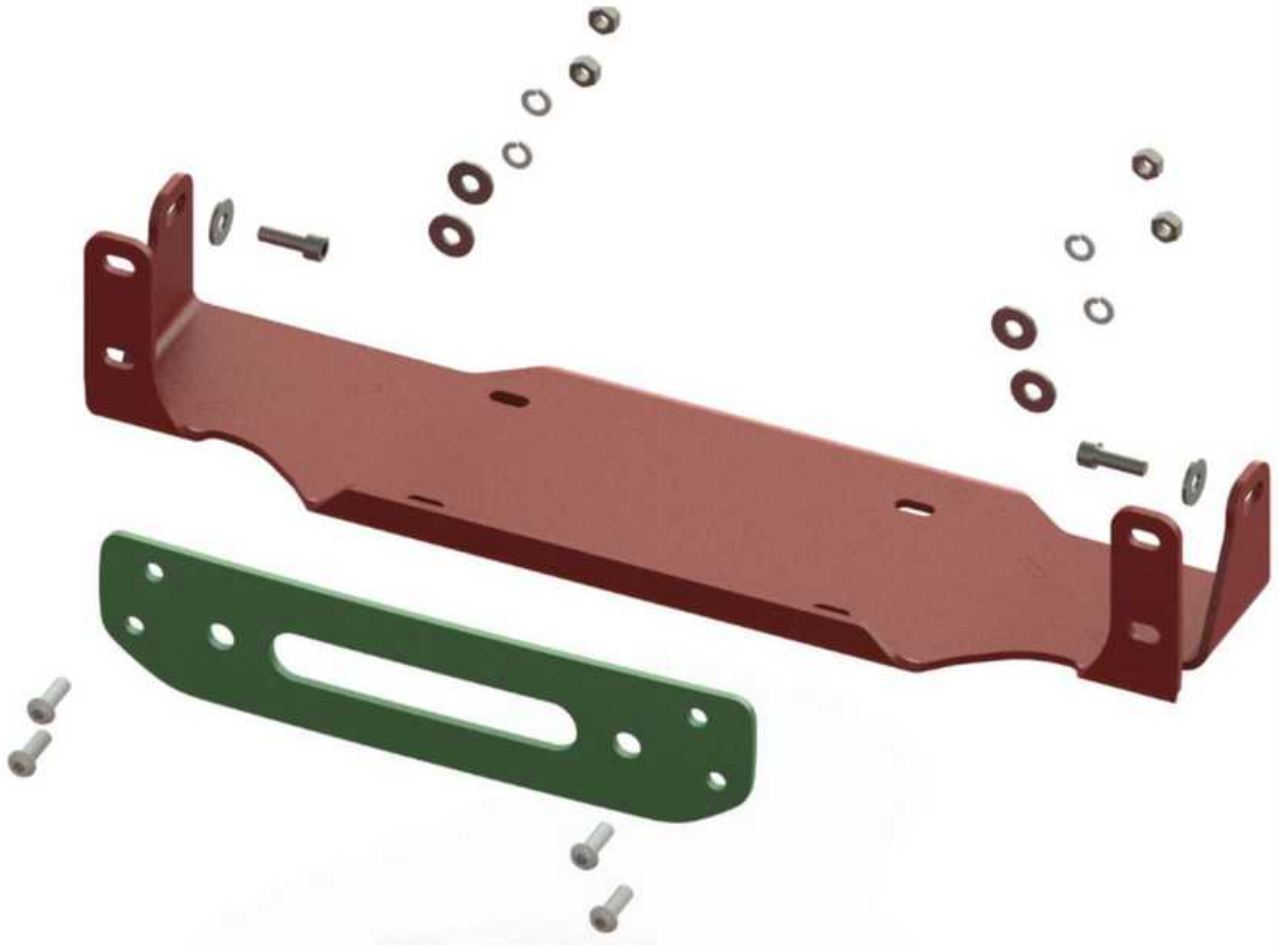

>> JK RECON EDITION
JK HARD ROCK EDITION
JK 75th ANNIVERSARY EDITION
JK RUBICON X EDITION
JK 10th ANNIVERSARY EDITION


Part#	Description
20208	Winch Mount & Fairlead Plates, JK Special Editions.

- 2013 to 2018 JK special editions with steel front bumper- 10th Anniversary, Hard Rock, Rubicon X.
- Steel OE bumper commonly comes with red hooks & bolt ON/OFF end pieces.
- Winch and fairlead plate to convert OE steel bumper to be winch mountable







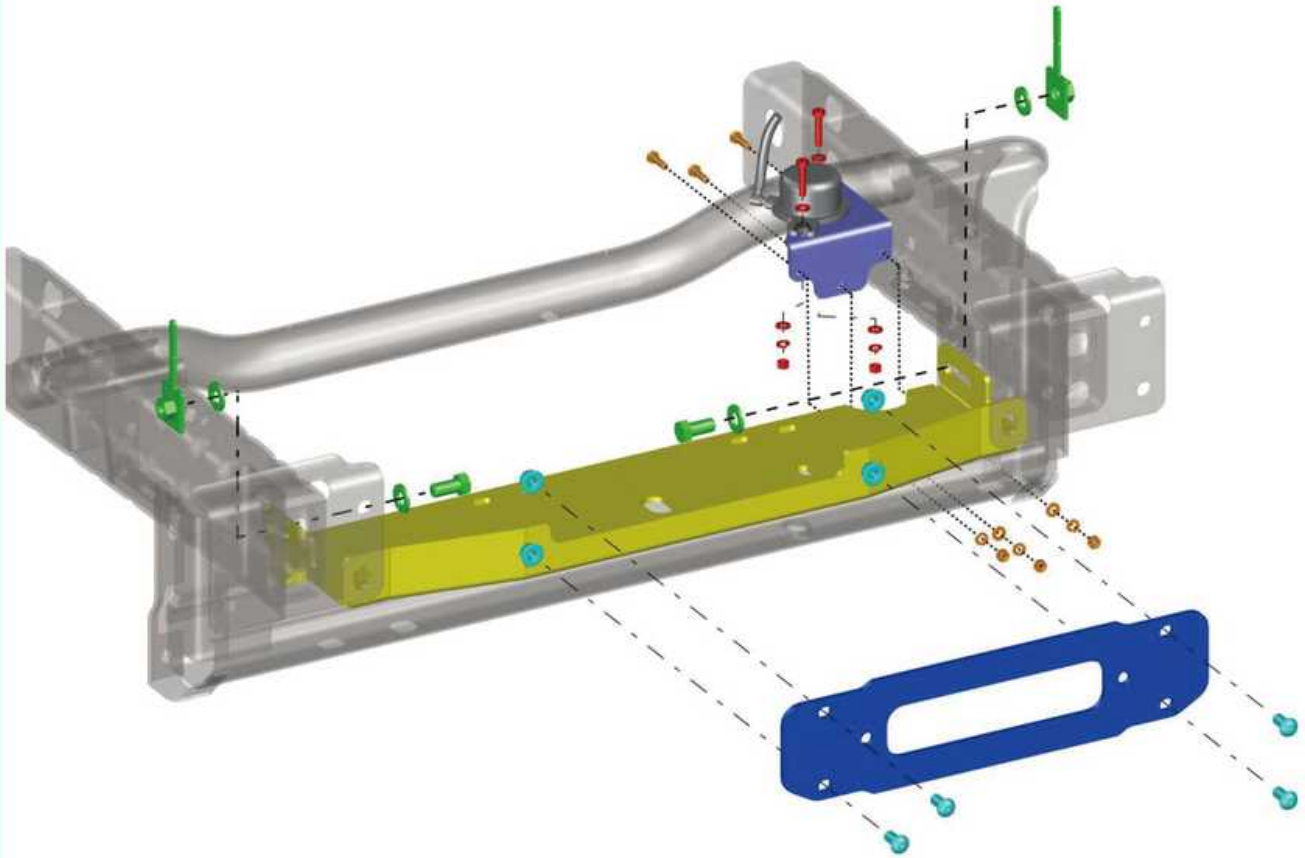

Footnotes:

*Jeep and 10th Anniversary logos are property of Jeep and not affiliated with Bulldog Winch Co LLC


>> JK BACKCOUNTRY EDITION
>> JK CALL OF DUTY MW3 EDITION
>> JK MOAB EDITON

Part#	Description
20209	Winch Mount & Fairlead Plates, JK Moab & Call of Duty Editions

- Jeep JK **Moab** Edition
- Jeep JK **Call of Duty MW3** Edition
- AEV steel front bumper
- Winch and fairlead plate to convert OE steel bumper to be winch mountable





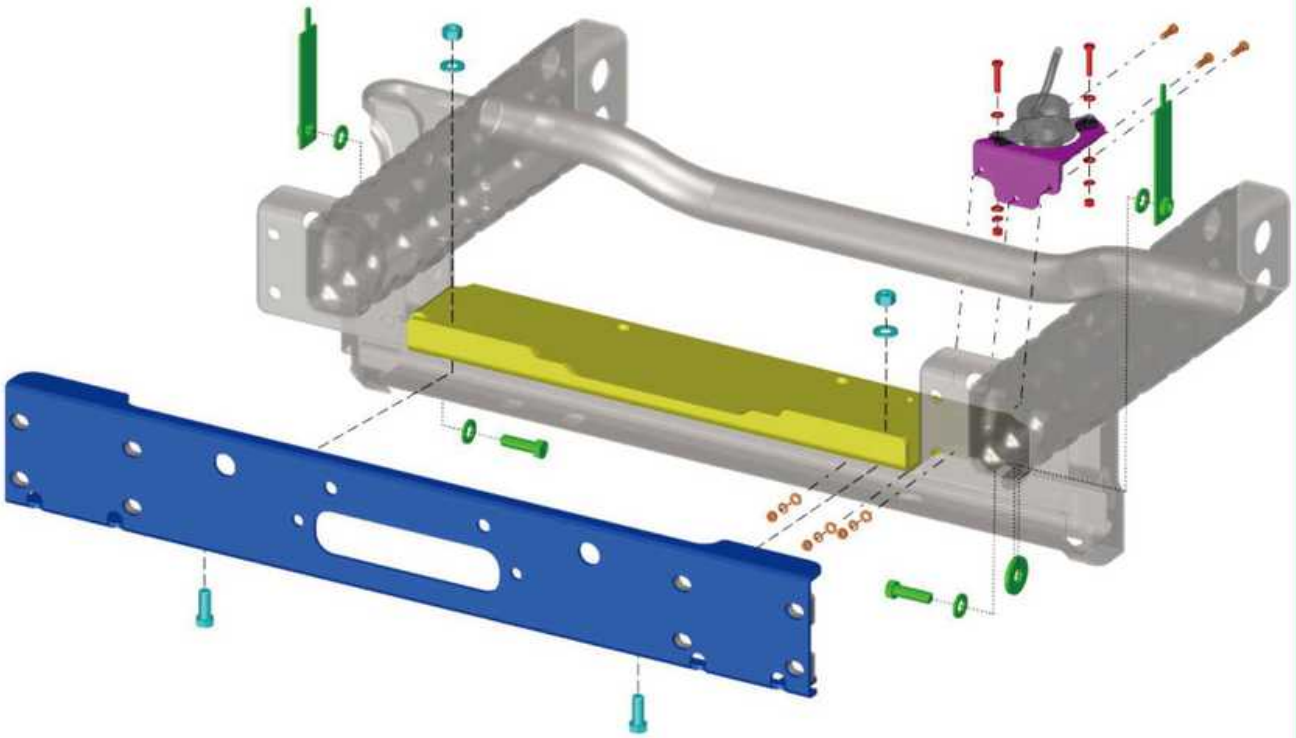

Footnotes:

*Jeep, Moab, Call of Duty MW3, and AEV are not affiliated with Bulldog Winch Co LLC

>> CJ & YJ

YJ 1987-1996 JEEP WRANGLER
CJ 1976-1986 JEEP

Part#	Description
20009	Mounting plate kit for jeep CJ and YJ

- Contains brackets for custom frame mounting to Jeep CJ and YJ.
- Used for 8000 to 12000lb winches with standard 10 x 4.5" bolt pattern.




• 20009



• 20210

Part#	Description
20210	Relocation Bracket - JK Vacuum Cannister

- Relocate vacuum cannister to a more convenient location
- Neeeded when adding aftermarket bumper or winch mount
- For 2011 and later Jeep wranglers

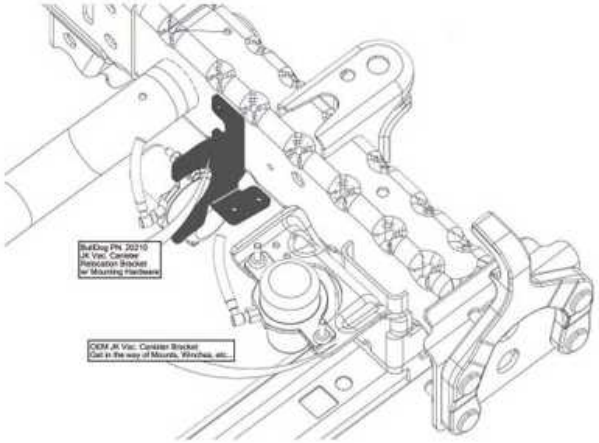

>> TJ

1997 to 2006 JEEP WRANGLER

Part#	Description
20050	Heavy duty mounting plate for jeep TJ

- Custom design mounting plate to fit Jeep TJ.
- Used for 8000 to 12000lb winches with standard 10 x 4.5" bolt pattern.
- Elevated winch mount to clear OE sway bar





• 20050

Part#	Description
20067	TJ Mounting plate with aftermarket disconnecting–sway bar

- Mounts flush to top of frame rails.
- Heavy duty 8mm steel plate.
- Dual position fairlead mount.





• 20067





>> PORTABLE RECEIVER MOUNTS & ACCESSORIES

Part#	Description
20011	2x2" Hitch receiver winch mount

- Provides portable and flexible mounting solution.
- Fully welded frame & handles.
- Fits any standard 2 x 2" receiver.
- Used for truck winches up to 12k with standard 10 x 4.5" bolt pattern.
  Also fits 6.5x4.5 bolt pattern for 6k & 8288 comp winches.
- Includes adapter for 8" fairlead.

NOTE: Capacity is based on capacity of vehicle receiver.



Part#	Description
20155	2x2" Receiver mount-Value

- Value bolt together design.
- Adjustable handle positions.
- Fits any standard 2x2" receiver.
- Used for truck winches with 10x4.5 mounting bolt patten.

NOTE: Capacity is based on capacity of vehicle receiver.








Part#	Description
20154	Storage bracket

- Mounts in bed or out of the way.
- Stores receiver mount & winch when not in use.
- Provides a storage mounting point.
- New stronger gusseted structure allows this to be used as a winching point.

>> UNIVERSAL

Part#	Description
20295	Mounting plate, Alpha and large truck winches

- Extra wide plate for larger footprint winches.

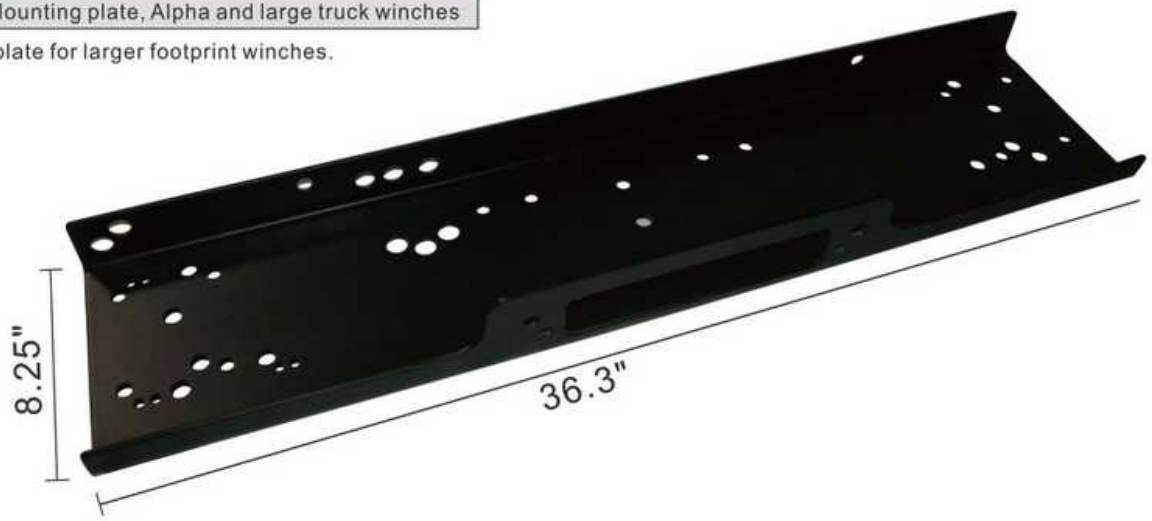

>> UNIVERSAL


Part#	Footprint	Description
20008	36 1/4 x 7 3/8"	Universal mounting plate for 8000 to 12000lb winches with standard 10 x 4.5" bolt pattern
20019	26 x 7 1/2"	Universal mounting plate for 6000lb winches with standard 6.5 x 4.5" bolt pattern

- Provides a mounting surface for the winch and roller fairlead.



Part#	Description
20291	Mounting plate for flat decks

- 10 x 4.5" winch mount with counter sunk heads
- Great for mounting truck winch to flat deck surface
- Use with 20297 countersunk hardware (not included)

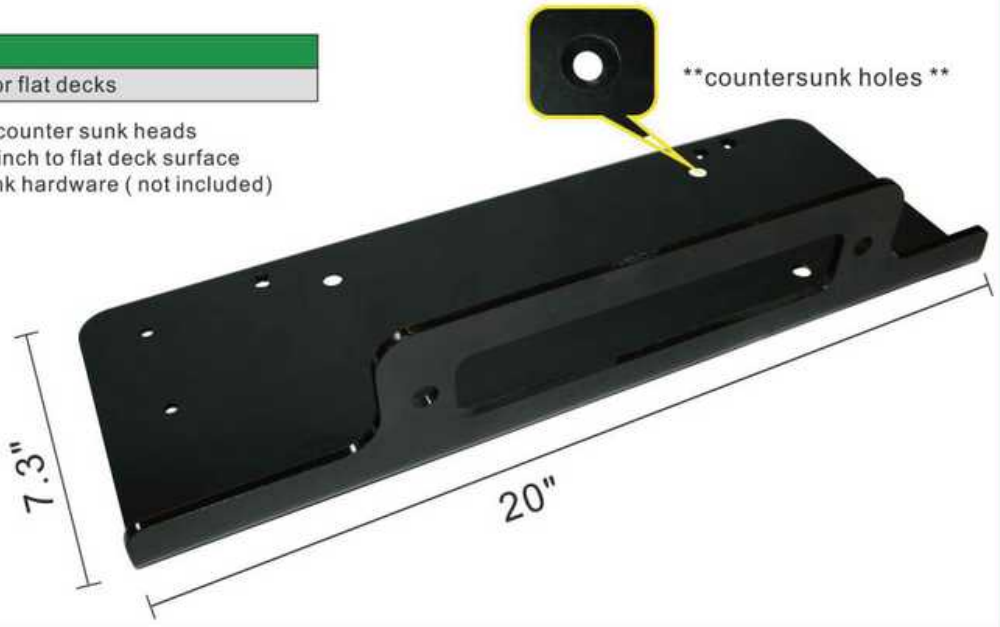

>> ATV WINCH MOUNTS

- CUSTOM FABRICATED STEEL WINCH MOUNTS TO FIT YOUR ATV
- ROLLER FAIRLEAD NOT INCLUDED, FAIRLEAD IS INCLUDED WITH WINCH KIT OR SEPARATELY



15108



15119



15127



15130

ARCTIC CAT	Year	Fits 2k to 3.5k	Notes
1000 4x4 Thundercat	2008-2013	15108	1
700 Altera XT	2016	15108	1
700 XR	2015	15108	1
700 4x4 TRV LE	2008	Has a Factory Winch	
700 4X4 (ALL including H1. TRV, TBX, MudPro)	2007-2015	15108	1
650 4X4 (ALL Including V2, H1, TRV, TBX, Mudpro)	2005-2010	15108	1
650 4X4 V2	2004	15148	
650 4X4 V2 LE	2004	Has a Factory Winch	
550 4X4 (including TRV)	2009-2012	15108	1
500 Alterra	2017	15193	
500 Altera XT	2016	15108	1
500 XR	2015	15108	1
500 4x4 TRV (including Core)	2013-2015	15108	1
500 4X4 (including TRV)	2009-2012	15108	1
500 4X4 (ALL Except 2005 TRV)	2005-2009	15108	1
500 4X4 TRV 2-UP	2005	15148	
500 4X4 (ALL Including TBX/TRV)	2002-2004	15148	
500 4X4 (ALL)	1999-2001	15147	
454 4X4 BEAR CAT 96-1998	1996-1998	15147	
450 4x4	2014	15109	
450 4X4 (incl TRV)	2010-2012	15108	
425 CR 4x4	2011-2013	15109	
400 ALTERRA	2017	15193	
400 4x4	2014	15109	
400 4x4 (ALL Including TBX/TRV)	2006-2010	15108	1
400 4X4 (ALL Including TBX/TRV)	2002-2005	15148	
400 4X4 1998-2001	1998-2001	15147	
375 AUTOMATIC 4X4 02	2002	15148	
366 4x4	2008-2011	15109	
350 4x4	2011-2012	15109	
300 4X4 02-03	2002-2005	15148	
300 4X4 1998-2001	1998-2001	15147	
250 2x4/4X4	1999-2001	15147	
BOMBARDIER/CAN-AM			
1000 OUTLANDER 4X4 (XT has factory winch)	2012-2014	N/A	1
800R OUTLANDER 4X4	2012-2015	N/A	1
800 OUTLANDER 4X4 (XT has factory winch)	2006-2011	15113	
800 OUTLANDER MAX 2-UP (XT has factory winch)	2006-2011	15113	
650 OUTLANDER 6X6	2015	N/A	1
650 OUTLANDER(Mud Version)	2013	15108	1
650 OUTLANDER 4X4 (XT has factory winch)	2006-2012	15113	
650 OUTLANDER MAX 2-UP (XT has factory winch)	2006-2012	15113	
650 QUEST 4X4 (XT has factory winch)	2002-2003	15116	

Footnotes

1. Vehicle equipped from factory with 4-bolt winch mount that fits Bulldog 2.5k 15006 and 3.5k 15005 winches. This replacement mount is only required for Bulldog's 2k 15001 and 3k 15002 winches (2-bolt mounting).
2. Also fits Bulldog 4k 15004 winch & 6k 15022
3. Newer models require front plastic to be cut.
4. Must cut front plastic for fairlead.
5. Will not fit 15001 2k & 15002 3k
6. Discontinued when out
7. 4-Bolt Winch Mount Only
8. Fairlead Mount Only. Vehicle Equipped With Winch Mount From Factory

Always Check The Website For Latest Listings

WWW.BULLDOGWINCH.COM/ATVUTVMOUNTS.HTML

• ROLLER FAIRLEAD NOT INCLUDED

BOMBARDIER/CAN-AM	Year	Fits 2k to 3.5k	Notes
500 OUTLANDER 4X4	2014	15108	1
500 OUTLANDER 4X4 (XT has factory winch)	2013	N/A	1
500 OUTLANDER MAX 4X4 (XT has factory winch)	2007-2011	15113	
500 OUTLANDER 4X4 (XT has factory winch)	2007-2012	15113	
500 TRAXTER MAX 2-UP (XT has factory winch)	2003-2005	15116	
500 TRAXTER & XL 4X4 (XT has factory winch)	1999-2005	15116	
450 OUTLANDER L / MAX	2015	15108	1
400 OUTLANDER MAX 2-UP (XT has factory winch)	2004-2012	15115	
400 OUTLANDER 4x4 (XT has factory winch)	2003-2014	15115	
330 OUTLANDER 4x4 (XT has factory winch)	2004-2005	15115	
CF MOTO			
CF400 AU	2016	15186	
HONDA			
TRX 650/680 RINCON	2003-2016	15117	
TRX 500 FOREMAN RUBICON	2015-2019	15181	7
TRX 500 FOREMAN	2014-2019	15181	7
TRX 500 FOREMAN	2012-2013	15166	5
TRX 500 FOREMAN RUBICON	2012-2014	15101	
TRX 500 FOREMAN/FOREMAN & RUBICON	2009-2011	15101	
TRX 500 FOREMAN & RUBICON (ALL)	2007-2008	15119	
TRX 500 FOREMAN E.S.	2005-2006	15158	
TRX 500 FOREMAN RUBICON & GPSCAPE	2005-2006	15103	
TRX 500 FOREMAN RUBICON	2001-2004	15137	4
TRX 475 FOREMAN RUBICON	2015	15181	7
TRX 450 FOREMAN 4X4	1998-2004	15105	
TRX 420 RANCHER (INDEPENDENT REAR)	2015-2019	15181	7
TRX 420 RANCHER (INDEPENDENT REAR)	2014	15114	
TRX 420 RANCHER (STRAIGHT AXLE)	2014-2019	15181	7
TRX 420 RANCHER	2007-2013	15114	
TRX 400 RANCHER	2004-2007	15107	
TRX 400 FOREMAN 4X4	1995-2001	15105	
TRX 350 RANCHER	2000-2006	15107	
TRX 300 2X4/4x4	1993-2000	15144	
TRX 250 RECON	1997-2017	15141	3
KAWASAKI			
750 BRUTE FORCE 4X4	2005-2017	15133	
700 PRAIRIE 4x4	2004-2006	15126	
650 BRUTE FORCE 4X4 INDEPENDENT AXLE	2010-2012	15133	
650 BRUTE FORCE 4X4 INDEPENDENT AXLE	2007-2009	15130	
650 BRUTE FORCE 4X4 STRAIGHT AXLE	2006-2013	15123	
650 BRUTE FORCE 4X4 STRAIGHT AXLE	2005	15125	6
KVF 650 PRAIRIE 4X4	2002-2003	15126	
360 PRAIRIE (ALL)	2003-2011	15120	
300 BRUTE FORCE	2012-2014	15177	



15131



15132



15136



15138

Footnotes

1. Vehicle equipped from factory with 4-bolt winch mount that fits Bulldog 2.5k 15006 and 3.5k 15005 winches. This replacement mount is only required for Bulldog's 2k 15001 and 3k 15002 winches (2-bolt mounting).
2. Also fits Bulldog 4k 15004 winch & 6k 15022
3. Newer models require front plastic to be cut.
4. Must cut front plastic for fairlead.
5. Will not fit 15001 2k & 15002 3k
6. Discontinued when out
7. 4-Bolt Winch Mount Only
8. Fairlead Mount Only. Vehicle Equipped With Winch Mount From Factory

WWW.BULLDOGWINCH.COM/ATVUTVMOUNTS.HTML

Always Check The Website For Latest Listings

>> ATV WINCH MOUNTS

- CUSTOM FABRICATED STEEL WINCH MOUNTS TO FIT YOUR ATV
- ROLLER FAIRLEAD NOT INCLUDED, FAIRLEAD IS INCLUDED WITH WINCH KIT OR SEPARATELY



15108



15119



15127



15130

ARCTIC CAT	Year	Fits 2k to 3.5k	Notes
1000 4x4 Thundercat	2008-2013	15108	1
700 Altera XT	2016	15108	1
700 XR	2015	15108	1
700 4x4 TRV LE	2008	Has a Factory Winch	
700 4X4 (ALL including H1. TRV, TBX, MudPro)	2007-2015	15108	1
650 4X4 (ALL Including V2, H1, TRV, TBX, Mudpro)	2005-2010	15108	1
650 4X4 V2	2004	15148	
650 4X4 V2 LE	2004	Has a Factory Winch	
550 4X4 (including TRV)	2009-2012	15108	1
500 Alterra	2017	15193	
500 Altera XT	2016	15108	1
500 XR	2015	15108	1
500 4x4 TRV (including Core)	2013-2015	15108	1
500 4X4 (including TRV)	2009-2012	15108	1
500 4X4 (ALL Except 2005 TRV)	2005-2009	15108	1
500 4X4 TRV 2-UP	2005	15148	
500 4X4 (ALL Including TBX/TRV)	2002-2004	15148	
500 4X4 (ALL)	1999-2001	15147	
454 4X4 BEAR CAT 96-1998	1996-1998	15147	
450 4x4	2014	15109	
450 4X4 (incl TRV)	2010-2012	15108	
425 CR 4x4	2011-2013	15109	
400 ALTERRA	2017	15193	
400 4x4	2014	15109	
400 4x4 (ALL Including TBX/TRV)	2006-2010	15108	1
400 4X4 (ALL Including TBX/TRV)	2002-2005	15148	
400 4X4 1998-2001	1998-2001	15147	
375 AUTOMATIC 4X4 02	2002	15148	
366 4x4	2008-2011	15109	
350 4x4	2011-2012	15109	
300 4X4 02-03	2002-2005	15148	
300 4X4 1998-2001	1998-2001	15147	
250 2x4/4X4	1999-2001	15147	
BOMBARDIER/CAN-AM			
1000 OUTLANDER 4X4 (XT has factory winch)	2012-2014	N/A	1
800R OUTLANDER 4X4	2012-2015	N/A	1
800 OUTLANDER 4X4 (XT has factory winch)	2006-2011	15113	
800 OUTLANDER MAX 2-UP (XT has factory winch)	2006-2011	15113	
650 OUTLANDER 6X6	2015	N/A	1
650 OUTLANDER(Mud Version)	2013	15108	1
650 OUTLANDER 4X4 (XT has factory winch)	2006-2012	15113	
650 OUTLANDER MAX 2-UP (XT has factory winch)	2006-2012	15113	
650 QUEST 4X4 (XT has factory winch)	2002-2003	15116	

Footnotes

1. Vehicle equipped from factory with 4-bolt winch mount that fits Bulldog 2.5k 15006 and 3.5k 15005 winches. This replacement mount is only required for Bulldog's 2k 15001 and 3k 15002 winches (2-bolt mounting).
2. Also fits Bulldog 4k 15004 winch & 6k 15022
3. Newer models require front plastic to be cut.
4. Must cut front plastic for fairlead.
5. Will not fit 15001 2k & 15002 3k
6. Discontinued when out
7. 4-Bolt Winch Mount Only
8. Fairlead Mount Only. Vehicle Equipped With Winch Mount From Factory

Always Check The Website For Latest Listings

WWW.BULLDOGWINCH.COM/ATVUTVMOUNTS.HTML

• ROLLER FAIRLEAD NOT INCLUDED

BOMBARDIER/CAN-AM	Year	Fits 2k to 3.5k	Notes
500 OUTLANDER 4X4	2014	15108	1
500 OUTLANDER 4X4 (XT has factory winch)	2013	N/A	1
500 OUTLANDER MAX 4X4 (XT has factory winch)	2007-2011	15113	
500 OUTLANDER 4X4 (XT has factory winch)	2007-2012	15113	
500 TRAXTER MAX 2-UP (XT has factory winch)	2003-2005	15116	
500 TRAXTER & XL 4X4 (XT has factory winch)	1999-2005	15116	
450 OUTLANDER L / MAX	2015	15108	1
400 OUTLANDER MAX 2-UP (XT has factory winch)	2004-2012	15115	
400 OUTLANDER 4x4 (XT has factory winch)	2003-2014	15115	
330 OUTLANDER 4x4 (XT has factory winch)	2004-2005	15115	
CF MOTO			
CF400 AU	2016	15186	
HONDA			
TRX 650/680 RINCON	2003-2016	15117	
TRX 500 FOREMAN RUBICON	2015-2019	15181	7
TRX 500 FOREMAN	2014-2019	15181	7
TRX 500 FOREMAN	2012-2013	15166	5
TRX 500 FOREMAN RUBICON	2012-2014	15101	
TRX 500 FOREMAN/FOREMAN & RUBICON	2009-2011	15101	
TRX 500 FOREMAN & RUBICON (ALL)	2007-2008	15119	
TRX 500 FOREMAN E.S.	2005-2006	15158	
TRX 500 FOREMAN RUBICON & GPSCAPE	2005-2006	15103	
TRX 500 FOREMAN RUBICON	2001-2004	15137	4
TRX 475 FOREMAN RUBICON	2015	15181	7
TRX 450 FOREMAN 4X4	1998-2004	15105	
TRX 420 RANCHER (INDEPENDENT REAR)	2015-2019	15181	7
TRX 420 RANCHER (INDEPENDENT REAR)	2014	15114	
TRX 420 RANCHER (STRAIGHT AXLE)	2014-2019	15181	7
TRX 420 RANCHER	2007-2013	15114	
TRX 400 RANCHER	2004-2007	15107	
TRX 400 FOREMAN 4X4	1995-2001	15105	
TRX 350 RANCHER	2000-2006	15107	
TRX 300 2X4/4x4	1993-2000	15144	
TRX 250 RECON	1997-2017	15141	3
KAWASAKI			
750 BRUTE FORCE 4X4	2005-2017	15133	
700 PRAIRIE 4x4	2004-2006	15126	
650 BRUTE FORCE 4X4 INDEPENDENT AXLE	2010-2012	15133	
650 BRUTE FORCE 4X4 INDEPENDENT AXLE	2007-2009	15130	
650 BRUTE FORCE 4X4 STRAIGHT AXLE	2006-2013	15123	
650 BRUTE FORCE 4X4 STRAIGHT AXLE	2005	15125	6
KVF 650 PRAIRIE 4X4	2002-2003	15126	
360 PRAIRIE (ALL)	2003-2011	15120	
300 BRUTE FORCE	2012-2014	15177	



15131



15132



15136



15138

Footnotes

1. Vehicle equipped from factory with 4-bolt winch mount that fits Bulldog 2.5k 15006 and 3.5k 15005 winches. This replacement mount is only required for Bulldog's 2k 15001 and 3k 15002 winches (2-bolt mounting).
2. Also fits Bulldog 4k 15004 winch & 6k 15022
3. Newer models require front plastic to be cut.
4. Must cut front plastic for fairlead.
5. Will not fit 15001 2k & 15002 3k
6. Discontinued when out
7. 4-Bolt Winch Mount Only
8. Fairlead Mount Only. Vehicle Equipped With Winch Mount From Factory

WWW.BULLDOGWINCH.COM/ATVUTVMOUNTS.HTML

Always Check The Website For Latest Listings



- ROLLER FAIRLEAD NOT INCLUDED



15144



15151



15152

POLARIS	Year	Fits 2k to 3.5k	Notes
1000 SPORTSMAN & XP	2015-2018	15151	
1000 SCRAMBLER XP	2015-2016	15151	
900 ACE 4x4	2016	15151	
850 SCRAMBLER	2013-2014	15151	
850 SPORTSMAN SP	2014-2019	15151	
850 SPORTSMAN XP/HO (including Touring)	2009-2017	15151	
850 SPORTSMAN HO HIGH LIFTER	2016	15151	
800 SPORTSMAN 4X4	2011-2014	15151	4
800 SPORTSMAN 4X4	2005-2010	15159	
800 SPORTSMAN 800 X2 & TOURING TWO-UP	2007-2009	15159	
700 SPORTSMAN 4X4 X2 TWO-UP	2008	15159	
700 SPORTSMAN MV7 4X4	2005-2006	Has a Factory Winch	
700 SPORTSMAN 4X4	2005-2007	15104	
700 SPORTSMAN 4X4	2002-2004	15159	
600 SPORTSMAN 4X4	2005	15104	
600 SPORTSMAN 4X4	2003-2004	15159	
570 ACE SP	2016	15151	
570 SPORTSMAN 4X4	2014-2019	15151	
550 SPORTSMAN XP (and Touring/X2)	2009-2015	15151	
500 SPORTSMAN X2 & TOURING TWO-UP	2007-2009	15159	
500 SPORTSMAN 4X4 X2 TWO-UP	2006	15142	6
500 ATP H.O. 4X4	2004-2005	15157	
500 SPORTSMAN 4X4	2011-2013	15151	4
500 SPORTSMAN 4X4	2004-2010	15159	
500 SPORTSMAN 4X4	2001-2003	15157	
500 SPORTSMAN 4X4	1996-2000	15102	
500 SPORTSMAN 6X6	2000-2008	15157	
500 MAGNUM/XPLORER 4x4	1997-2000	15102	
500 BIG BOSS 6X6	1998-1999	15146	
455 DIESEL 4X4	1999-2000	15102	
450 SPORTSMAN HO	2016-2019	15151	
450 SPORTSMAN 4x4	2006-2007	15159	
425 XPEDITION 4X4	2000	15102	
425 MAGNUM (ALL)	1995-1998	15146	
400 HO SPORTSMAN 4x4	2011-2014	15151	0.4
400 SPORTSMAN H.O. 4X4	2008-2010	15150	
400 SPORTSMAN 4X4	2004-2005	15159	
400 SPORTSMAN 4X4	2001-2003	15157	
400L XPLORER 4X4	2001-2002	15157	
400L XPLORER 4X4	1995-2000	15102	
400L SPORTSMAN/BIG BOSS 4X4/6X6	1994-1998	15146	
370 ACE 4X4	2014	15151	

Footnotes

1. Vehicle equipped from factory with 4-bolt winch mount that fits Bulldog 2.5k 15006 and 3.5k 15005 winches. This replacement mount is only required for Bulldog's 2k 15001 and 3k 15002 winches (2-bolt mounting).
2. Also fits Bulldog 4k 15004 winch & 6k 15022
3. Newer models require front plastic to be cut.
4. Must cut front plastic for fairlead.
5. Will not fit 15001 2k & 15002 3k
6. Discontinued when out
7. 4-Bolt Winch Mount Only
8. Fairlead Mount Only. Vehicle Equipped With Winch Mount From Factory

Always Check The Website For Latest Listings

WWW.BULLDOGWINCH.COM/ATVUTVMOUNTS.HTML



• ROLLER FAIRLEAD NOT INCLUDED

POLARIS	Year	Fits 2k to 3.5k	Notes
335 SPORTSMAN 4x4	1998-2000	15102	
330 ATP 4X4	2004-2005	15157	
325/330 MAGNUM 4X4	2000-2006	15157	
325 SPORTSMAN ETX	2015	15151	
300 SPORTSMAN 4X4	2008-2010	15150	
300 HAWKEYE	2007	15150	
300 HAWKEYE	2006	15150	
300 XPLORER 4X4	1996-1999	15102	
SUZUKI			
750 KING QUAD RUGGED	2017	15136	
750 KING QUAD	2008-2017	15136	
700 TWIN PEAKS	2004-2005	15126	
700 KING QUAD	2005-2007	15136	
500 VINSON 4X4 (ALL)	2002-2007	15143	
500 KING QUAD	2009-2017	15136	
450 KING QUAD	2007-2010	15136	
400 KING QUAD	2008-2017	15152	
400 EIGER (ALL)	2002-2007	15143	
LTF 280X/300 KING QUAD 91-1998	1991-1998	15135	
LT4WD, LTF 250 90-1998	1990-1998	15135	
YAMAHA			
700 KODIAK	2016-2017	15185	
700 GRIZZLY	2016-2019	15185	
700 GRIZZLY 4X4 (ALL)	2007-2015	15132	
660 GRIZZLY 4X4	2002-2008	15131	
600 GRIZZLY 4X4	1998-2001	15127	
550 GRIZZLY 4X4 (All including Power Steer)	2009-2014	15132	
450 WOLVERINE 4X4	2006-2009	15140	
450 GRIZZLY 4X4	2009-2014	15112	
450 GRIZZLY 4X4	2007-2008	15138	
450 KODIAK 4X4	2003-2006	15138	
400 BIG BEAR 4X4	2007-2012	15139	
400 BIG BEAR 4X4	2000-2006	15129	
400 KODIAK 4X4	2003-2006	15138	
400 KODIAK ULTRAMATIC 2000-02	2000-2002	15128	
400 GRIZZLY 4X4	2007	15138	
350 GRIZZLY 2x4, 4x4 (ALL)	2007-2014	15138	
350 BRUIN 350 4x4	2004-2006	15138	
350 WOLVERINE 2x4	2006-2009	15140	
350 WOLVERINE 4X4	1995-2005	15145	
300 GRIZZLY 2X4	2012-2013	15168	



15133



15157



15159

Footnotes

1. Vehicle equipped from factory with 4-bolt winch mount that fits Bulldog 2.5k 15006 and 3.5k 15005 winches. This replacement mount is only required for Bulldog's 2k 15001 and 3k 15002 winches (2-bolt mounting).
2. Also fits Bulldog 4k 15004 winch & 6k 15022
3. Newer models require front plastic to be cut.
4. Must cut front plastic for fairlead.
5. Will not fit 15001 2k & 15002 3k
6. Discontinued when out
7. 4-Bolt Winch Mount Only
8. Fairlead Mount Only. Vehicle Equipped With Winch Mount From Factory

WWW.BULLDOGWINCH.COM/ATVUTVMOUNTS.HTML

Always Check The Website For Latest Listings

>> UTV WINCH MOUNTS

- Custom fabricated steel winch mounts to fit your utv
- FAIRLEAD MNT





15153



15134



15154



15155



15156

ARCTIC CAT	Year	Fits 2k to 3.5k	Notes
WILDCAT X 1000	2011-2017	15192	
1000 PROWLER	2010-2013	15170	
1000 PROWLER	2009	15154	
700 HDX PROWLER CREW	2017	15189	8
700 HDX PROWLER XT	2016	15189	8
700 PROWLER (All)	2010-2013	15170	
700 PROWLER	2008-2009	15154	
650 PROWLER	2006-2009	15154	
550 PROWLER	2010-2012	15170	
550 PROWLER	2009	15154	
500 HDX PROWLER XT	2016	15189	8
500 PROWLER	2014	15170	
BOBCAT			
3400 4X4	2012-2014	15169	2
CAN AM			
COMMANDER 800, 1000	2011-2017	15164	2
COMMANDER 1000-4	2015	N/A	
MAVERICK 1000 TURBO	2016	15178	2
MAVERICK 1000	2013-2015	15178	2
DEFENDER HD8, HD10	2016-2017	15188	
DEFENDER HD5	2017	15188	
HONDA			
BIG RED	2009-2013	15155	
PIONEER 1000 / 1000-5	2016-2020	15190	2
PIONEER 1000-3 LE	2017-2019	15190	2
PIONEER 700 DELUXE / 5	2017	15180	2
PIONEER 700(including PIONEER-4)	2014-2016	15180	2
PIONEER 500	2015-2017	15183	2
JOHN DEERE			
GATOR 855D	2013-2016	15171	2
GATOR 825i	2011-2016	15171	2
GATOR RSX 860i	2016	15175	2
GATOR RSX 850i	2012-2013	15175	2
GATOR XUV 590i	2016	15175	2
GATOR XUV 550	2013-2016	15175	2
KAWASAKI			
MULE PRO-FXR	2018	15184	2
MULE PRO-FXT	2015-2019	15184	2
MULE PRO DX (diesel)	2016	15184	2
MULE SX 4x4	2017	15122	
4010 Mule (2 Door & 4 Door) except Diesel	2009-2018	15106	
3010 MULE TRANS 4x4 Diesel (4-door)	2005-2007	15121	1
800 TERYX 4X4 (INCLUDING LE), & 4 DOOR	2014-2018	15176	2
750/800 TERYX 4X4	2008-2013	15134	
750/800 TERYX 4 DOOR	2012-2013	15176	2
620 MULE 4X4	2003-2005	15121	1
400 MULE 610 4x4	2005-2016	15122	
300 MULE 550 4X4	2004	15121	1
KUBOTA			
RTV-X 1120	2014	15173	2
RTV-X 1100-C	2015	N/A	

Footnotes

1. Vehicle equipped from factory with 4-bolt winch mount that fits Bulldog 2.5k 15006 and 3.5k 15005 winches. This replacement mount is only required for Bulldog's 2k 15001 and 3k 15002 winches (2-bolt mounting).
2. Also fits Bulldog 4k 15004 winch & 6k 15022
3. Newer models require front plastic to be cut.
4. Must cut front plastic for fairlead.
5. Will not fit 15001 2k & 15002 3k
6. Discontinued when out
7. 4-Bolt Winch Mount Only
8. Fairlead Mount Only. Vehicle Equipped With Winch Mount From Factory

Always Check The Website For Latest Listings

WWW.BULLDOGWINCH.COM/ATVUTVMOUNTS.HTML



KUBOTA	Year	Fits 2k to 3.5k	Notes
RTV 900	2008-2013	15172	2
RTV-X 900	2014	15173	2
RTV400/500	2012-2014	15173	2
POLARIS			
RZR 1000-S	2017-2018	15187	2
RZR 1000 / RZR-4 1000	2014-2018	15182	2
RZR 1000 XP-4 TURBO	2016-2017	15187	2
RZR 1000 TURBO	2017-2019	15187	2
GENERAL 1000 DELUXE	20,172,019	15187	2
GENERAL 1000 BASIC	2016-2017	15187	2
GENERAL 1000 DELUXE	2016	N/A	
RANGER 1000 XP / CREW	2019	15194	
RANGER 1000 XP / CREW	2017-2018	15174	2
RZR 900 TRAIL	2018-2019	15187	2
RZR XC 900-S	2016	15187	2
RZR 900 / 900S	2015-2019	15182	2
RZR 900 / RZR-4 900	2011-2014	15167	2,5
RANGER 900 XP (INCLUDING CREW) FULL SIZE	2013-2019	15174	2
RANGER DIESEL HST	2017	15174	2
RANGER 900 DIESEL	2011	15156	
RZR 800 / RZR-S 800 / RZR-4 800	2008-2014	15153	
RANGER 800	2010-2014	15156	
RANGER 800 MIDSIZE	2013-2014	15165	2
RANGER 700	2009	15156	
RANGER 700 6x6 / CREW	2009	15111	2
RANGER 700	2005-2008	15111	2
ACE 900	2016	15151	
ACE 570	2015	15151	
ACE	2014	15151	
RZR 570-S	2017	15153	
RZR 570 & Trail	2012-2016	15153	
RANGER 570 FULL-SIZE	2016-2018	15165	2
RANGER 570 XP FULL-SIZE	2016	15174	2
RANGER 570 FULL-SIZE	2015	15174	2
RANGER 570 CREW EPS (MID)	2018-2019	15165	2
RANGER 570 MID-SIZE	2015-2019	15165	2
RANGER 570	2014	15165	2
RANGER 500 MID-SIZE	2017-2019	15165	2
RANGER 500	2011-2013	15165	2
RANGER 500	2009-2010	15156	
RANGER 500	2003-2008	15111	2
RANGER 400	2010-2013	15165	2
RANGER 325 ETX	2015-2016	15165	2
RANGER EV-ELECTRIC	2012-2016	15165	2
YAMAHA			
VIKING-6 700 (6 PASSENGER)	2015-2016	15179	2
VIKING 700	2014-2018	15179	2
RHINO 700	2008-2013	15110	2
RHINO 660	2004-2007	15110	2
RHINO 450	2006-2009	15110	2
WOLVERINE 700 / R-SPEC	2015-2017	15191	2



15165 LR



15179 LR



15182



15187



15191

Footnotes

1. Vehicle equipped from factory with 4-bolt winch mount that fits Bulldog 2.5k 15006 and 3.5k 15005 winches. This replacement mount is only required for Bulldog's 2k 15001 and 3k 15002 winches (2-bolt mounting).
2. Also fits Bulldog 4k 15004 winch & 6k 15022
3. Newer models require front plastic to be cut.
4. Must cut front plastic for fairlead.
5. Will not fit 15001 2k & 15002 3k
6. Discontinued when out
7. 4-Bolt Winch Mount Only
8. Fairlead Mount Only. Vehicle Equipped With Winch Mount From Factory

WWW.BULLDOGWINCH.COM/ATVUTVMOUNTS.HTML

Always Check The Website For Latest Listings

>> RECEIVER MOUNTS - POWERSPORT/UTILITY

Part#	Description
20061R2	2" x 2" Receiver Mount - Powersports/Utility Winch
20316	1-1/4" x 1-1/4" Receiver Mount - Powersports/Utility Winch

- Fits All Bulldog Winch Powersports/Utility 2K To 6K
- Provides Receiver Mount For Utility Use
- Portable Mounting Option
- Use Mounting Channel (Included With Most Bulldog Winches) To Use Winch With Fairlead
- Accepts Two 5/8" Shackles (20006 Sold Separately) As Anchor Points.





• 20061R2




• 20316

Mount Most Common Power Units & Contactors

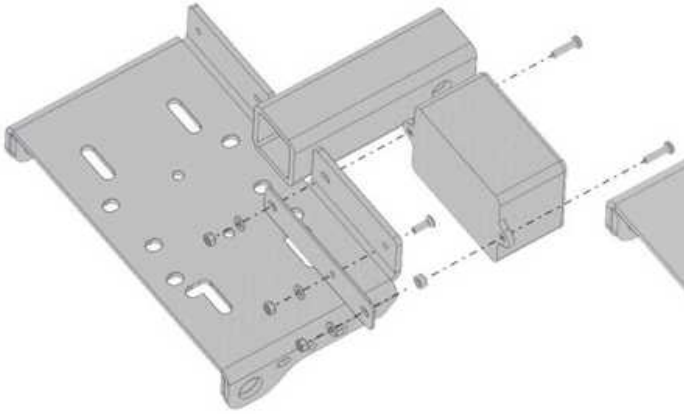


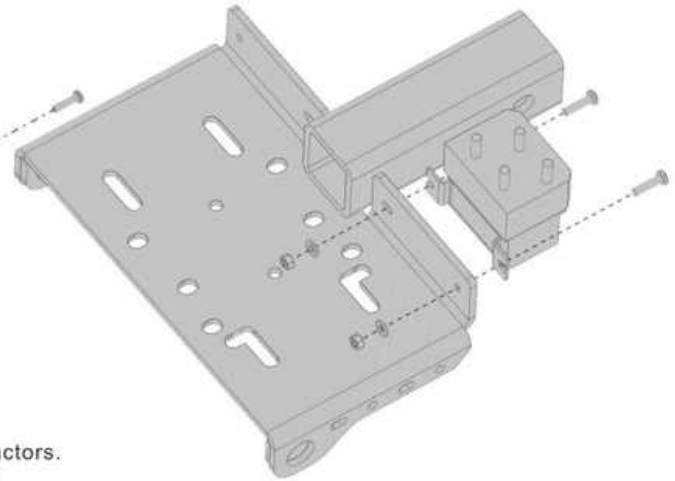

- The mount is designed to fit most powersports winches from 2K to 6K.
- It is also designed to mount common power units & contactors.
- If you want to use a fairlead you must also use the winch mounting channel (included with most bulldog winch powersports winches). Also available separately.

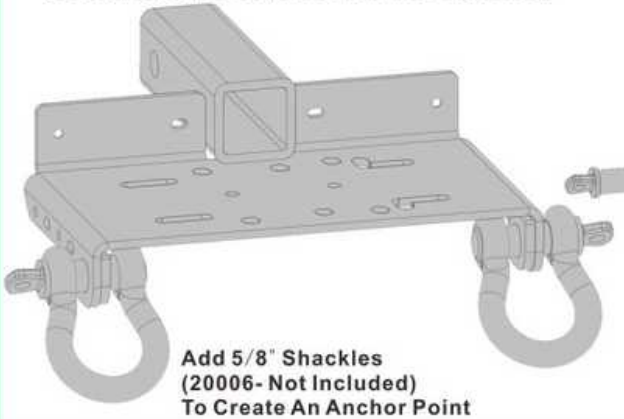


Add 5/8" Shackles (20006- Not Included) To Create An Anchor Point

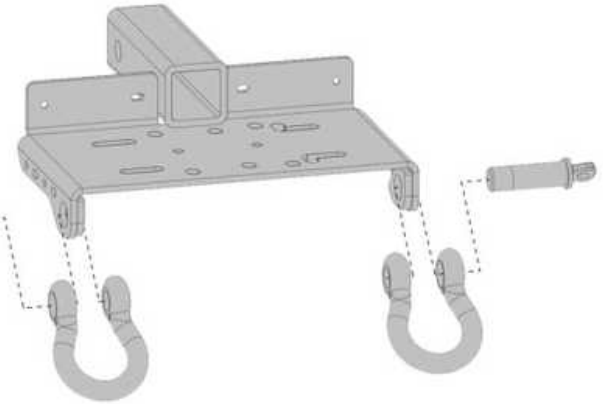

Add Shackles For Anchor Point

>> CHANNELS

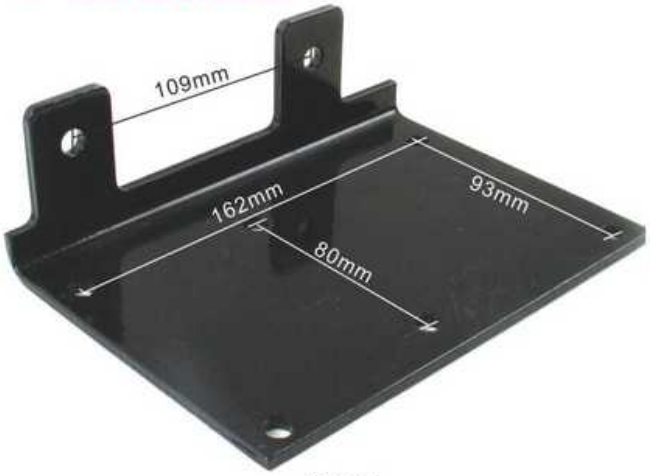

• 20007



• 20056



• 20063



• 20060



• 20279

Mounting Channels	Winch Mounting Pattern	2nd Mounting Pattern	Fairlead Mount	Fits Winch Models
20007	80mm 2-Bolt center mount	162x93mm 4-Bolt	109mm	15001, 15002 early production
20056	80mm 2-Bolt center mount	162x93mm 4-Bolt	122.5mm	15001, 15002 current
20063	124x76mm 4-Bolt	80mm 2-Bolt center mount	122.5mm	15005, 15006
20060	168x76mm 4-Bolt	80mm 2-Bolt center mount	165mm	15004
20279	168x76mm 4-Bolt	80mm 2-Bolt center mount	165mm	15022(Grey)

• Provides a mounting surface for the winch and roller fairlead.

>> WIRING KITS



• 20205



• 20206/20207

2GA 32mm²

Part#	Description
20205	2Ga Wiring Kit 7.5' FRONT
20206	2Ga Wiring Kit 20' REAR-STD BED
20207	2Ga Wiring Kit 24' REAR-EXT CAB/LONG BED

- Provides power connection to front or rear of vehicle.
- Includes assembled double power/ground wire with looped ends, dust cover, quick connectors-2 halves-one on wire & one for winch wire & cable ties to secure wires.
- Quick connect compatible with 20133.



• 20025



• 20043/20026

3GA 25mm²

Part#	Description
20025	3Ga Wiring kit7.5'-value FRONT-PRE-ASSEMBLED
20043	3Ga Wiring kit 16'-value REAR
20026	3Ga Wiring kit 24'-value REAR

- Includes double power/ground wire with looped ends, complete quick connector, dust cover and cable ties to ecure the wires.
- Universal fit cut-to-length.
- Quick connect compatible with 20018.

***See pages 27-28 for full selection of quick connects.**



• 20304



• 20305

6GA 14mm²

Part#	Description
20304	12" UTV 6GA Extension Wire Kit

- Used when battery is mounted toward back of vehicle & longer leads are needed.

Part#	Description
20305	48" + 20" 6GA ATV/UTV Wire Kit
20306	96" + 20" 6GA ATV/UTV Wire Kit
20307	120" + 20" 6GA ATV/UTV Wire Kit

- Used to provide power connections for portable winch mount
- 20" with quick connect for winch side and 3 lengths for ATV/UTV side

>> WIRING KITS

1/0GA
54mm²

Part#	Description
20347	1/0Ga Wiring Kit 7.5' FRONT

- Provides power connection to front of vehicle.
- Fits most trucks - battery to grill

Includes:
-7.5ft double power/ground wire with looped ends
-100% copper wire meets SAE J1127
-quick connector-2 halves-one on wire & one extra for winch wire
-dust cover
-cable ties to secure wires
-(quick connect compatible with 20172)



• 20347

Part#	Description
20348	1/0Ga Wiring Kit 24' REAR

- Provides power connection to rear of vehicle.
- Fits most pickups with extended cabs & long beds.

Includes:
-24ft double power/ground wire with looped ends
-100% copper wire meets SAE J1127
-quick connector-2 halves-one on wire & one extra for winch wire
-dust cover
-cable ties to secure wires
-(quick connect compatible with 20172)



• 20348



Power interrupt kit available on page 40

>> BOOSTER CABLE SET

Part#	Description
20197	2GA Booster Cable Set 20'-Plug To Plug, Heavy Duty

600 Amp
2GA • 20 Ft.

- Great Set For Work Trucks
- Quick Connects Make Easy Trouble Free Connections
- Handy Storage Case For Cables In Vehicle



• 20197



HANDY STORAGE CASE

INCLUDES:



2ga x 7.5ft power wire set and quick connect for mounting on truck



Weather Cover for Vehicle Plug



2ga x 20ft Booster Cable Set. Twin extruded jacket for easier handling



2000AMP Cast Brass Clamps, Heavy Duty with angled jaws for better connections in tight areas

Part#	Description
20298	2GA x 20ft Booster Cable Set - ONLY



• 20298

>> BOOSTER CABLE SET

Part#	Description
20334	1/0GA Booster Cale Set 25ft - Heavy Duty

1000 Amp
1/0GA • 25 Ft.

- Great Set For Work Trucks
- Premium 2000 Amp Cast Brass Clamps
- 100% Copper Wire Meet SAE J1127
- Flexible And Durable Twin Extruded TPE Jacket Rated T 105C Degrees
- Heavy Duty Storage Case



• 20334

INCLUDES:



1/0ga x 7.5ft power wire set and quick connect for mounting on truck



Weather Cover for Vehicle Plug



1/0ga x 25ft Booster Cable Set.



2000AMP Rated Premium Cast Brass Clamps with 45 degree angled nose

Part#	Description
20335	1/0GA Booster Cabel Set 25ft - Clamp-to-Plug

- Great Set For Work Trucks
- Premium 2000 Amp Cast Brass Clamps
- 100% Copper Wire Meet SAE J1127
- Flexible And Durable Twin Extruded TPE Jacket Rated T 105C Degrees
- Heavy Duty Storage Case



2000AMP Rated Premium Cast Brass Clamps With 45 Degree Angled Nose



• 20335

>> BOOSTER CABLE SET

Part#	Description
20233	2GA Booster Cable Set 20'-Clamp to Clamp, Heavy Duty

600 Amp
2GA • 20 Ft.

- Great Set For Work Trucks
- Premium 2000 AMP Cast Brass Clamps
- Flexible And Durable Twin Extruded TPE Jacket Rated To 105C Degrees
- Handy Storage Case For Cables In Vehicle



• 20233



2000AMP Rated Premium Cast Brass Clamps With 45 Degree Angled Nose

Part#	Description
20219	2GA x 15ft Booster Cable Set - ONLY

- Plug Ended.
- Great Set For Work Trucks & Fleets.
- Quick Connects Make Easy Trouble Free Connections.
- Flexible And Durable Twin Extruded TPE Jacket Rated T 105c Degrees
- 2GADouble Wire For Easier Handling



• 20219

>> BOOSTER CABLE SET

Part#	Description
20332	1/0GA Booster Cable Set 20'-Clamp to Clamp, Heavy Duty
20333	1/0GA Booster Cable Set 30'-Clamp to Clamp, Heavy Duty

1000 Amp
1/0GA

- Great Set For Work Trucks
- Premium 2000 AMP Cast Brass Clamps
- 100% Copper Wire Meets SAE J1127
- Flexible And Durable Twin Extruded TPE Jacket Rated To 105C Degrees
- Handy Storage Case For Cables In Vehicle



• 20332-20333



2000AMP Rated Premium Cast Brass Clamps With 45 Degree Angled Nose

Part#	Description
20336	1/0GA Booster Cable Set 15ft - Plug Ended

- Great Set For Work Trucks & Fleets.
- Quick Connects Make Easy Trouble Free Connections
- 1/0 Gauge Double Wire For Easier Handling
- 100% Copper Wire Meet SAE J1127
- Flexible And Durable Twin Extruded TPE Jacket Rated T 105C Degrees



• 20336



20047



20133



20172

SETS:

- POLYCARBONATE HOUSING FOR STRENGTH & DURABILITY
- HIGH GRADE COPPER TERMINALS SILVER PLATED FOR CORROSION PROTECTION.
- INCLUDES 1PC DUST COVER WITH WIRE TETHER
- UL APPROVED
- COMPATIBLE WITH ANDERSON,W AND OTHER CONNECTORS
- EACH SET INCLUDES 2 CONNECTORS,4 TERMINALS & 1 DUST COVER

Part#	AMPS	AWG
20047	50A	6AWG
20133	175A	2AWG
20172	350A	1/0AWG

AMP RATING IS BASED ON CONTINUOUS DUTY.

- 20157/20158/20159



DUST COVER

- INDIVIDUAL DUST COVERS WITH WIRE TETHER

Part#	AMPS
20157	50A
20158	175A
20159	350A



- 20375/20376/20377

>> SEALING COVER

Part#	Description
20375	Sealing Cover For 50A Quick Connect
20376	Sealing Cover For 175A Quick Connect
20377	Sealing Cover For 350A Quick Connect

- Back side sealing cover for quick connector
- Protects and keeps connections clean and free from dust, dirt, salt and other harmful debris
- Molded PVC
- Ends can be trimmed to correct wire size



- 20018

- VALUE QUICK CONNECTOR

NOT COMPATIBLE WITH OTHER CONNECTORS


Part#	AMPS	AWG
20018	175A	3AWG

INCLUDES 2 CONNECTORS,4 TERMINALS & 1 RUBBER DUST COVER

SIZE SPECIFICATIONS



50A 175A 350A

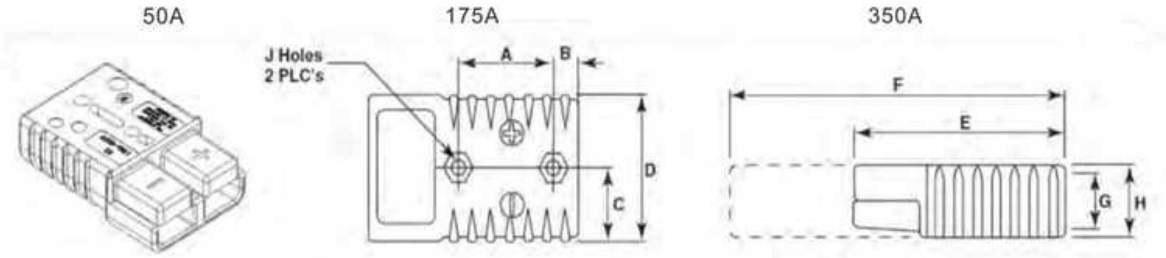


1 PAIR	SIZE	A	B	C	D	E	F	G	H	J	SET WIRE SIZE
20047	50Amp	0.75"/19mm	0.25"/6mm	0.72"/18mm	1.44"/37mm	1.88"/48mm	3.19"/81mm	0.45"/11mm	0.63"/16mm	0.14"/4mm	6 AWG
20133	175Amp	1.13"/29mm	0.44"/11mm	1.09"/28mm	2.19"/56mm	3.13"/80mm	5.25"/133mm	0.75"/19mm	1.00"/25mm	0.27"/7mm	2 AWG
20172	350Amp	1.13"/29mm	1.38"/35mm	1.38"/35mm	2.75"/70mm	4.25"/108mm	7.19"/183mm	1.06"/27mm	1.31"/33mm	0.27"/7mm	1/0 AWG

AMP RATING IS BASED ON CONTINUOUS DUTY.

TERMINALS


- HIGH GRADE COPPER WITH SILVER PLATING
- OFFERED IN PAIRS WITH UNIQUE AWG WIRE GAUGE SIZE

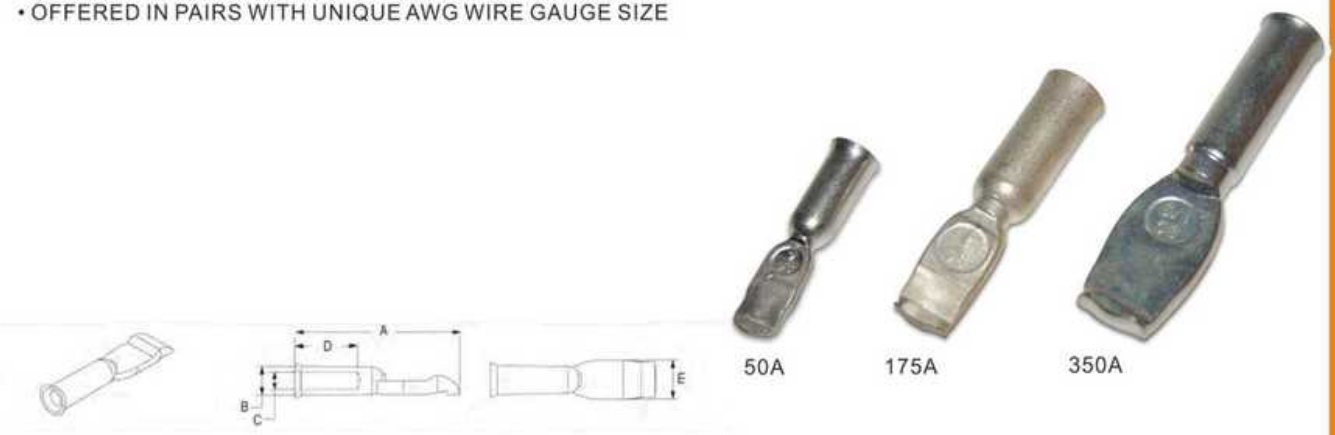

1 PAIR	SIZE	A	B	C	D	E	WIRE SIZE
20160	50A	1.18"/30.0mm	0.28"/7.2mm	0.14"/3.5mm	0.45"/11.4mm	0.28"/7.1mm	10/12AWG
20161		1.18"/30.0mm	0.28"/7.2mm	0.19"/4.7mm	0.45"/11.4mm	0.28"/7.1mm	8AWG
20162		1.18"/30.0mm	0.28"/7.2mm	0.22"/5.6mm	0.45"/11.4mm	0.28"/7.1mm	6AWG
20164	175A	2.35"/59.7mm	0.52"/13.1mm	0.30"/7.5mm	1.02"/25.9mm	0.50"/12.7mm	4AWG
20165		2.35"/59.7mm	0.52"/13.1mm	0.35"/8.9mm	1.08"/27.4mm	0.50"/12.7mm	2AWG
20166		2.35"/59.7mm	0.52"/13.1mm	0.39"/9.9mm	1.08"/27.4mm	0.50"/12.7mm	1AWG
20167		2.35"/59.7mm	0.52"/13.1mm	0.44"/11.1mm	1.08"/27.4mm	0.50"/12.7mm	1/0AWG
20168	350A	2.91"/73.9mm	0.51"/13.0mm	0.44"/11.1mm	1.25"/31.8mm	0.81"/20.6mm	1/0AWG
20169		2.96"/75.1mm	0.64"/16.3mm	0.49"/12.4mm	1.29"/32.8mm	0.81"/20.6mm	2/0AWG
20170		2.96"/75.1mm	0.70"/17.9mm	0.58"/14.7mm	1.29"/32.8mm	0.81"/20.6mm	3/0AWG
20171		2.96"/75.1mm	0.75"/19.1mm	0.64"/16.3mm	1.29"/32.8mm	0.81"/20.6mm	4/0AWG



Most power units can be remote mounted off of winch by extending the wires and mounting to new location using existing holes on base plate.
If you need assistance please call us

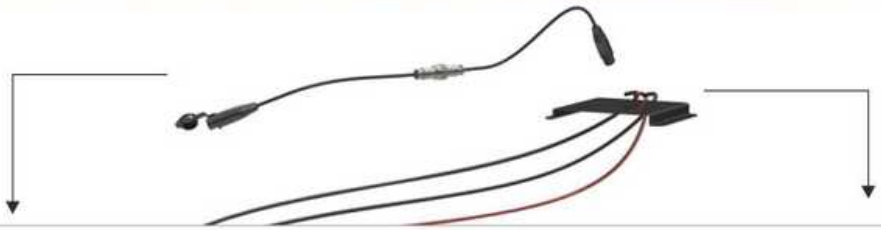

2) 3ft Plug Extension

20135
3ft Plug Extension for Standard Series - 3-prong push-in plug current 10001, 10002, 10003, 10004, 10005



20309
3ft Plug Extension for Standard Series - 5 -prong push-in plug current 10041 through 10046



20062
3ft Plug Extension for Standard Series Twist-Lock plug older version 10001, 10002, 10003, 10005



20175A-3 PLUG
20175B-4 PLUG
20175
3ft 4 Prong Plug Extension for Alpha



20149B
4-Prong and also works in older 3-Prong plugs

20149A
3ft Plug Plug Extension for 10012 heavy-duty 15K



20396
3ft Plug Plug Extension for 10057,10058,10059,10060



20443
3ft Plug Plug Extension for 10065,10066,10067,10068

NEW




Common Bumper Installation Issues and Solutions

Mounting a winch inside a bumper can create several issues:

1) **NO SPACE AVAILABLE FOR POWER UNIT.** There may not be space for the power unit in its vertical position mounted on the motor OR in the rotated position in a foot forward winch mount. Solution: All Bulldog Non-Integrated Truck winch power units can be remote mounted using our Remote Mount Kit. The Remote Mount Kit provides 6ft motor cables and a mounting bracket for the power unit. This allows you to remote mount it up to 6ft away from winch and within 6ft of battery.

2) **HAND CONTROL PLUG IS DIFFICULT TO ACCESS.** Maybe the winch and power unit fit inside the bumper but now the plug on the winch is difficult to get to. Or you've remote mounted the power unit and you don't want to raise the hood to use the winch. Bulldog offers a 3ft plug extension to mount the plug in a more accessible location.



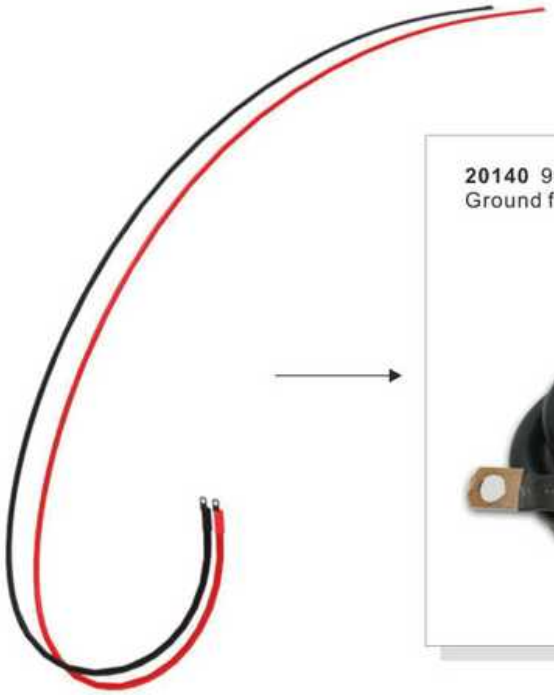

20140 9ft Leads, Power and Ground for Truck Winch



Common Bumper Installation Issues and Solutions

Mounting a winch inside a bumper can create several issues:

3) **ORIGINAL BATTERY CABLES ARE NOT LONG ENOUGH.** BULLDOG WINCH truck winches are equipped with 6ft power and ground cables for battery connections. Some vehicles like the 2011 Super Duty mount the battery in the back right corner of the engine compartment and if the winch is mounted in front of the bumper on a grille guard mount the original 6ft cables will not be long enough. Bulldog offers a replacement set of 9ft power and ground cables 20140 for these extra long situations.

4) **SHIFTER IS DIFFICULT TO ACCESS.** Many times when mounting a winch inside a bumper, especially with foot forward mounting, the shifter ends up in a location that is difficult to access. Bulldog truck winches have gear boxes that are clockable. This means the gear box can be rotated to relocate the shifter to a more accessible location. Most gear boxes use a 10-bolt pattern so the gear box/shifter can be rotated in 36 degree increments in 9 different locations in addition to the original location. Clocking the gear box is different for various winch models so contact us with your model # and we will send you clocking instructions.

- IP68 Extreme Water Resistance
- Auto - Marine
- In Cab - Outdoor


12V-24V


>> ROCKER SWITCH-LIGHTED

Color	Part#	Description
	20255	"WHITE" ON/OFF 5-PIN W/BARRIERS
	20256	"RED" ON/OFF 5-PIN W/BARRIERS
	20257	"GREEN" ON/OFF 5-PIN W/BARRIERS
	20258	"BLUE" ON/OFF 5-PIN W/BARRIERS
	20259	"AMBER" ON/OFF 5-PIN W/BARRIERS



- Small Color Bar Lights When Switch Is OFF
- Large Color Bar Lights When Switch Is ON

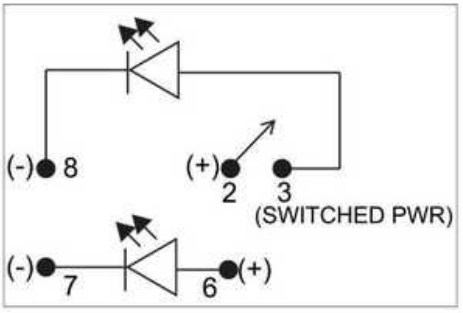


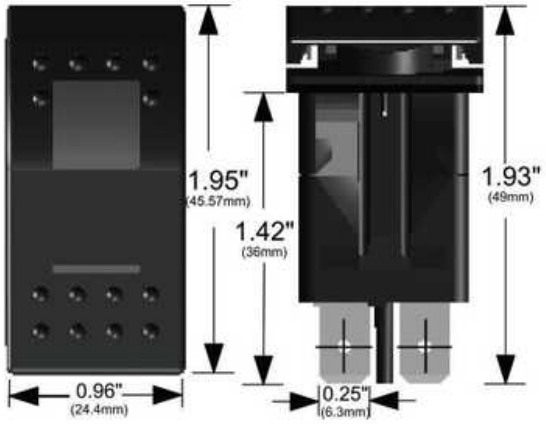


>> WINCH POWER ROCKER SWITCH

Color	Part#	Description
	20262	"RED" ON/OFF 5-PIN W/BARRIERS

- Double LED Lighted - 1-OFF-DASH & 1-ON

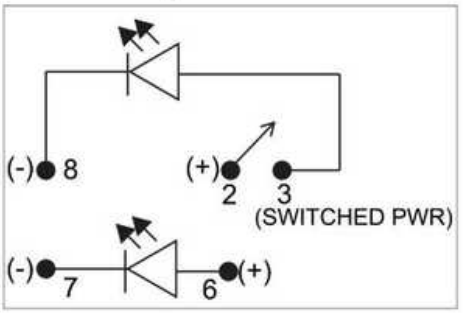


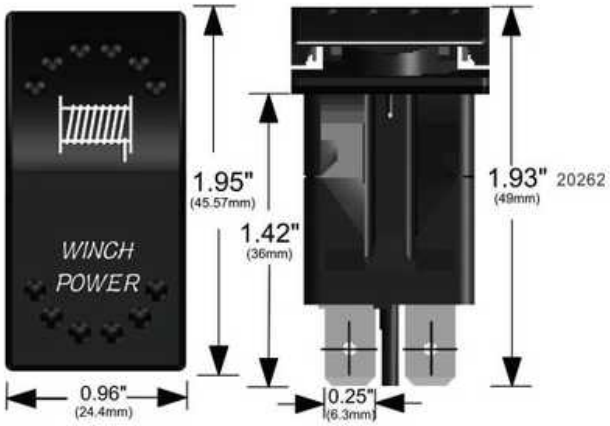


>> WINCH IN-OUT SWITCH

Color	Part#	Description
	20261	"WHITE" MOMENTARY ON-CENTER OFF-MOMENTARY ON 4PIN W/BARRIERS

- Switch Is Lighted When Winch Is Powered

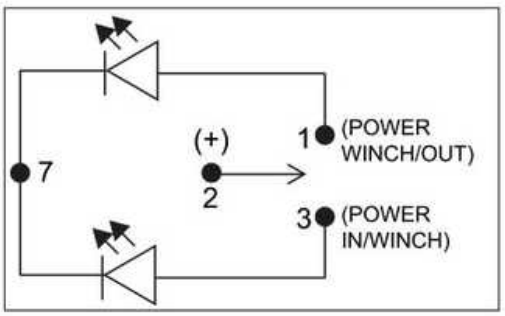

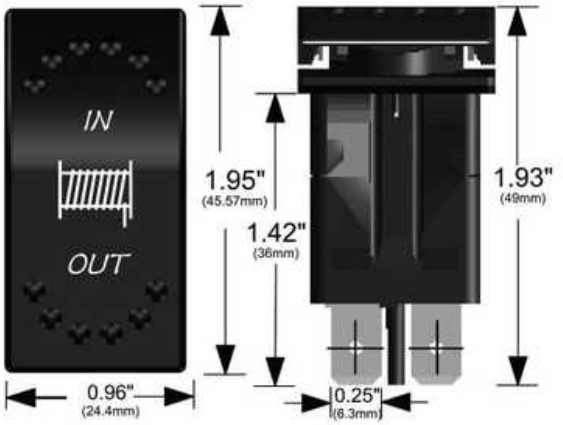



12V-24V

>> LED LIGHT BAR ROCKER SWITCH

Color	Part#	Description
	20260	"WHITE" ON/OFF 5-PIN W/BARRIERS

• Double LED Lighted - 1-OFF-DASH & 1-ON

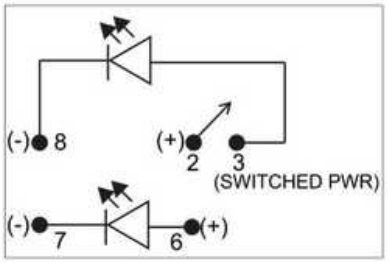


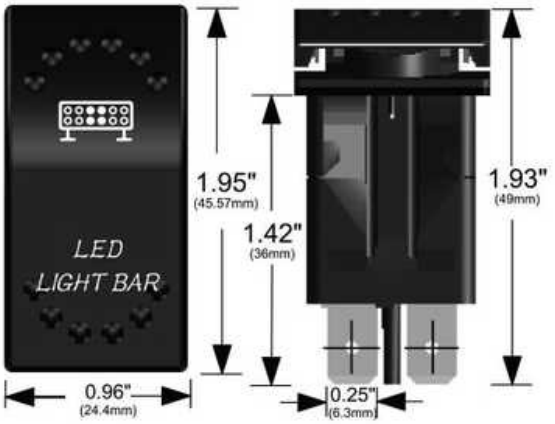


>> MOMENTARY ROCKER SWITCH-LIGHTED

Color	Part#	Description
	20284	"RED" MOMENTARY (ON)-OFF 3 PIN W/BARRIERS


• Small Color Bar Lights When Switch Is OFF
• Large Color Bar Lights When Switch Is ON

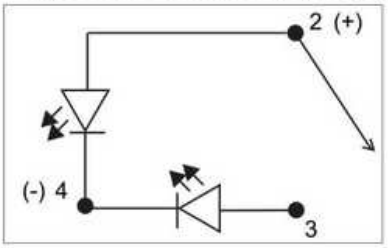


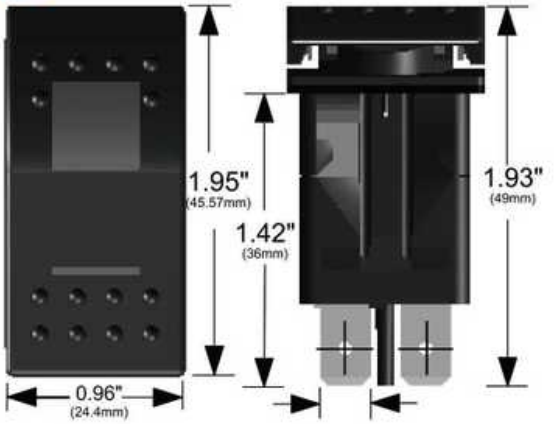

>> MOMENTARY ROCKER SWITCH


Color	Part#	Description
NONE	20285	MOMENTARY (ON)-OFF 4-PIN W/BARRIERS




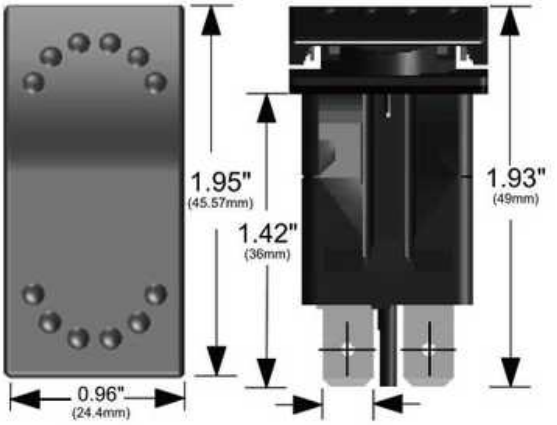


>> DC POWER PLUG ROCKER SWITCH

Color	Part#	Description
	20319	"RED" ON/OFF 3-PIN W/BARRIERS

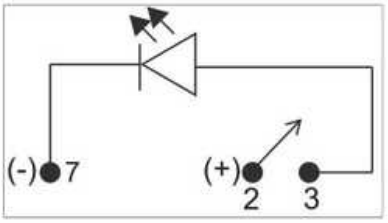

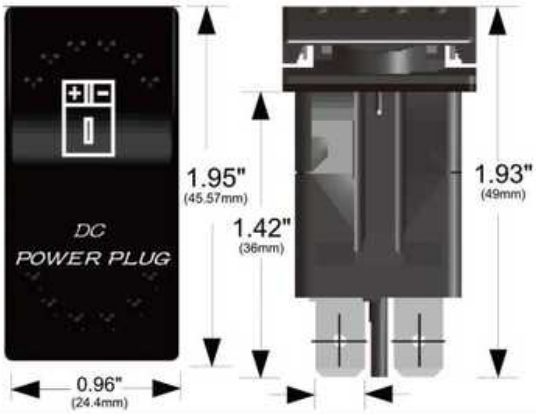



>> SWITCH MOUNTING PANELS

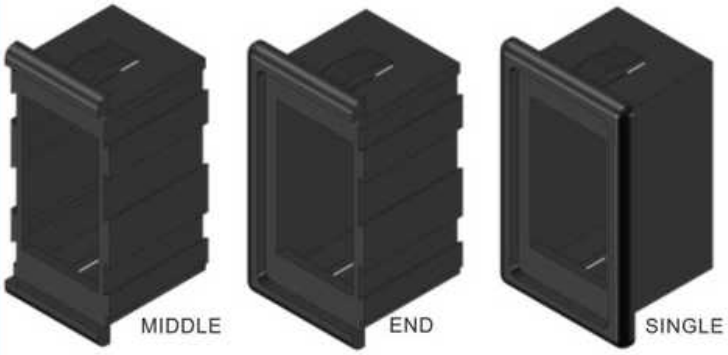


Part#	Description
20263	Middle
20264	End
20265	Single

- Used With Switches On Page 27&28.
- Build Your Own Switch Panel With These Stackable Middle & End Pieces.

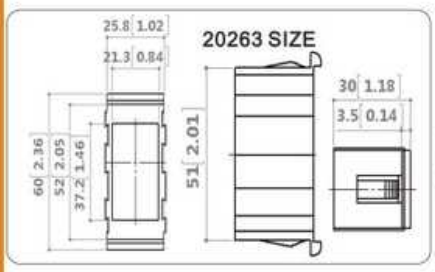

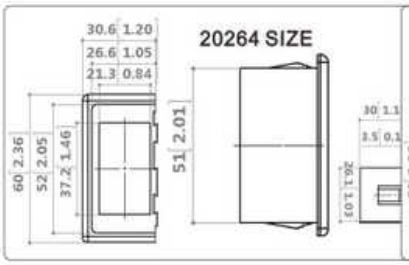

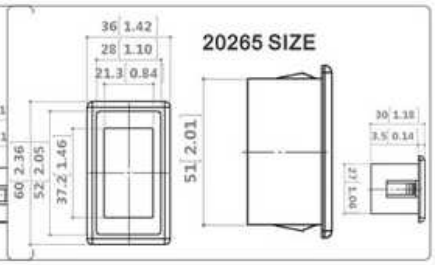



>> SWITCH LABELS

Part#	Description
20268	SWTICH LABELS FOR TRUCK - JEEP

- 50 Different Labels For Customizing Switches



• 20320

Part#	Description
20320	Bracket For Single Rocker Switch & Circuit Breaker

- Fits 20255x Switches.
- Fits 20318 Circuit Breaker Or Traditional Toggle Switch
- Universal Under Dash Design
- Steel For Strength



• 20319

Part#	Description
20319	"RED" ON/OFF 3-Pin Rocker Switch


Part#	Description
20318	Circuit Breaker - 10A




• 20318

Part#	Description
20364	"WHITE" ON/OFF 5-PIN AIR COMPRESSOR ROCKER SWITCH

• Double LED Lighted - 1-OFF-DASH & 1-ON

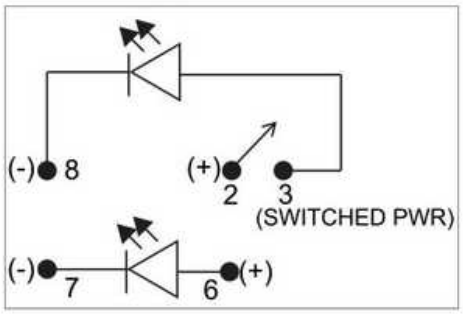

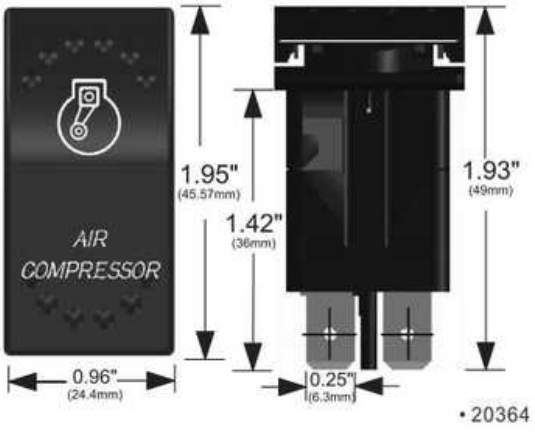


• 20364

>> 12V POWER SOCKET

Part#	Description
20286	12V-20A POWER SOCKET WITH COVER & 3 MOUNTING BRACKETS

- Water-tight Cap With Tether
- Large Contact Surfaces For Good Connection
- Twist-lock System-plug Locks Securely Into Socket
- 3 Mounting Brackets



UNDER & OVER
DASH MOUNTS




FLUSH MOUNT

TENT BRACKET DASH TOP BRACKET UNDER DASH

>> USB POWER SOCKET

Part#	Description
20287	DUAL USB PORT POWER SOCKET WITH COVER & 3 MOUNTING BRACKETS

- Water-tight Cap With Tether
- 5V 2.1A
- 5V 1A
- 3 Mounting Brackets
- Under & Over Dash Mounts



UNDER & OVER
DASH MOUNTS




FLUSH MOUNT

TENT BRACKET DASH TOP BRACKET UNDER DASH

12V-24V

>> SWITCH PANEL WITH LIGHTED BREAKERS

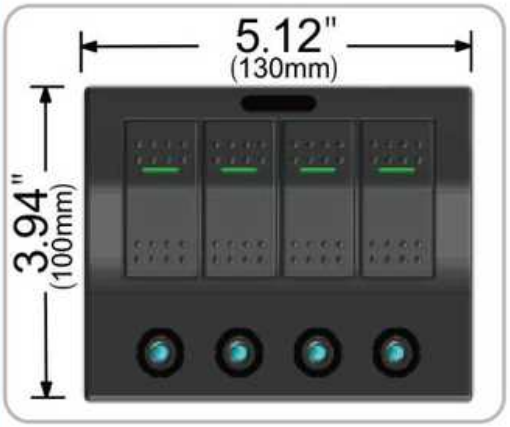

Part#	Description
20266	4 Switch Panel with Lighted Breakers


- 4 Switch Panel with Breakers
- 3 X Rocker & 1 X Momentary
- Individual Resettable Circuit Breakers For Each Switch
- 1x15A, 1x10A, 2x5A Breakers
- Individual Lights For Each Breaker & Switch In " On" Position - Red=OFF/Green=ON
- Customized ID Inserts For Each Switch Marker Light
- IP68 Extreme Water Resistance
- Auto - Marine - In Cab - Outdoor
- Openning Size 4.21" x 3.23" (107mm x 82mm)







NEW

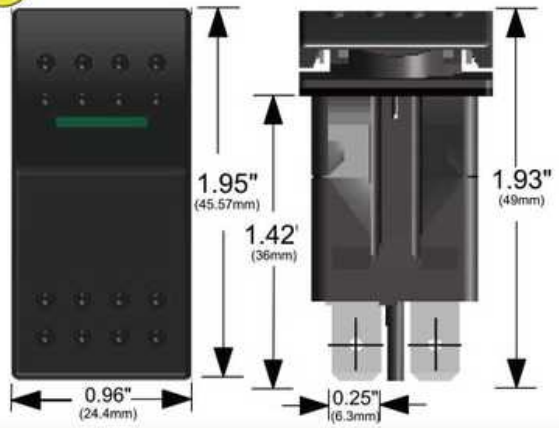


>> ROCKER SWITCH-LIGHTED

Color	Part#	Description
	20373	"GREEN" ON-OFF-4PIN
	20374	"GREEN" Momentary (ON)-OFF-4PIN

- Switch Is Lighted When Winch Is Powered.

12V-24V

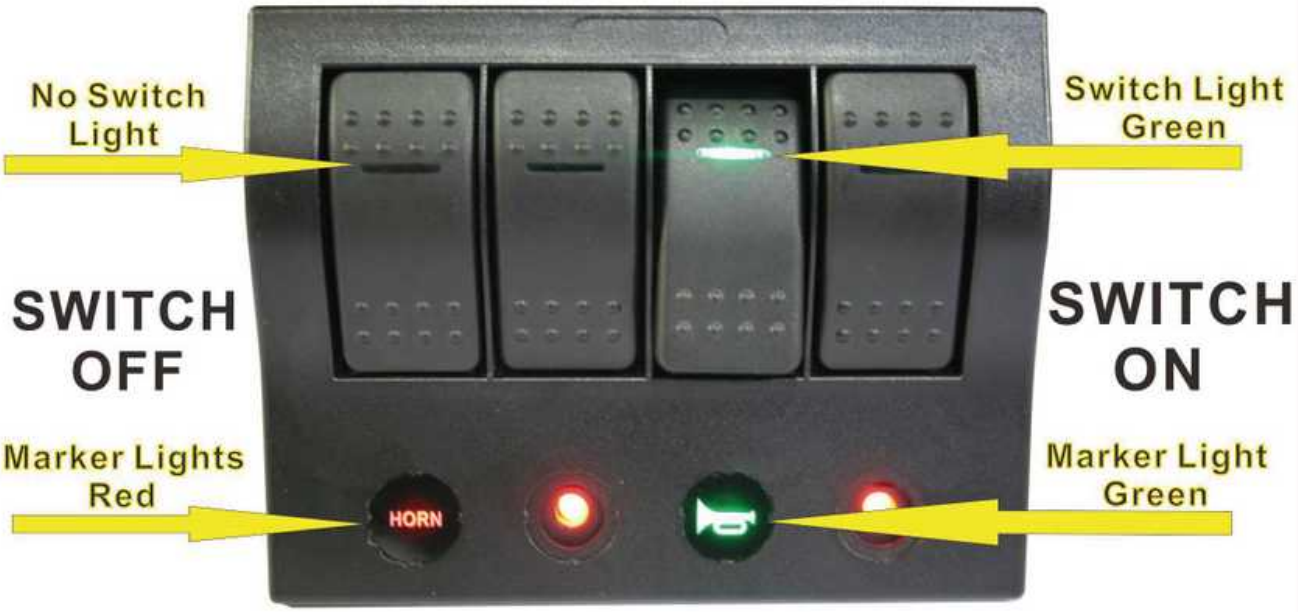

Marker Light Inserts




12V-24V

>> SWITCH PANEL WITH BREAKERS & VOLTMETER

Part#	Description
20267	5 Switch Panel with Voltage Meter

- 5 Switch Panel With Voltage Meter
- 5 X Rocker Switches
- Individual Resettable Circuit Breakers For Each Switch
- 1x15A, 2x10A, 2x5A Plus 5A For Voltmeter
- Individual Lights For Each Switch In " On" Position - Red
- Customized ID Inserts For Each Switch
- IP68 Extreme Water Resistance
- Auto - Marine - In Cab - Outdoor
- Openning Size 6.42" x 3.39" (163mm x 86mm)



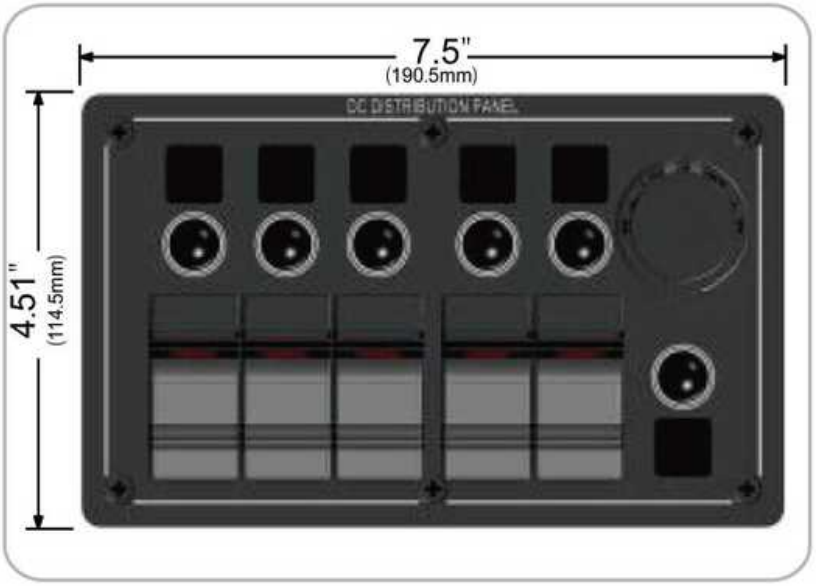



12V-24V



Marker Light Inserts For 20267



NEW



• 20445

>> SWITCH PANEL

Part#	Description
20445	8 gang switch panel

- Conveniently connect accessories to under-hood control box
- Mode of switches changeable from standard to momentary or pulsing
- Fused circuits included 2x30A, 2x20A, 2x10A, 2x5A
- Potted under-hood control box for water and dust protection



Includes:


8 Gang Switch Panel


Switch Control Box


Mounting brackets


Voltage Protection Breaker


Wiring


Hardware


10PCS Cable Ties


Self-adhestive Switch Label

>> SWITCH PANEL

Part#	Description
20446	8 gang switch panel - bluetooth

- Conveniently connect accessories to under-hood control box
- Bluetooth allows activation by your phone
- Mode of switches changeable from standard to momentary or pulsing
- Fused circuits included 2x30A, 2x20A, 2x10A, 2x5A
- Potted under-hood control box for water and dust protection



• 20446






Bluetooth operation with Customizable App:



Includes:

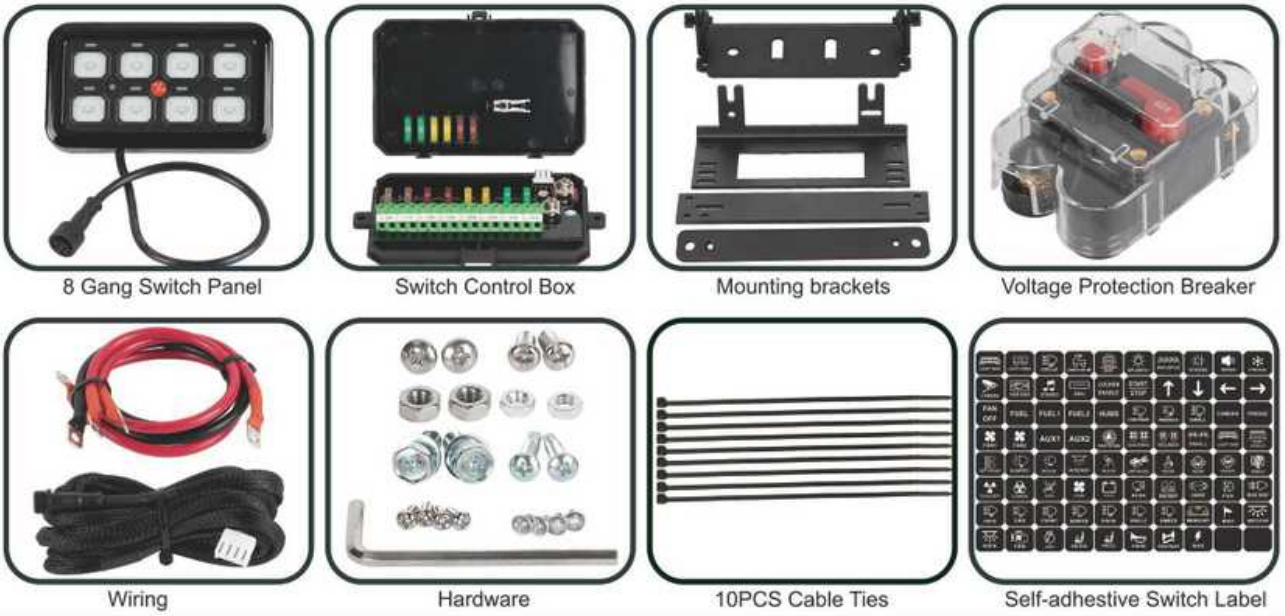




>> LIMIT SWITCH

Part#	Description
20403	Limit Switch


- Switches power OFF & ON in critical space areas, ie trailer doors
- Momentary OFF-Center ON-Momentary OFF
- Roller wheel contact
- 2" adjustable length contact
- IP62
- 4-Bolt 21x56mm mounting patterns (hardware not included)



>> SWITCH WIRING - 16AWG

Part#	Description
20328	Switch Power Wire With Spade Connector - Red
20329	Switch Ground Wire With Spade Connector - Black


- Switch Power Wire - Spade To Open
- 5-1/4" Length
- 6PCS

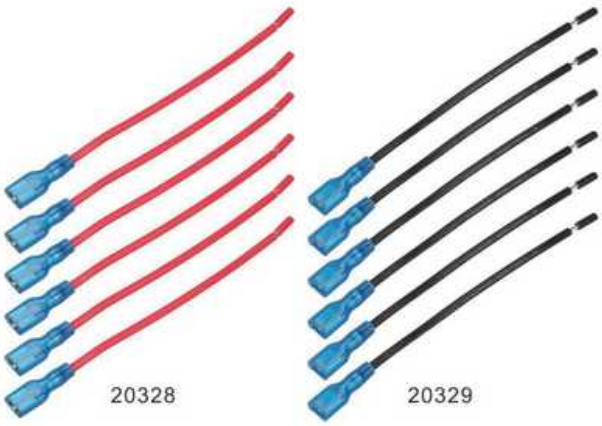

20328 20329

Part#	Description
20330	Spade to Spade Jumper Wire - Red
20331	Spade to Spade Jumper Wire - Black

- 4" Length
- 6PCS

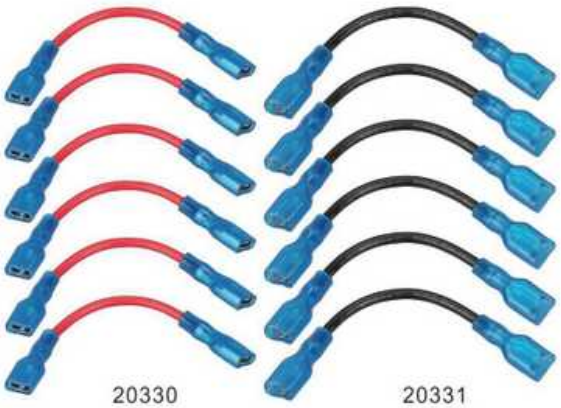

20330 20331

Part#	Description
25054	8 Multi-Spade Connector Wire - Red
25055	8 Multi-Spade Connector Wire - Black

- Great For Connecting Up To 8 Spade Connections



25054 25055

>> ANL FUSE HOLDER

Part#	Description
20354	ANL FUSE HOLDER FOR 300A TO 400A FUSES, 0 TO 4 GAUGE

- Fuse not included
- Easily added onto main power wire for overload protection
- Cut power wire and strip insulation back 1", insert into opening & tighten set screw
- Fuses available separately
  20355 300A
  20356 350A
  20357 400A



20354

>> ANL FUSE

Part#	Description
20355	300A ANL FUSE
20356	350A ANL FUSE
20357	400A ANL FUSE

- Works with 20354 ANL fuse holder



20355/20356/20357

>> AFS FUSE HOLDER

Part#	Description
20359	AFS FUSE HOLDER FOR 200A TO 250A FUSES, 4 TO 8 GAUGE

- Fuse not included
- Easily added onto main power wire for overload protection
- Cut power wire and strip insulation back 1/2", insert into opening & tighten set screw
- Fuses available separately
  20360 200A
  20361 250A



20359

>> AFS FUSE

Part#	Description
20360	200A AFS FUSE - 4PCS
20361	250A AFS FUSE - 4PCS

- Works with 20359 AFS fuse holder



20360/20361

>> AFS FUSE

Part#	Description
20386	100A AFS FUSE - 4PCS - PURPLE
20387	150A AFS FUSE - 4PCS - YELLOW

- Works with 20359 AFS fuse holder



20386

20387

>> SHUT-OFF SWITCHES



• 20247 • 20248

Part#	Description
20247	400AMP Shut-OFF Switch- Removeable Key
20248	500AMP Shut-OFF Switch - Heavy Duty - Metal Housing



• 20079

Part#	Description
20079	Master power shut-off kit - 200A

- Allows interruption of the main power cable for effective protection against unauthorized use of accessories. Includes our 20039 Shut Off Switch plus:
- Mounting Bracket
- 1ft Power Cable for Battery Connection
- 2 Removable Keys
- 2 Terminal Boots For Safety

Part#	Description
20039	Shut-off switch - 200A

>> POWER INTERRUPT KIT



• 20416/20417

Part#	Description
20416	Solenoid - 450A
20417	Solenoid -600A

Part#	Description
20415	Power interrupt kit - 450A
20420	Power interrupt kit -600A

- Provides extra safety to cut off power to winch power wire when not in use.
- Switch is mounted inside vehicle for in-cab control.



• 20415/20420

>> POWER INTERRUPT KIT

Part#	Description
20038	Power interrupt kit - 300A

- Provides extra safety to cut off power to winch power wire when not in use.
- Switch is mounted inside vehicle for in-cab control.



• 20038

Part#	Description
20212	Wireless Control

- 45FT working range.
- For 3400 & 4400 trailer/utility winches
- Easy plug-in to existing plug
- 23A battery included
- ON/OFF switch to prevent accidental activation
- Red led lights up when activated
- Slight delay when starting& stopping



• 20212

Part#	Description
20099R2	Wireless Controller, Powersports winches with Relays

- Convenient power in/power out control from any position within 45ft radius.
- Allows operator to keep clear from dangerous rigging.
- Operator can monitor winching from different positions.
- Includes complete replacement relay control pack with wireless controller installed. Replaces original relay controller and provides wiring for original handlebar rocker switch.
- Fits Bulldog 15001 and 15002.



• 20099R2

Part#	Description
20194	Cover for Wireless Controller

- Neoprene cover for 20156 wireless.
- Clear window allows wireless to be used while protected inside cover.
- Water resistant.
- Hook&Loop backing to attach to tank or instrument panel.



• 20194

>> WIRELESS CONTROLLERS

Part#	Description
20408	Wireless Control

- 65ft working range
- Circuits designed for rigorous use
- Compact ergonomic design
- On/off with delay to prevent accidental usage




• 20408



• 20408-1

Part#	Description
20408-1	Wireless Adapter Plug

- For 20408 Wireless
- Universal Adapter

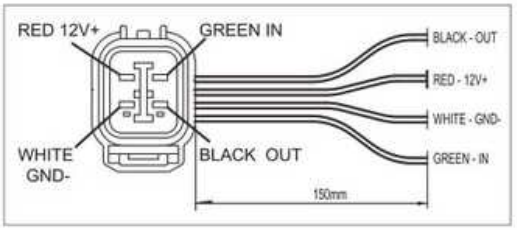

>> WIRELESS ADAPTERS

NEW

Part#	Description
20408-2	Wireless Adapter Plug

- 20408 Adapter Plug for 20289/20315
- For 10041x



Part#	Description
20408-3	Wireless Adapter Plug

- 20408 Adapter Plug for 20080/20178
- For 10061x, 10029x, 10031x



Part#	Description
20408-8	Wireless Adapter Plug

- 20408 Adapter Plug for 20220
- For 15017x



Part#	Description
20408-9	Wireless Adapter Plug

- 20408 Adapter Plug for 20397/20398
- For 10057x



Part#	Description
20408-10	Wireless Adapter Plug

- 20408 Adapter Plug for 20125B
- For 10009, 10013, 10027x, 10047x



Part#	Description
20408-11	Wireless Adapter Plug

- 20408 Adapter Plug for 20383/20384
- For 12001x, 12003x



>> 10001X STANDARD SERIES REV.B



20100
- Power unit assembly, truck.
- Complete power unit assembly including solenoids and wiring.
- Compatible with Bulldog 8k through 12k truck winches.



20088
- Solenoid, replacement for truck winch.
- Replacement solenoid for Bulldog Truck & Mid-Range Winches compatible with Bulldog 4.5k through 12k winches.



20178A
- Plug Female
- Standard Series, solenoids



20081
- Hand control truck with twist-lock plug.
- Winch hand control with 12ft lead and twist lock plug.
- Works with Bulldog 8k to 12k winches with twist-lock plug.



20062
- 3ft Plug Extension for Standard Series
- Twist-Lock plug older version 10001, 10002, 10003, 10005

>> 10001X STANDARD SERIES REV.C&D



20078
- Control Pack, Premium Truck.
- Replaces standard solenoid power unit on Bulldog truck winches 8k to 12k Includes premium contactor switch.
- Mounts direct to motor terminals allowing improved visibility and access over drum.



20114
- 450A Contactor Truck.
- Replacement for 20078.



20204
- 450A with spade connectors
- Contactor Truck.
- Replacement for 20290



20178C & 20178D
- Plug Female
- 20178C Standard Series,20114 Contactor
- 20178D Standard Series,20204 Contactor



20080
- Hand control truck with 3-prong push-in plug
- Winch hand control with 12ft lead and 3-prong push-in plug.
- Works with Bulldog 6k to 12k winches with 3-prong plug

20227
- Rocker Switch, OE replacement - truck standard series
- Momentary ON-center OFF-momentary ON





20135
- 3ft Plug Extension for Standard Series
- 3-prong push-in plug current 10001, 10002, 10003, 10004, 10005

>> 10041X STANDARD SERIES



20290
- 450A Contactor.
- 1.5' Lead For Motor Connection.
- 6'(+) Battery Lead
- Works With 20289 Controller



20204
- 450A Contactor Truck.
- Replacement for 20290.



20426
- Shifter
- For 10041x truck winch



20315
- Plug Female
- Standard Series, 20204 Contactor



20289
- Hand Control Truck With 5-prong Push-in Plug
- 12FT Lead
- Works With Bulldog 8k To 12k Winches With 5-prong Plug



20309
- 3FT Plug Extension For Standard Series
- 5-prong Push-in Plug Current 10041 Through 10043.

>> 10027X,10047X ALPHA SERIES



20127 For 9.3K
- Control Pack, Premium Truck.
- Replaces Bulldog APLHA series truck winches Includes premium contactor switch.



20201 For 12.5K & 15K
- Control Pack, Premium Truck.



20129 500A with spade connectors
- Contactor Truck.
- Replacement for ALPHA



20125A 3-PRONG
20125B 4-PRONG
- Hand Control For Alpha10013 9.3K



20175A - 3 PLUG
20176B - 4 PLUG
- 3ft Plug Extension for ALPHA

>> 10012, 10063X HEAVY DUTY SERIES



20142 For 10012,10063,10064
- Control Pack, Premium HD Truck.



20144B
- Hand Control For 10012, 10063,10064-15K



20149B - 4 PLUG
- 3ft Plug Extension for 10012, 10063,10064-15K



20421
- 4-prong Push-in
- For 10012,10063,10064-15K, 10057-16.5K, 10059-18.5K



20425 500A with spade connectors
- Contactor Truck.
- Replacement for 10012,10063, 10064-15K, 10057-16.5K, 10059-18.5K

>> 10057X SERIES



20425 500A with spade connectors
- Contactor Truck.
- Replacement for 10012-15K, 10057-16.5K, 10059-18.5K



20398
- Hand Control For 10057-16.5K, 10059-18.5K



20396
- 3ft Plug Extension for 10057,10058-16.5K, 10059,10060-18.5K



20399
- Plug Female
- 4-Prong Push-in
- For 10057,10058-16.5K, 10059,10060-18.5K

>> 10065X TRUCK WINCH SERIES



20437
- 450A Contactor Truck.
- Replacement for 10065x.



20438
- 2-in-1 Controller
- 12FT Lead
- Wireless mode for winches with 4-prong plug
- Rplacement for 10065x



20439
- 4-prong Push-in
- Winch Mounted Female Plug For Hand Control
- For 10065x



20443
- 3ft Plug Extension for 10065x



20440
- Shifter
- For 10065x truck winch

>> 15017/15018/15019/15020 PARTS



20220
- 4-Prong Push-in Plug Hand Control
- 20ft lead
- For 15007 & 15019 trailer winches



20221
- Contactor, 3400 & 4400, 200A
- For 15017,15019 & 15021.

>> 12001X HOIST PARTS



20384
- Hand Control
- For 12001 12Vdc Hoist



20382
- Contactor, 200A
- For 12001 12Vdc Hoist



20383
- Plug female, 6-prong
- For 12001 12Vdc Hoist

>> 15001/15002 PARTS



20115
- Power Unit, 2k & 3k winch
- Complete power unit assembly including relays and wiring.
- Compatible with Bulldog 2k & 3k winches.



20151
- Mini Rocker Switch
- Universal handlebar mount
- Weather/water resistant
- 8ft wiring



20101
- Relay, 2k & 3k winch
- 5-prong.
- 60/80A 14VDC.
- For Bulldog 2k and 3k winches.

>> 15004/15005/15006 PARTS



20113
- Contactor, 2.5k, 3.5k & 4k, 200A
- For 15006 2.5k, 15005 3.5k & 15004 4k.

>> 15008 PARTS



20173
- Complete replacement hand control for 15008
- Includes movement & wiring
  6ft leads to battery
  4ft leads to motor



20174
- Utility Winch Movement
- In-Control switch
- Replacement for 15008

>> PARTS

Part#	Description	Wire Size	Hole Size mm
25003	Terminal Loop End 2pcs	3Ga(25mm²)	8
25011	Terminal Loop End 2pcs	3Ga(25mm²)	10
25012	Terminal Loop End 2pcs	2Ga(35mm²)	10
25056	Terminal Loop End 1pc	1/0Ga(54mm²)	3/8"



• 25003/25011/25012/25056

Part#	Description
20137	Wire sheating high heat 1/2"(14mm)x25ft
20138	Wire sheating high heat 3/8"(10mm)x25ft
20139	Wire sheating high heat 3/16"(5mm)x25ft

- Woven fiberglass protective cover
- Protects wire from extreme heat & abrasion
- Flexible
- Easy to cut to correct length using shop scissors
- Includes 2pcs of heat shrink to finish ends



• 20137/20138/20139

>> P-CLAMPS/WIRES CLAMPS

Part#	Description
20271	1/2" P-Clamp Set/4 - Fits 2GA Wire
20272	7/16" P-Clamp Set/4 - Fits 3GA Wire

- Cushioned Wire Clamps
- Set Of 4
- Includes Self-tapping Screws
- Safer Method Of Securing Wire



• 20271/20272

Part#	Description
20177	4PCS 2GA Boots
20176	4PCS 6GA Boots



• 20177/20176

>> SNATCH BLOCKS

Snatch Blocks	Breaking Capacity	Working Load Limit	Max Wire Rope Dia		Wheel Dia	Grease Port
			in	mm	in	
20004	4K	1.6K	1/4"	6.3	1.75	N
20023	8K	3.2K	5/16"	8	2.5	Y
20005	17K	7K	3/8"	9.5	4	Y
20049	19K	8K	3/8"	9.5	4	Y

- Increases your winch's pulling power.
- Changes direction of your pull without damaging the wire rope.
- A must for any winching job!



• 20004



• 20023



• 20005



• 20049

>> PULLEY BLOCKS

Snatch Blocks	Breaking Capacity	Working Load Limit	Max Wire Rope Dia		Wheel Dia	Grease Port
			in	mm	in	
20027	24K	9K	7/16"	12	5	Y
20028	30K	12K	1/2"	14	6	Y
20077	32K	16K	5/8"	18	8	Y

- Increases your winch's pulling power.
- Changes direction of your pull without damaging the wire rope.
- A must for any winching job!



• 2002/20028/20077

>> BLOCKS FOR SYNTHETIC ROPE

Snatch Blocks	Breacking Capacity	Working Load Limit	Max Wire Rope Dia.		Wheel Dia.	Grease Port
			in	mm	in	
20400	44K	22K	1/2"	12	4.68	Y
20401	45K	22.5K	9/16"	22	6.22	N

- Increases your winch's pulling power.
- Changes direction of your pull without damaging the wire rope.
- A must for any winching job!



• 20400



• 20401

>> SHACKLES - SCREW PIN TYPE

Shackles	Body Size	Pin Dia	BREAKING CAPACITY	Working Load Limit
20006	5/8"	3/4"	39K	6.5K
20020	3/4"	7/8"	57K	9.5K
20021	7/8"	1"	78K	13K
20117	1"	1-1/8"	102K	17K
20188	1-1/2"	1-11/16"	170K	34K

- Safely connects the looped ends of cables, chains, snatch blocks, and straps.
- Threaded pin for easy removal and securing.



• 20006/20020/20021/20117/20188

>> BLACK SHACKLE

Shackles	Body Size	Pin Dia	BREAKING CAPACITY	Working Load Limit
20150	3/4"	7/8"	57K	9.5K



• 20150

>> RED SHACKLE

Shackles	Body Size	Pin Dia	BREAKING CAPACITY	Working Load Limit
20448	3/4"	7/8"	57K	9.5K




• 20448

>> ROCK BAG

Part#	Description
20048	Winch rope dampener

- Helps absorb energy from wire rope failure.
- Easy to use, fill with rocks and zip up.
- Easy to store, empty and fold flat.
- Heavy duty abrasion and tear resistant material.



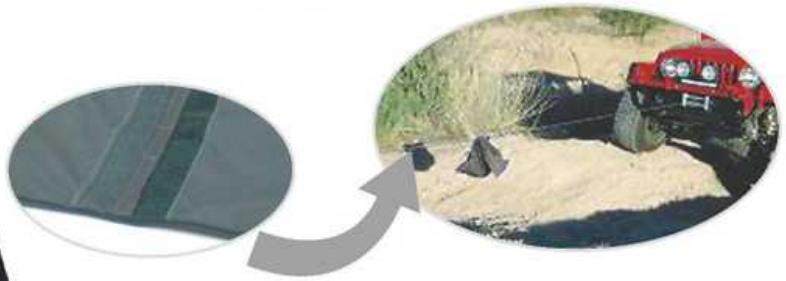

- Reinforced saddle to reduce abrasion/wear
- Hook & loop closure to secure position on rope

• 20048



Part#	Description
20203	Rigging Pouch

- Great for storing rigging.
- Compact roll-up design with straps & hook & loop closure.
- Durable woven polyester.
- Multiple pockets for storing wide variety of rigging parts.

• 20203



>> TRAIL GLOVES

Part#	Description
20070B	Trail Gloves

- XL
- Form Fitting For Better Feel
- Synthetic Leather (nylon/polyurethane) Palm And Fingers With Silicone Coating For Wear Resistance And Improved Grip



• 20070B



>> RIGGING/TOOL STORAGE BAG

Part#	Description
20058R2	Rigging/Tool Storage Bag

- Heavy duty bag for storing your trail gear
- 110lb capacity
- Multiple pockets for storing/organizing Smaller items
- Durable zipper
- Easy to carry handles & shoulder strap





• 20058R2

>> POWERSPORTS RIGGING KIT

Part#	Description
20034	7pc ATV Rigging Kit

- Roll-up tool style storage bag fits into small spaces.

QTY	Product	Breaking Strength	WLL
1	2"x8' Tree Saver Strap	8.8K	2.9K
1	Snatch Block	8K	3.2K
2	5/8" Shackle	39K	6.5K
1	Roll-up Storage Pouch		
1	Trail Gloves		
1	Rock Bag-wire Rope Dampener		



• 20034



>> 7PC TRUCK RIGGING KIT-VALUE

Part#	Description
20195	7pc Truck Rigging Kit-Value

INCLUDES:

Qty	Product	Breaking Strength	WLL
1	3"x6' Tree Saver Strap	30K	10K
1	2"x20' Recovery Strap	20K	6.7K
1	Snatch Block	17K	7K
2	3/4" Shackle	57K	9.5K
1	Pair of Trail Gloves		
1	Heavy Duty Storage Bag		



>> 7PC TRUCK RIGGING KIT

Part#	Description
20072	7pc Truck Rigging Kit

- Great trail kit.
- Main components for rigging & winching.

INCLUDES:

Qty	Product	Breaking Strength	WLL
1	3" x 10' Tree Saver Strap	30K	10K
1	Snatch Block	17K	7K
1	3/4" Bow Shackle	57K	9. 5K
1	5/6" x 10' G70 Chain	18. 8K	4. 7K
1	Pair of Trail Gloves		
1	Rock Bag Wire Rope Dampener		
1	Heavy Duty Storage Bag		



>> 8PC 8000LB WLL RIGGING KIT

- All rigging is minimum 8000lb WLL.
- Great kit for 8k winching.

Part#	Description
20073	8pc 80000LB WLL Rigging Kit

INCLUDES:

Qty	Product	Breaking Strength	WLL
1	3" x 10' Tree Saver Strap	30K	10K
1	3" x 30' Recovery Strap	30K	10K
1	Snatch Block	19K	8K
2	3/4" Shackle	57K	9.5K
1	Pair of Trail Gloves		
1	Rock Bag Wire Rope Dampener		
1	Heavy Duty Storage Bag		

>> 8PC 9000LB WLL RIGGING KIT

- All rigging is minimum 9000lb WLL.
- Great kit for 9k or 9.5k winching.

Part#	Description
20074	8pc 9000lb WLL Rigging Kit

INCLUDES:

Qty	Product	Breaking Strength	WLL
1	3" x 10' Tree Saver Strap	30K	10K
1	3" x 30' Recovery Strap	30K	10K
1	Snatch Block	24K	9K
2	3/4" Shackle	57K	9.5K
1	Pair of Trail Gloves		
1	Rock Bag Wire Rope Dampener		
1	Heavy Duty Storage Bag		



>> 7PC 12000LB WLL RIGGING KIT

- All rigging is minimum 12000lb WLL.
- Great kit for 12k winching.

Part#	Description
20075	7pc 12000LB WLL Rigging Kit

INCLUDES:

Qty	Product	Breaking Strength	WLL
1	4" x 30' Recovery Strap	40K	13.3K
1	Snatch Block	30K	12K
2	7/8" Shackle	78K	13K
1	Pair of Trail Gloves		
1	Rock Bag Wire Rope Dampener		
1	Heavy Duty Storage Bag		



>> 7PC 16000LB WLL RIGGING KIT

- All rigging is minimum 16000lb WLL
- Great for 16k winching

Part#	Description
20196	7pc 16000lb WLL Rigging Kit

INCLUDES:

Qty	Product	Breaking Strength	WLL
1	6" x 30' Recovery Strap	60K	20K
1	Snatch Block	32K	16K
2	1" Shackle	102K	17K
1	Pair of Trail Gloves		
1	Heavy Duty Storage Bag		
1	Rock Bag Wire Rope Dampener		

















• 20310
5" DIA LOOP

• 20311
8" DIA LOOP

• 20312
10" DIA LOOP

• 20379
13" DIA LOOP

>> ROPE SHACKLE

Part#	Description
20310	3/8" Rope Shackle, 26000 LBS BS, HMPE - YELLOW
20311	1/2" Rope Shackle, 38000 LBS BS, HMPE - RED
20312	5/8" Rope Shackle, 61750 LBS BS, HMPE - ORANGE
20379	9/10" Rope Shackle, 125000 LBS BS, HMPE - GREEN

The Rope Shackle is soft but super strong and flexible one piece design.
A quick, easy connector compared to the heavy steel shackles with threaded pin.

- Made from same durable material as synthetic winch rope
- Looped on one end, knotted on the other
- High visibility colors
- Flexible and easily wraps around anchor points
- Protective cover
- Floats
- NOTE: Do not use on sharp corners
- Sold individually



• 20441

>> RECEIVER MOUNT

Part#	Description
20441	Receiver Mount

- For Rope & Rope Shackles Up To 5/8"(15mm)
- Fits Most 2"x2" Receivers
- Smooth Chamferred Edge On Rope Hole
- 6061 Aluminum With Polished Finish

20 K LB	10 K LB
BREAKING STRENGTH	WORKING LOAD LIMIT

>> AR ROPE SHACKLE

Part#	Description
20393	10mm AR rope shackle, 30,000lbs BS, 8" loop, HMPE - Army Green
20422	10mm AR rope shackle, 30,000lbs BS, 20" loop, HMPE - Army Green
20394	12mm AR rope shackle, 45,000lbs BS, 10" loop, HMPE - Black
20423	12mm AR rope shackle, 45,000lbs BS, 20.75" loop, HMPE - Black



- Extreme Abrasion Resistant Woven Cover
- Reflective cover for easy night visibility
- Longer 26" Length / 8" Dia loop for easier attaching
- HMPE - same durable material as synthetic winch rope
- Looped on one end, knotted on the other
- Flexible and easily wraps around anchor points
- Protective cover
- Floats
- Note: Do not use on sharp corners / edges



• 20393
8" DIA LOOP

• 20422
20" DIA LOOP

• 20394
8" DIA LOOP

• 20423
20" DIA LOOP



>> 5/8" X 20'

BIG DOG RECOVERY ROPE

• 12,200LB BREAKING STRENGTH

Part#	Description
20317	Big Dog Recovery Rope

- Polyurethane dipped loops for durability
- High Quality- High Strength Nylon Fiber.
- 25% Stretch.
- Enables Smooth Recovery Between Two Vehicles.
- Kinetic Energy From Elasticity Aids Recovery
- Elasticity Reduces Possibility of Vehicle Damage

ATV'S

UTV'S

SIDE-BY-SIDES

POLYURETHANE DIPPED LOOPS





• 20317

Part#	Description
20232	Camo/Mesh Duffle Storage Bag

Includes:
CAMO/MESH STORAGE BAG

- Great For Storing/Carrying Straps & Ropes
- Approximate Size 16"L x 8" Dia
- Mesh Material Allows Wet Straps/ropes To Dry Out-reduces Mold

FREE



• 20232

>> 7/8" X 30'

BIG DOG RECOVERY ROPE

• 24,250LB BREAKING STRENGTH

Part#	Description
20231	Big Dog Recovery Rope

- High Quality- High Strength Nylon Fiber.
- 25% Stretch.
- Enables Smooth Recovery Between Two Vehicles.
- Kinetic Energy From Elasticity Aids Recovery
- Elasticity Reduces Possibility of Vehicle Damage

4 x 4'S

TRUCKS

JEEPS

SUV'S



• 20231

Part#	Description
20232	Camo/Mesh Duffle Storage Bag

Includes:
CAMO/MESH STORAGE BAG

- Great For Storing/Carrying Straps & Ropes
- Approximate Size 16"L x 8" Dia
- Mesh Material Allows Wet Straps/ropes To Dry Out-reduces Mold



• 20232

>> 1-1/4" X 30'

BIG DOG RECOVERY ROPE

• 45,000LB BREAKING STRENGTH

Part#	Description
20313	Big Dog Recovery Rope

POLYURETHANE DIPPED LOOPS



- Polyurethane dipped loops for durability
- High Quality- High Strength Nylon Fiber.
- 25% Stretch.
- Enables Smooth Recovery Between Two Vehicles.
- Kinetic Energy From Elasticity Aids Recovery
- Elasticity Reduces Possibility of Vehicle Damage

4 x 4'S

TRUCKS

JEEPS

SUV'S



• 20313

Part#	Description
20337	Camo/Mesh Duffle Storage Bag

Includes:
CAMO/MESH STORAGE BAG

- Great For Storing/Carrying Straps & Ropes
- Approximate Size 26.77"L x 10.6" Dia
- Mesh Material Allows Wet Straps/ropes To Dry Out-reduces Mold



• 20337

>> 1-1/2" X 30'

BIG DOG RECOVERY ROPE

• 63,000LB BREAKING STRENGTH

Part#	Description
20314	Big Dog Recovery Rope

- Polyurethane dipped loops for durability
- High Quality- High Strength Nylon Fiber.
- 25% Stretch.
- Enables Smooth Recovery Between Two Vehicles.
- Kinetic Energy From Elasticity Aids Recovery
- Elasticity Reduces Possibility of Vehicle Damage

POLYURETHANE DIPPED LOOPS



WORK TRUCKS
- HEAVY EQUIPMENT



• 20314

Part#	Description
20337	Camo/Mesh Duffle Storage Bag

- Great For Storing/Carrying Straps & Ropes
- Approximate Size 26.77"L x 10.6" Dia
- Mesh Material Allows Wet Straps/rope

Includes:
CAMO/MESH STORAGE BAG



• 20337

>> 2" X 30'

BIG DOG RECOVERY ROPE

• 125,000LB BREAKING STRENGTH

Part#	Description
20378	Big Dog Recovery Rope

POLYURETHANE DIPPED LOOPS



- Polyurethane dipped loops for durability
- High Quality- High Strength Nylon Fiber.
- 25% Stretch.
- Enables Smooth Recovery Between Two Vehicles.
- Kinetic Energy From Elasticity Aids Recovery
- Elasticity Reduces Possibility of Vehicle Damage

HEAVY WORK TRUCKS
* FARM EQUIPMENT



• 20378

Part#	Description
20388	Camo/Mesh Duffle Storage Bag

Includes:
CAMO/MESH STORAGE BAG

- Great For Storing/Carrying larger Straps & Ropes
- Approximate Size 24"L x 11" Dia
- Mesh Material Allows Wet Straps/ropes To Dry Out-reduces Mold



• 20388

>> RECOVERY/WINCH EXTENSION STRAPS

Part#	Description	Breaking Strength	WLL
20029	2" x 20'	20K	6.7K
20014	2" x 30'	20K	6.7K
20030	3" x 30'	30K	10K
20031	4" x 30'	40K	13.3K
20032	6" x 30'	60K	20K

- High quality, high capacity, heavy-duty polyester strap.
- Includes sewn-in tie cord for storage.
- Very low stretch (<5%).
- End loops are reinforced.



• 20029/20014/20030



• 20031/20032

>> TREE SAVERS

Part#	Description	Breaking Strength	WLL
20051	2"x8'	8.8K	2. 9K
20015	3"x10'	30K	10K
20033	3" x 6'	30K	10K

- High quality, high capacity, heavy-duty polyester strap.
- Protects tree while providing a strong anchor point.
- Includes sewn-in tie cord for storage.
- Very low stretch (<5%).
- End loops are reinforced.



• 20015/20033

>> SNATCH STRAP

Part#	Description	Breaking Strength	WLL
20134	3"x30'	19.8K	10K

- Kinetic energy from elasticity aids recovery.
- Elasticity reduces possibility of vehicle damage.
- High strength nylon fiber with approximately 25% stretch.
- Designed to stretch under load.
- Enables smooth recovery between two vehicles.
- Includes sewn-in tie cord for storage.
- End loops are reinforecd.



• 20134

The Strap Story
Most companies selling straps design their straps and make capacity claims based on the Breaking Strength of the webbing. The Working Load Limit, which is most important to the end user, is calculated as 1/3 of the Breaking Strength. Example: A strap with 30,000lb Breaking Strength has a Working Load Limit of 10,000lb and the end user should buy it and use it based on the 10,000lb rating.



Gray Area
Breaking Strength of the webbing is NOT the same as Breaking Strength of the strap assembly. Most straps have loops sewn into the ends for easy attaching. Once you sew into the webbing the sewn connection is not as strong as the webbing itself. Some companies continue to make Breaking Strength claims based on the webbing even though the end user gets the sewn assembly. Therefore the true Breaking Strength and Working Load Limit of the strap assembly are actually lower than the claim. ***BULLDOG WINCH*** does not play this game. All our Breaking Strength claims are made based on our sewn assembly. What does this mean: 1) you get what you really pay for 2) high quality and safe product.

Testing
An example of ***BULLDOG WINCH*** Break Strength testing vs some competitors are demonstrated on our website. We love to break our straps and the competitor's straps and see what the true breaking strength is. For more information and test results go to: http://bulldogwinch.com/straps.

>> CHAIN



• 20076

Part#	Description	Grade	Breaking Strength	WLL LBS
20076	5/16" x 10'(8mm x 3m)	G70	18, 800	4700

- Used to hook to another vehicle or sharp objects to create an anchor point.
- Never use a chain on a tree.
- Chains can severely damage or kill trees!

>> HOOK



• 20017

Part#	Description
20017	2" hitch receiver mount recovery hook, 10, 000lb (4535kg) capacity

- Great anchor points to add to the vehicle.
- WLL = maximum load capacity of vehicle receiver

>> SYNTHETIC ROPE EXTENSION



• 20390

PART#	Size	Breaking Strength
20390	10mm x 50ft	20000lb

- Extends winch line by 50ft
- Helps reach and connect stranded vehicles to far way anchor points.
- Lightweight-saves weight vs steel
- Stronger than steel on weight for weight basis
- Safer than steel-stores less kinetic energy
- Easy to handle no sharp strands

>> 1-1/4" - CLASS I & II

Part#	Description
20239	1-1/4" receiver mount shackle

- Fits Most 1-1/4" Receivers Class I & II.
- 3500lb Working Load Limit Or Vehicle's Receiver Capacity - Whichever Is Lower.
- Solid Steel Mount For Strength & Durability.
- Provides A Good Attachment Point.
- Multiple Pin Holes Allow Shackle To Be Used. Horizontally Or Vertically And Fit Most Receivers.



• 20239

>> 2" - CLASS III & IV

Part#	Description
20037	3/4" receiver mount shackle

- Fits all 2x2" receivers.
- Provides a good attachment point.
- Hitch pin not included.
- WLL = maximum load capacity of vehicle receiver.
- Solid steel body-no tubing.
- Cross-drilled to use shackle vertically or horizontally.



• 20037

>> 2.5" - CLASS V

Part#	Description
20186	7/8" receiver mount shackle

- Fits class V receivers with 2.5"x2.5" tube
- CNC solid steel mount
- Zinc plated shackle
- Nickle plated mount



• 20186

>>BIG DOG SHACKLE

Part#	Description
20181	Big Dog Shackle - 1-1/2"

- Huge oversize shackle for that big truck look
- Fits 2"x2" receivers
- Great for work trucks that use big straps etc
- Zinc plated shackle
- Nickle plated mount
- Great For Farming, Oil Rigs, Mining, Logging Etc



• 20181





20181 ON LIFTED H2





20181 ON LIFTED SUPER DUTY

>> BIG DOG HOOK

Part#	Description
20182	Big Dog Hook - 2″x 2″ Receiver Mount-Black

- Forged High Strength Steel Hook For Strength
- Spring Loaded Clasp For Securing Straps/Ropes
- Large Oversize Hook Makes It Easier To Use Large Ropes And Straps
- Easy On And Off
- Great For Farming, Oil Rigs, Mining, Logging Etc



• 20182

10 KLB BREAKING STRENGTH	3.3 KLB WORKING LOAD LIMIT

>> 2"X8' 10,000 LB. RATCHETING TIE-DOWN STRAP W/TWISTED SNAP HOOKS

Part#	Description
20325	Ratcheting Tie-Down strap

- 10,000lb breaking strength.
- 3,335lb working load limit.
- Ratchet with short fixed hook makes it easier to tie down lower vehicles
- Shorter 8' length to minimize excess tie-offs
- No-stretch high strength polyester webbing
- Wide ergonomic contour ratchet handle



HEAVY-DUTY
TWIST HOOKS



HEAVY DUTY RATCHET
W/ERGO HANDLE
HOOK #20324 ON END OF RATCHET - POSITIONS
RATCHET AT TRAILER & NOT UNDER VEHICLE

• 20325

>> 2" X 36' 10,000LB AXLE STRAP WITH PROTECTIVE SLEEVE

Part#	Description
20326	Axle Strap With Protective Sleeve

- 10,000LB breaking strength
- 3,335lb Working Load Limit
- No-stretch high strength polyester webbing
- Protective webbing sleeve for wrapping axle/securing part



• 20326

>> PADDED AXLE STRAP COVER

Part#	Description
20327	Padded Axle Strap Cover

- Used with 20326 to secure vehicle
- With extra protection
- Great for securing through wheels
- Wraps around 20326 2" x 36' axle strap with hook & loop closure
- Set of 2pcs







• 20327

>> STORAGE CINCH STRAP

Part#	Description
20338	Storage Cinch Strap

- Secure your straps for storage
- Also great for securing the loose ends during transport
- Hook & loop closure wraps from 2" to 5" dia approximately
- Wraps around 20326 2" x 36' axle strap with
- Set of 4pcs





• 20338

GREAT FOR LOW PROFILE VEHICLES



10 KLB BREAKING STRENGTH	3.3 KLB WORKING LOAD LIMIT

>>9PC RATCHETING TIE-DOWN STRAP KIT

Part#	Description
20349	9PC Ratcheting Tie-down Strap Kit

- Great for securing low vehicles to trailers
- Great for race cars & show cars
- Set of 4 2"x8ft 10,000lb breaking strength, 3,335lb working load limit.
- Heavy duty storage bag.

HOOK ON END OF RATCHET - POSITIONS RATCHET AT TRAILER & NOT UNDER VEHICLE

INCLUDES:



Heavyy Duty Storange Bag 100lb Capacity, W/multiple Pockets



Heavy Duty Ratchet W/Ergo Handle Hook #20324 On End Of Ratchet - Positions Ratchet At Trailer & Not Under Vehicle



Heavy-duty Twist Hooks



4pcs Storage Cinch Strap



Cinch Straps Are Great For Storage Or Tying Off Excess During Use

GREAT FOR ALL KINDS OF VEHICLES



>>13PC RATCHETING TIE-DOWN STRAP KIT

Part#	Description
20350	13PC Ratcheting Tie-down Strap Kit

- Great for securing low or lifted vehicles to trailers
- Great for race cars, show cars, and also lifted off-road vehicles
- Set of 4 - 2"x8ft 10,000lb breaking strength, 3,335lb working load limit
- Set of 4 - 2"x36" alxe strap with protective sleeve -10,000lb breaking strength, 3,335lb working load limit
- Set of 4 - storage cinch straps
- Heavy duty storage bag.

HOOK ON END OF RATCHET - POSITIONS RATCHET AT TRAILER & NOT UNDER VEHICLE

INCLUDES:



Heavyy Duty Storange Bag 100lb Capacity, W/multiple Pockets



Heavy Duty Ratchet W/ergo Handle Hook #20324 On End Of Ratchet - Positions Ratchet At Trailer & Not Under Vehicle



Heavy-duty Twist Hooks



4pcs 2" X 36" Alxe Strap With Protective Sleeve



4pcs Storage Cinch Strap



Cinch Straps Are Great For Storage Or Tying Off Excess During Use

10 KLB BREAKING STRENGTH	3.3 KLB WORKING LOAD LIMIT

>>17 PC RATCHETING TIE-DOWN STRAP KIT

Part#	Description
20351	17PC Ratcheting Tie-down Strap Kit

- Great for securing show cars to trailers
- Great for race cars & show cars
- Set of 4 - 2"x8ft 10,000lb breaking strength, 3,335lb working load limit
- Set of 4 - 2"x36" alxe strap with protective sleeve -10,000lb breaking strength, 3,335lb working load limit
- Set of 4 - Axle strap covers
- Set of 4 - storage cinch straps
- Heavy duty storage bag.

GREAT FOR SHOW VEHICLES



INCLUDES:



Heavyy Duty Storange Bag
100lb Capacity,
W/multiple Pockets



Heavy Duty Ratchet
W/ergo Handle
Hook #20324 On End Of Ratchet - Positions Ratchet At Trailer & Not Under Vehicle



Heavy-duty
Twist Hooks



Cinch Straps Are Great
For Storage Or Tying Off
Excess During Use



4pcs 2" X 36" Alxe Strap
With Protective Sleeve



4pcs Axle Strap Cover



4pcs Storage
Cinch Strap

10 KLB BREAKING STRENGTH	3.3 KLB WORKING LOAD LIMIT

>>2"X10' 10,000 LB. RATCHETING AXLE TIE-DOWN STRAP W/TWISTED SNAP HOOKS

Part#	Description
20229	Ratcheting Axle Tie-Down strap

- 10,000lb Breaking Strength.
- 3,335lb Working Load Limit.
- Combination Axle Strap & Ratchet Strap into one assembly
- No-Stretch high strength polyester webbing
- Webbing Gel-treated to resist abrasion.
- Protective webbing sleeve for wrapping axle/securing part
- Adjustable loop diameter
- Wide Ergonomic Contour Ratchet Handle





BULIT-IN AXLE LOOP WITH PROTECTION SLEEVE



BUILT IN D-RING SECURE POINT



HEAVY DUTY RATCHET W/ERGO HANDLE




HEAVY-DUTY TWIST HOOKS

10 KLB BREAKING STRENGTH	3.3 KLB WORKING LOAD LIMIT

>> 5PC Ratcheting Axle Strap Kit

Part#	Description
20230	5PC Ratcheting Axle Strap Kit

- Great For Securing Vehicles To Trailers.
- Set Of 4 2"x10ft 10,000lb Breaking Strength, 3,335lb Working Load Limit.
- Heavy Duty Storage Bag.

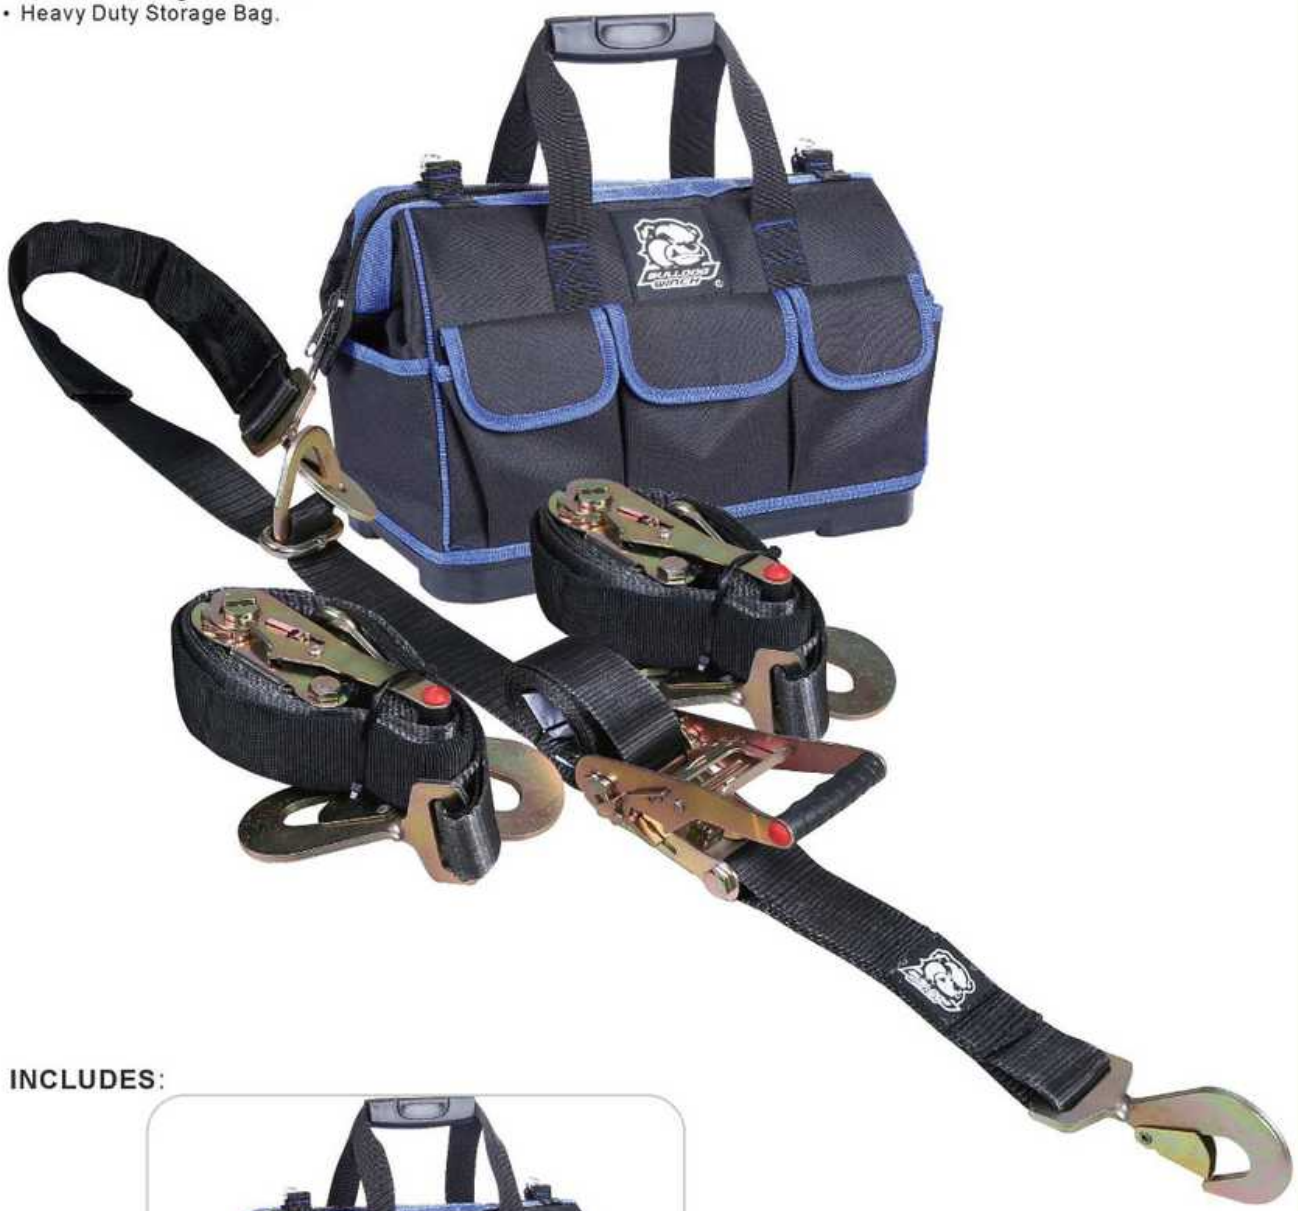

INCLUDES:



HEAVYY DUTY STORANGE BAG
100LB CAPACITY,
W/MULTIPLE POCKETS

10 KLB BREAKING STRENGTH	3.3 KLB WORKING LOAD LIMIT

>>VERTICAL TIRE RATCHETING TIE-DOWN STRAP

Part#	Description
20362	Vertical Tire ratcheting tie-down strap

- "H" configuration for extra wide tires.
- 10,000lb Breaking Strength
- 3,335lb working load limit.
- Great for extra wide tires/race tires.

• 20362



HEAVY DUTY RATCHET W/ERGO HANDLE HOOK #20324 ON END OF RATCHET



RETAINER STRAP KEEPS MIDDLE FROM SPREADING UNDER LOAD.



HEAVY-DUTY HOOKS



STEEL SPREADER BARS



HEAVY DUTY RATCHET

6 KLB BREAKING STRENGTH	2 KLB WORKING LOAD LIMIT

>>SPARE TIRE RATCHETING HOLD-DOWN STRAP

Part#	Description
20363	Spare tire ratcheting hold-down strap

- "Y" configuration to secure the spare laying down
- 6,000lb Breaking Strength.
- 2,000lb Working Load Limit.
- Adjustable to fit most larger spares - truck & race tires





• 20363



HEAVY-DUTY HOOKS



HEAVY DUTY RATCHET



ADJUSTER BUCKLES TO ADJUST FOR SIZE OF TIRE

MESH CARGO NET

- Heavy-duty mesh material for containing light weight cargo.
- Prevents debris from blowing out.
- Webbing edging for strength
- Grommets and rings for strong tie-down points.





Perimeter stretch cord with nylon hooks.

>> 6' X 6'


Part#	Description
20409	6' x 6' mesh cargo net

- Includes 4pcs 40" cambuckle tie down straps.

NEW







- 20409



4pcs 40" cambuckle tie down straps



Storage Bag



Perimeter stretch cord with 24pcs nylon hooks



PVC Zipper Storage Bag

>> 6' X 8'

Part#	Description
20410	6' x 8' mesh cargo net

• Includes 4pcs 40" cambuckle tie down straps.



NEW



• 20410



4pcs 40" cambuckle tie down straps



Storage Bag



Perimeter stretch cord with 24pcs nylon hooks



PVC Zipper Storage Bag

>> 8' X 12'

Part#	Description
20411	8' x 12' mesh cargo net

• Includes 6pcs 40" cambuckle tie down straps.



NEW



• 20411



6pcs 40" cambuckle tie down straps



Storage Bag



Perimeter stretch cord with 24pcs nylon hooks




PVC Zipper Storage Bag

CARGO RESTRAINT SYSTEM

>> 4.6' X 6'

Part#	Description
20412	4.6' x 6' cargo restraint system

- 1" webbing with 2200LB breaking strength
- Box and cross-stitched joints for extra strength
- 8 tie-down points with ratcheting straps and wire hooks
- Great for short bed pickups

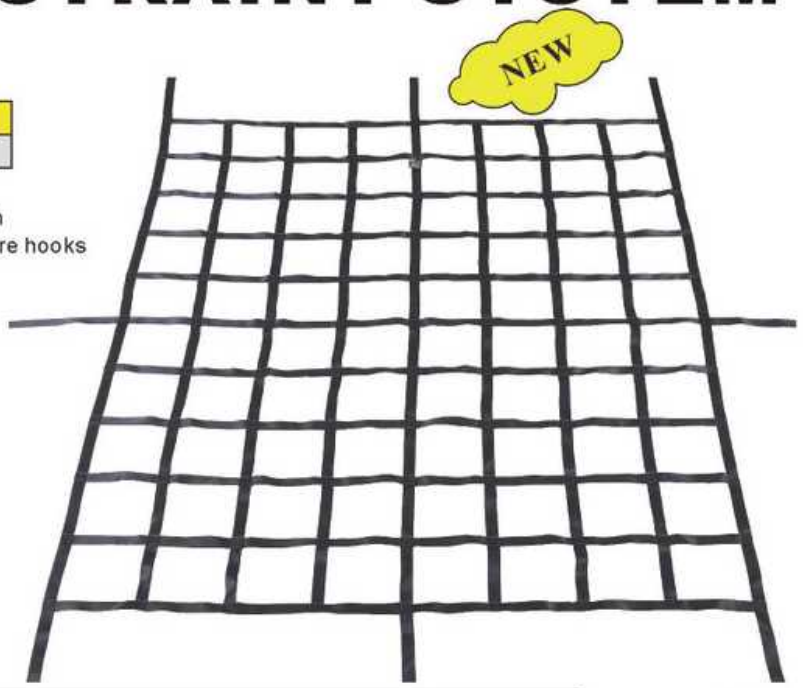


• 20412



>> 6' X 8'
Cargo Restraint System

Part#	Description
20413	6' x 8' cargo restraint system

- 1" webbing with 2200LB breaking strength
- Box and cross-stitched joints for extra strength
- 8 tie-down points with ratcheting straps and wire hooks
- Great for long bed pickups

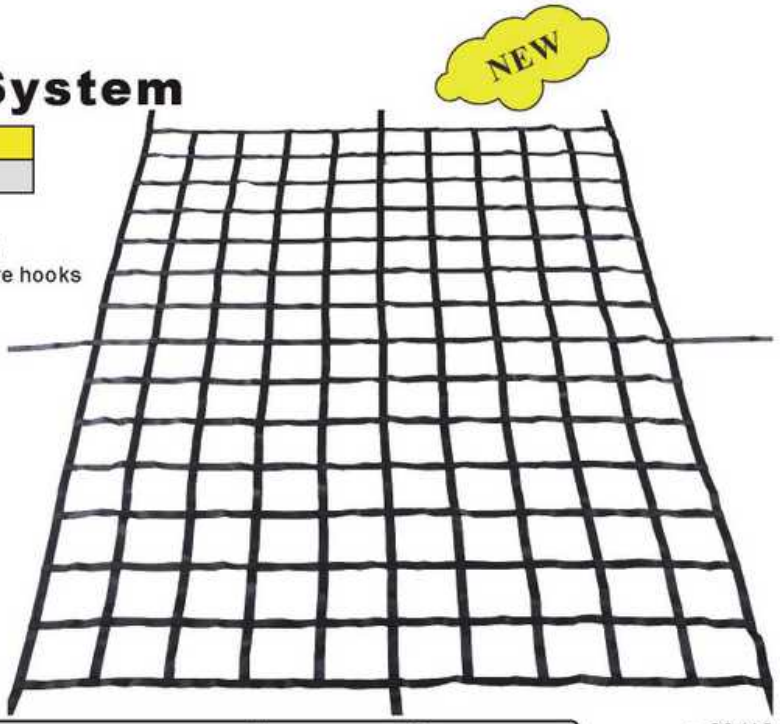


• 20413



>> 8' X 12'
Cargo Restraint System

Part#	Description
20414	8' x 12' cargo restraint system

- 1" webbing with 2200LB breaking strength
- Box and cross-stitched joints for extra strength
- 10 tie-down points with ratcheting straps and wire hooks
- Great for trailers

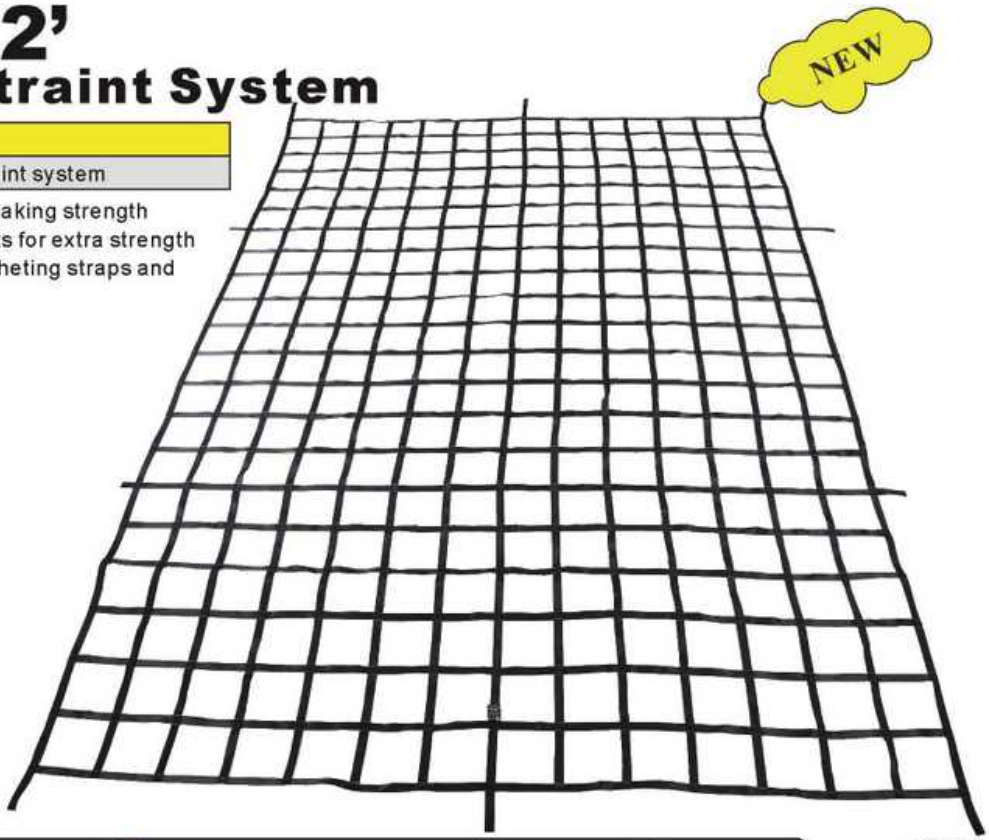

• 20414







• 20199/20200

>> AR SYNTHETIC ROPE

PART#	Size	Breaking Strength
20200	9mm x 100ft	11800lb
20199	9.5mm x 100ft	13200lb

Abrasion Resistant Winch Line With Braided Cover Prevents Grit&dirt From Damaging Core

- Heavy Duty Stainless Tube Thimble
- 6ft abrasion guard
- Lightweight-saves weight vs steel
- Stronger than steel on weight for weight basis
- Safer than steel-stores less kinetic energy
- Easy to handle no sharp strands
- Easier to spool

>> SYNTHETIC ROPE

PART#	Size	Breaking Strength	FITS
20185	4.8mm x 50ft	4900lb	For up to 3K Winch
20185O	4.8mm x 50ft	4900lb	For up to 3K Winch - Orange Color
20095	6mm x 50ft	7700lb	For up to 4K Winch
20226	8mm x 50ft	12300lb	For up to 8K Trailer Winch - With Hook
20321	8mm x 100ft	12300lb	For up to 8K Winch
20124	9mm x 75ft	17600lb	For up to 9.5K Trailer Winch
20322	9mm x 100ft	17600lb	For up to 9.5K Winch
20323	10mm x 90ft	22000lb	For up to 12K Winch
20288	12mm x 80ft	30600lb	For up to 15K Winch

Lines are made with high quality high molecular polyethylene (HMPE) fibers that are:

- Lightweight.
- Stronger than steel on weight for weight basis.
- Safer than steel – stores less kinetic energy.
- Easy to handle – no sharp strands.
- Easier to spool.
- Higher breaking capacity line spec.



• 20095/20185



• 20185O



• 20226/20321/20124/ 20322/20323/20288



• 20434

>> SNOW PLOW WINCH ROPE

Part#	Description
20434	6mm x 12ft ATV/UTV Universal replacement

- Soft loop for plow attachment
- Small loop for drum attachment
- Alternative drum attaching methods can be used.

Bulldog Synthetic Winch Lines are made with high-quality.high-molecular polyethelene (HMPE) fibers that are:

- Stronger than steel on weight for weight basis
- Safer than steel-stores less kinetic energy
- Easy to handle no sharp strands
- Easier to spool

>> WINCH STRAP

Part#	Description
20225	1.5"x30" Winch strap, polyester material
20225N	1.5"x30" Winch strap, nylon material

• OE replacemet strap for 15021 snow plow winch



• 20225/20225N

>> SYNTHETIC ROPE EXTENSION

PART#	Size	Breaking Strength
20390	10mm x 50ft	20000lb

• Extends winch line by 50ft
• Helps reach and connect stranded vehicles to far way anchor points.
• Lightweight-saves weight vs steel
• Stronger than steel on weight for weight basis
• Safer than steel-stores less kinetic energy
• Easy to handle no sharp strands



• 20390

>> TUBE THIMBLE - REPLACEMENT

Part#	Description
20293	Stainless Steel Tube Thimble, 8mm ID - Ideal for 6mm rope
20092	Stainless Steel Tube Thimble,10mm ID - Ideal for 8mm rope
20093	Stainless Steel Tube Thimble,12mm ID - Ideal For Up To 10mm Rope
20294	Stainless Steel Tube Thimble,15mm ID - Ideal For Up To 12mm Rope



• 20293/20092/20093/20294



>> WIRE ROPE

PART#	MM	SAE	FITS
20102	4.0mm x 15.2m	5/32" x 50'	OE Replacement for Bulldog 15001 2K & 15008 2K - Includes hook
20385	4.8mm x 15.2m	3/16" x 50'	OE Replacement for Bulldog 12001 1200LB 12Vdc Hoist - Includes hook
20106	4.8mm x 15.2m	3/16" x 50'	OE Replacement for Bulldog 15006 2.5K
20103	4.8mm x 12.2m	3/16" x 40'	OE Replacement for Bulldog 15002 3K
20222	5.0mm x 13.7m	3/16" x 45'	OE Replacement for Bulldog 15017 3.4K
20223	5.4mm x 17m	7/32" x 55.7'	OE Replacement for Bulldog 15019 4.4K
20104	5.4mm x 16.8m	7/32" x 55'	OE Replacement for Bulldog 15004 4K
20105	5.4mm x 15.2m	7/32" x 50'	OE Replacement for Bulldog 15005 3.5K
20250	6.4mm x 16.8m	1/4" x 55'	OE Replacement for Bulldog 15022 6K
20213	7.2mm x 16.8m	9/32" x 55'	OE Replacement for Bulldog 10029 5.8K
20111	7.2mm x 25.9m	9/32" x 85'	OE Replacement for Bulldog 10004 6K
20214	8.1mm x 14.5m	5/16" x 47.6'	OE Replacement for Bulldog 10031 7.8K
20108	8.1mm x 30.5m	5/16" x 100'	OE Replacement for Bulldog 10001, 10041 8K
20109	8.3mm x 30.5m	21/64" x 100'	OE Replacement for Bulldog 10002, 10042 9.5K, 10013 9.3K
20392	9.1mmx15m	9/25"x50'	OE Replacement for Bulldog 10061 9.8K
20112	9.1mm x 26.5m	9/25" x 87'	OE Replacement for Bulldog 10005 10K
20202	9.5mm x 26m	3/8" x 85'	OE Replacement for Bulldog 10027 12.5K
20110	9.5mm x 27.4m	3/8" x 90'	OE Replacement for Bulldog 10003, 10043 12K
20296	11mm x 26m	7/16" x 85'	OE Replacement for Bulldog 10047 15K
20143	12mm x 28m	15/32" x 92'	OE Replacement for Bulldog 10012 15K & 10057 16.5K
20397	13mm x 25m	1/2" x 85.3'	OE Replacement for Bulldog 10059 18.5K
20430	14mmx48m	35/64"x157.5'	OE Replacement for Bulldog 11004 20K



• 20273/20274



• 20118



• 20121

>> SLING HOOK

Part#	Description
20273	8mm Sling Hook, 17600lb BLS
20118	Sling Hook 3/8" Crmo With Heavy Duty Clasp - Safety Orange, 28000lb BLS
20274	Sling Hook 3/8" Crmo With Heavy Duty Clasp - Silver Zinc, 28000lb BLS

- Heavy duty hook.
- Great for use with synthetic rope
- Chrome moly steel for strength & durability

>> HOOK

Part#	Description
20119	1/4" Hook
20120	5/16" Hook
20121	3/8" Hook
20122	7/16" Hook
20123	1/2" Hook

- Forged alloy steel hooks with clasp g70



• 20282

>> HAND SAVER STRAP

Part#	Description
20282	Hand Saver Strap

- Helps keep hand clear of moving spool.



• 20278





>> LICENSE PLATE BRACKET - FAIRLEAD MOUNT

Part#	Description
20278	License Plate Bracket - Fairlead Mounting

- Fits most truck roller fairleads
- Slotted screw holes provide some fitment adjustment
- New stainless wire security tether to attach to fairlead mounting bolt





• 20391

>> LICENSE PLATE FOR HAWSE FAIRLEAD

Part#	Description
20391	License Plate for hawse fairlead

- Provides front plate mounting solution.
- Uses 10" OC fairlead mounting behind/with fairlead.
- Steel mount with durable e-coating and powder coat.

>> TENSIONERS

Part#	Description
20234	Tensioner For Standard Series Truck Winch
20147	Tensioner For 10012 15K HD Winch
20402	Tensioner For 10057-16.5K & 10059-18.5K Winch
20427	Tensioner For 11002 15K HD Winch

- Helps Make Handling & Management Of Wire Rope Easier
- Prevents Accidental Unspooling
- Great For Hidden Mounting Locations



• 20234



• 20147



• 20402/20427

>> ROLLER FAIRLEADS

Part#	Mounting Bolt Pattern OC		Working Hole Dimensions LxH	Finish	OE Winches
	IN	MM			
20022	8	203.2	10*136mm	Gloss Black	10004, 10061
30003	10	254	20*200mm	Gloss Black	8K-12K winch
30003T	10	254	20*200mm	Texture Black	8K-12K winch
20002	10	254	16*190mm	Zinc Plated	8K-12K winch
20145	10	254	19*185mm	Gloss Black	10012
20395	10	254	19*185mm	Gloss Black	15K-18.5K winch, Stainless Steel Rollers
20429	14.5	368.5	22*280mm	Gloss Black	11004 20K



• 20022/30003



• 30003T



• 20002



• 20395



• 20145



• 20429

>> HAWSE FAIRLEADS - ALUMINUM

Part#	Mounting Bolt Pattern OC		Working Hole Dimensions LxH	Finish	OE Winches
	IN	MM			
20089	4.82	122.5	18x64mm	Black	15010, 15011, 15013, 15014, 10030,10032
30006	5.95	151	19*110mm	Polished	15020
20090	6.48	164.5	18x116mm	Black	15012, 15023
20087	8	203.2	23.5x127mm	Black	10062
30004	10	254	23.5x185mm	Polished	8-18.5K winch
20085	10	254	23.5x185mm	Black	8-18.5K winch
20086	10	254	23.5x127mm	Black	10009
20419	10	254	23.5x127mm	Black	



• 20089



• 30004



• 30006



• 20085/20087



• 20090



• 20086



• 20419





>> ROLLER FAIRLEADS

Part#	Mounting Bolt Pattern OC		Working Hole Dimensions LxH	Finish	OE Winches
	IN	MM			
20001	4.3	109	18*72mm	Gloss Black	15001,15002 early production
20055	4.82	122.5	14*85mm	Gloss Black	15001,15002,15005,15006 current, 10029,10031
20055T	4.82	122.5	14*85mm	Textured Black	10029, 10031
20280	5.95	151	14*93mm	Gloss Black	15019(SQUARE SHANK MNT HOLES)
20059	6.5	165	12*125mm	Gloss Black	15004
20059G	6.5	165	12*125mm	Gloss Grey	15022



· 20055



· 20059

>> HAWSE FAIRLEADS - CAST IRON

Part#	Mounting Bolt Pattern OC		Working Hole Dimensions LxH	Finish	OE Winches
	IN	MM			
20224	4.82	122.5	19*64mm	Gloss Black	15018
20003	10	254	26*199mm	Gloss Black	N/A



· 20224



• 20003

>> SOFT WINCH COVER

Part#	Description
20432	Acrylic Winch Cover For 10057,10058, 10059,10060

- Keeps winch protected from the elements
- Elastic bottom seam secures cover under motor and gear housings





• 20432

Front Rope slot with hook and loop closure

>> SOFT WINCH COVER

Part#	Description
20433	Acrylic Winch Cover For 10063&10064

- Keeps winch protected from the elements
- Elastic bottom seam secures cover under motor and gear housings





• 20433

Front Rope slot with hook and loop closure



- 20046

Front Rope slot with hook and loop closure

>> SOFT WINCH COVER

Part#	Description
20046	Truck Acrylic Winch Cover

- Keeps winch protected from the elements
- Elastic bottom seam secures cover under motor and gear housings
- Fits Bulldog Winch truck winches with power unit over drum





- 20407

Front Rope slot with hook and loop closure

>> SOFT WINCH COVER

Part#	Description
20407	Acrylic Winch Cover For 10039&10040

- Keeps winch protected from the elements
- Elastic bottom seam secures cover under motor and gear housings
- Fits Bulldog Winch 10039 & 10040 winches.





>> WINCH COVER TRUCK NEOPRENE PU OVER MOTOR

Part#	Description
20190	Truck Neoprene Winch Cover

- Keeps Winch Protected From The Elements.
- Stretches For Snug Fit.
- Fits Bulldog Winch Truck Winches With Power Unit Over Motor.
- For Extended UV Resistance We Recommend Use Of 303 Aerospace Protectant www.goldeagle.com



Front Rope slot with hook and loop closure

>> WINCH COVER TRUCK NEOPRENE PU OVER DRUM

Part#	Description
20191	Truck Neoprene Winch Cover

- Keeps winch protected from the elements.
- Stretches for snug fit.
- Fits BULLDOG WINCH truck winches with power unit over Drum.
- For Extended UV Resistance We Recommend Use Of 303 Aerospace Protectant www.goldeagle.com


Front Rope slot with hook and loop closure

>> SOFT WINCH COVER

Part#	Description
20380	Acrylic Winch Cover For 15017&15018
20381	Acrylic Winch Cover For 15019&15020

- Keeps winch protected from the elements
- Elastic bottom seam secures cover under motor and gear housings



Front Rope slot with hook and loop closure



Front Rope slot with hook and loop closure

Part#	Description
20192	Winch cover neoprene powersports side drum 15001,15002,15008,15010,15011
20193	Winch cover neoprene powersports center drum 15004,15005,15006,15012,15013,15014

- Keeps winch protected from elements
- Durable long lasting neoprene material
- Stretches for snug fit




• 20192


• 20193

SWITCH DISPLAYERS

- Priced at a discount for 18 switches you will receive 18 switches plus the pre-wired displayer with the display switches and power adapter
- Displayer can stand on a counter or hang on pegboard/slat wall
- Customers can preview and try out the lighted switches

>> ROCKER SWITCH DISPLAY

Part#	Description
60002	Rocker Switch Display

Pre-pack Includes 18 Switches, Power Adapter & Display Rack with 6 Display Switches.

20255	"WHITE" ON/OFF 5-Pin W/Barriers Rocker Switch	3
20256	"RED" ON/OFF 5-Pin W/Barriers Rocker Switch	3
20257	"GREEN" ON/OFF 5-Pin W/Barriers Rocker Switch	3
20258	"BLUE" ON/OFF 5-Pin W/Barriers Rocker Switch	3
20259	"AMBER" ON/OFF 5-Pin W/Barriers Rocker Switch	3
20284	"RED" Momentary (ON)-OFF 3-Pin W/Barriers Rocker Switch	3









SWITCH DISPLAYERS

- Priced at a discount for 18 switches you will receive 18 switches plus the pre-wired displayer with the display switches and power adapter
- Displayer can stand on a counter or hang on pegboard/slat wall
- Customers can preview and try out the lighted switches

>> SPECIALTY ROCKER SWITCH DISPLAY

Part#	Description
60003	Specialty Rocker Switch Display

Pre-pack Includes 18 Switches, Power Adapter & Display Rack with 6 Display Switches.

20260	"WHITE" ON/OFF 5-Pin "LED LIGHT BAR"	6
20261	"WHITE" Momentary ON-Center OFF-Momentary ON "WINCH IN-OUT"	3
20262	"RED" ON/OFF "WINCH ON/OFF"	3
20319	"RED" ON/OFF "DC POWER PLUG"	3
20364	"WHITE" ON/OFF "AIR COMPRESSOR"	3









STRAPS & ROPES DISPLAYER

- This eye-catching full color floor display will call attention to our color coded recovery straps and ropes. Stretch, No-Stretch, Tree-Saver, and Kinetic Ropes are all available in different versions using this display.
- It measures 15x25" footprint and just over 4' high.
- We ship the product in two cartons and the displayer in a separate carton.
- The displayer takes an easy 10 minutes to assemble!!
- This great looking display will be sure to increase sales on this highly consumable recovery category.



STRAPS & ROPES DISPLAYER

Part#	Description
60004	Recovery Strap Displayer with Snatch Strap – Assortment-A

Regular Jobber =$657.36

Special Jobber =$589

Includes:

20015	3"x10' 30,000lb BLS tree saver strap	3
20029	2"x20' 20,000lb BLS recovery/winch extension strap	4
20030	3"x30' 30,000lb BLS recovery/winch extension strap	3
20134	3"x30' 19,800lb BLS snatch strap	3



Part#	Description
60005	Recovery Strap Price Point - Assortment-B

Regular Jobber =$611

Special Jobber =$549

Includes:

20014	2"x20' 20,000lb BLS recovery/winch extension strap	4
20015	3"x10' 30,000lb BLS tree saver strap	3
20029	2"x20' 20,000lb BLS recovery/winch extension strap	4
20030	3"x30' 30,000lb BLS recovery/winch extension strap	3



Part#	Description
60006	Recovery Strap Heavy-Duty - Assortment-C

Regular Jobber =$770.56

Special Jobber =$693

Includes:

20030	3"x30' 30,000lb BLS recovery/winch extension strap	4
20031	4"x30' 40,000lb BLS recovery/winch extension strap	3
20032	6"x30' 60,000lb BLS recovery/winch extension strap	2



Part#	Description
60007	Recovery Strap & Rope - Assortment-D

Regular Jobber =$728.39

Special Jobber =$655

Includes:

20029	2"x20' 20,000lb BLS recovery/winch extension strap	4
20030	2"x30' 20,000lb BLS recovery/winch extension strap	3
20231	7/8"x30' 24,280lb BLS big dog recovery rope	4





* Wire Grid is an add-on #90079

>> MERCHANDISERS

Part#	Description
90220	Winch Displayer, 3-Truck / 1-Powersports
90221	Winch Displayer, 2-Truck / 2-Powersports
90222	Winch Displayer, 4-Truck
90223	Winch Displayer, 5-Powersports
90224	Winch Displayer, 3-Truck
90294	Winch Displayer, 2-Truck / 1-Powersports
60001	Winch Displayer, Jobber Accessory Pack



>> DISPLAYERS

Part#	Description
90149	Big Dog Displayer

• Displays 20181 or 20182



>> BANNER

Part#	Description
90005	24" x 36" Banner
90006	34" x 72" Banner

- 4 color printing with UV protective ink
- Vinyl material, brass grommets on corners and middle of long edges



>> WIRE RACK HEADER SIGN CARD

Part#	Description
90086	Displayer Header Card - OFF-Road
90344	Displayer Header Card - Trailer Winches

- 4 color printing on both sides
- Laminated to plastic foam core





>> STICKER

Part#	Description
90034	4" Bulldog Winch Sticker

- Vinyl with UV protectant



PART PAGE

Part #	Page #'s
10009	10
10029	20
10030	20
10031	19
10032	19
10039	17
10040	17
10041	9
10044	9
10047	6
10048	6
10057	3,4
10058	3,4
10059	3,4
10060	3,4
10061	18
10062	18
10063	5
10064	5
10065	7
10066	7
10067	8
10068	8
11002	11
11004	12
12001	32
12002	32
12003	31
12004	31
15001	30
15002	29
15004	26
15005	27
15006	28
15008	24
15010	30
15011	29
15012	26
15013	27
15014	28
15017	22
15018	22
15019	21
15020	21
15021R2	23
15022	25
15023	25
15101	44
15102	45,46
15103	44
15104	45
15105	44
15106	47
15107	44
15108	43,44
15109	43
15110	48
15111	48
15112	46
15113	43,44
15114	44
15115	44
15116	43,44
15117	44
15119	44
15120	44
15121	47

Part #	Page #'s
15122	47
15123	44
15125	44
15126	44,46
15127	46
15128	46
15129	46
15130	44
15131	46
15132	46
15133	44
15134	47
15135	46
15136	46
15137	44
15138	46
15139	46
15140	46
15141	44
15142	45
15143	46
15144	44
15145	46
15146	45
15147	43
15148	43
15150	45,46
15151	45,46,48
15152	46
15153	48
15154	47
15155	47
15156	48
15157	45,46
15158	44
15159	45
15164	47
15165	48
15166	44
15167	48
15168	46
15169	47
15170	47
15171	47
15172	48
15173	47,48
15174	48
15175	47
15176	47
15177	44
15178	47
15179	48
15180	47
15181	44
15182	48
15183	47
15184	47
15185	46
15186	44
15187	48
15188	47
15189	47
15189	47
15190	47
15191	48
15192	47
15193	43

Part #	Page #'s
15194	48
20001	119
20002	6,117
20003	119
20004	83
20005	83
20006	84
20007	50
20008	40
20009	37
20011	39
20014	96
20015	96
20017	97
20018	57
20019	40
20020	84
20021	84
20022	117
20023	83
20025	51
20026	51
20027	83
20028	83
20029	96
20030	96
20031	96
20032	96
20033	96
20034	86
20037	98
20038	74
20039	73
20043	51
20046	121
20047	57,58
20048	85
20049	83
20050	38
20051	96
20055	119
20055T	119
20056	50
20058R2	86
20059	119
20059G	119
20060	31,50
20061R2	49
20062	59,77
20063	50
20067	38
20070B	85
20072	87
20073	87
20074	88
20075	88
20076	97
20077	83
20078	77
20079	73
20080	77
20081	77
20085	118
20086	10,118
20087	118
20088	77
20089	118

Part #	Page #'s
20090	118
20092	114
20093	114
20095	21,25,26 113
20099R2	24,29,30,74
20100	77
20101	29,30,81
20102	24,30,114
20103	29,114
20104	26,114
20105	27,114
20105	114
20106	28,114
20108	9,114
20109	114
20110	17,114
20111	114
20112	114
20113	25,25,26 27,81
20114	77
20115	29,30,81
20117	84
20118	115
20119	115
20120	115
20121	115
20122	115
20123	115
20124	10,113
20125A	78
20125B	6,10,78
20127	78
20129	6,10,78
20133	57,58
20134	96
20135	59,77
20137	82
20138	82
20139	82
20140	60
20142	79
20143	114
20144	5
20144B	79
20145	117
20147	5,116
20149A	59
20149B	5,59,79
20150	84
20151	26,26,29 30,81
20154	39
20155	39
20157	57
20158	57
20159	57
20160	58
20161	58
20162	58
20164	58
20165	58
20166	58
20167	58
20168	58
20169	58

PART PAGE

Part #	Page #'s
20170	58
20171	58
20172	57,58
20173	24,81
20174	81
20175A-3	59,78
20175B-4	6,59,78
20176	82
20177	82
20178A	77
20178C	77
20178D	77
20179	41
20180	41
20181	99
20182	100
20185	22,27,28 113
20185O	31,32,113
20186	98
20188	84
20190	122
20191	122
20192	122
20193	122
20194	74
20195	87
20196	88
20197	53
20199	113
20200	113
20201	78
20202	114
20203	85
20204	9
20204	17,17,19 20,77,78
20205	51
20206	51
20207	51
20208	35
20209	36
20210	37
20212	74
20213	114
20214	19,114
20215	19,20,32,41
20216	18,19,20
20219	55
20220	21
20220	22,80
20221	80
20222	22,114
20223	21,114
20224	119
20225	23,114
20225N	114
20226	19,113
20227	77
20229	105
20230	106
20231	92
20232	91,92
20233	55
20234	17,116
20239	98
20247	73

Part #	Page #'s
20248	73
20250	25,114
20255	61
20256	61
20257	61
20258	61
20259	61
20260	62
20261	61
20262	61
20263	63
20264	63
20265	63
20266	65,66
20267	67,68
20268	63
20271	82
20272	82
20273	115
20274	10,115
20278	115
20279	50
20280	119
20282	115
20284	62
20285	62
20286	64
20287	64
20288	6,113
20289	9
20289	78
20290	78
20291	17,40
20292	17
20293	114
20294	114,127
20295	40
20296	6,114
20297	41
20298	53
20304	51
20305	51
20306	51
20307	51
20309	9,59,78
20310	89
20311	89
20312	89
20313	93
20314	94
20315	76
20316	49
20317	91
20318	63
20319	62,63
20320	63
20321	113
20322	113
20323	113
20325	101
20326	101
20327	102
20328	71
20329	71
20330	71
20331	71
20332	56

Part #	Page #'s
20333	56
20334	54
20335	54
20336	56
20337	93,94
20338	102
20347	52
20348	52
20349	103
20350	103
20351	104
20353	33,34
20354	72
20355	72
20356	72
20357	72
20359	72
20360	72
20361	72
20362	107
20363	108
20364	64
20366	33,34
20373	65
20374	65
20375	57
20376	57
20377	57
20378	95
20379	89
20380	122
20381	122
20382	31,32,80
20383	80
20384	31,32,60
20385	31,32,114
20386	72
20387	72
20388	95
20389	18,41
20390	97,114
20391	115
20392	114
20393	90
20394	90
20395	11,117
20396	59,79
20397	114
20398	3,4,79
20399	79
20400	84
20401	84
20402	4,116
20403	71
20407	121
20408	4,5,6,9,10 18,19,20,21 22,23,25,26 27,28,31,32 75
20408-1	25,26,27 28,75
20408-2	9,76
20408-3	18,19,20 76
20408-8	5,21,22 23,76

Part #	Page #'s
20408-9	4,76
20408-9	76
20408-10	6,10,76
20408-11	31,32,76
20409	109
20410	110
20411	110
20412	111
20413	111
20414	112
20415	73
20416	73
20417	73
20419	118
20420	73
20421	79
20422	90
20423	90
20425	3,5,79
20426	76
20427	11,116
20429	12,117
20430	12,114
20431	11
20432	120
20433	120
20434	113
20437	7,8,80
20438	7,8,80
20439	80
20440	80
20441	89
20443	7,8,59,80
20445	69
20446	70
20448	84
21213	20
23001	42
25003	82
25011	82
25012	82
25054	71
25055	71
25056	82
30003	117
30003T	117
30004	118
30006	118
60001	127
60002	123
60003	124
60004	125,126
60005	125,126
60006	125,126
60007	125,126
90005	128
90006	128
90034	128
90086	128
90149	127
90220	127
90221	127
90222	127
90223	127
90224	127
90344	128

SAFETY FIRST !

Breaking Capacity or Maximum Load is generally considered to be the breaking load of a component.
Breaking Capacity is an average figure at which samples have been found to break under laboratory conditions.
These conditions are rarely duplicated in actual use.
Breaking Capacity or Maximum Load should not be used as a criteria for service, design or rating purposes.
Use Working Load Limit (WLL).

Working Load Limit (WLL): The maximum mass or force which a product is authorized to support in general service when pull is applied in-line with respect to the centerline of the product. Avoid side loading.

Shock Loads: Loads which exceed the static load caused by rapid change of movement such as jerking, impacting, or swinging of loads. Avoid Shock Loads! Rigging equipment should be replaced after being subjected to shock loads!

Matching Components: All attachments used with wire rope and chain must be of suitable material and WLL. The assembly WLL will be equal to the WLL of the lowest rated part of the assembly.Use common sense! "A chain is only as strong as its weakest link!" (For example: If you use a 10k WLL strap with a 9.5k WLL shackle and a 8k WLL snatch block the Rigging Assembly WLL is equal to 8k)

Inspection: No product can operate indefinitely at its rated capacity or WLL. Wire rope, chain, shackles, snatch blocks, straps etc. must all be inspected regularly for visible damage, distortion, elongation, corrosion, cracks, nicks, or abrasion which may cause failure or reduce the strength or ability of the products to perform safely.
If any of these conditions exist the product should be removed from service and replaced!
Safety First!

BULLDOG WINCH CO.,LLC
8644 W LUDLOW DR STE 17
PEORIA, AZ 85381-3821
623-581-0121 tel
orders@bulldogwinch.com
www.bulldogwinch.com

BULLDOG WINCH®

NATDA North American Trailer Dealers Association MEMBER 2020

NTEA THE WORK TRUCK ASSOCIATION

Version A-2024